

20

25

# Indoor Lighting

## DT category

---

DT035-6W



034

DT035N-6W



034

DT045-6W



035

DT045N-6W



035

DT055-8W



038

DT055-N-8W



038

DT065-10W



039

DT065-N-10W



039

DT080-15W



040

DT080-N-15W



040

DT100-25W



041

DT100-N-25W



041

DT125-35W



042

DT125-N-35W



042

DT055-S-8W



045

DT055-SN-8W



045

DT065-S-10W



046

DT065-SN-10W



046

DT080-S-15W



047

DT080-SN-15W



047

DT100-S-25W



048

DT100-SN-25W



048

DT125-S-35W



049

DT125-SN-35W



049

DT055-2S-8W



050

DT055-2SN-8W



050

DT065-2S-10W



051

DT065-2SN-10W



051

DT080-2S-15W



052

DT080-2SN-15W



052

## Indoor Lighting

### DT category

DT100-2S-25W



053

DT100-2SN-25W



053

DT125-2S-35W



054

DT125-2SN-35W



054

DT055A-6W



063

DT055A-N-6W



063

DT065A-8W



064

DT065A-N-8W



064

DT080A-12W



065

DT080A-N-12W



065

DT100A-15W



066

DT100A-N-15W



066

DT125A-20W



067

DT125A-N-20W



067

DT055A-S-6W



069

DT055A-SN-6W



069

DT065A-S-8W



070

DT065A-SN-8W



070

DT080A-S-12W



071

DT080A-SN-12W



071

DT100A-S-15W



072

DT100A-SN-15W



072

DT125A-S-20W



073

DT125A-SN-20W



073

DT055A-2S-6W



074

DT055A-2SN-6W



074

DT065A-2S-8W



075

DT065A-2SN-8W



075

DT080A-2S-12W



076

DT080A-2SN-12W



076

## Indoor Lighting

### DT category

DT100A-2S-15W



077

DT100A-2SN-15W



077

DT125A-2S-20W



078

DT125A-2SN-20W



078

DT055B-8W



087

DT055B-N-8W



087

DT065B-10W



088

DT06B-N-10W



088

DT080B-15W



089

DT080B-N-15W



089

DT100B-25W



091

DT100B-N-25W



091

DT125B-35W



092

DT125B-N-35W



092

DT055B-S-8W



093

DT055B-SN-8W



093

DT065B-S-10W



094

DT06B-SN-10W



094

DT080B-S-15W



095

DT080B-SN-15W



095

DT100B-S-25W



096

DT100B-SN-25W



096

DT125B-S-35W



097

DT125B-SN-35W



097

DT055B-2S-8W



098

DT055B-2SN-8W



098

DT065B-2S-10W



099

DT06B-2SN-10W



099

DT080B-2S-15W



100

DT080B-2SN-15W



100

## Indoor Lighting

### DT category

DT100B-2S-25W



101

DT100B-2SN-25W



101

DT125B-2S-35W



102

DT125B-2SN-35W



102

DT055C-5W



107

DT055C-N-5W



107

DT065C-7W



108

DT065C-N-7W



108

DT080C-10W



109

DT080C-N-10W



109

DT100C-15W



111

DT100C-N-15W



111

DT125C-20W



112

DT125C-N-20W



112

DT055C-S-5W



113

DT055C-SN-5W



113

DT065C-S-7W



114

DT065C-SN-7W



114

DT080C-S-10W



115

DT080C-SN-10W



115

DT100C-S-15W



116

DT100C-SN-15W



116

DT125C-S-20W



117

DT125C-SN-20W



117

DT055C-2S-5W



118

DT055C-2SN-5W



118

DT065C-2S-7W



119

DT065C-2SN-7W



119

DT080C-2S-10W



120

DT080C-2SN-10W



120

## Indoor Lighting

### DT category

DT100C-2S-15W



121

DT100C-2SN-15W



121

DT125C-2S-20W



122

DT125C-2SN-20W



122

DT055D-6W



129

DT055D-N-6W



129

DT065D-8W



130

DT065D-N-8W



130

DT080D-12W



131

DT080D-N-12W



131

DT100D-20W



133

DT100D-N-20W



133

DT125D-25W



134

DT125D-N-25W



134

DT055D-S-6W



135

DT055D-SN-6W



135

DT065D-S-8W



136

DT065D-SN-8W



136

DT080D-S-12W



137

DT080D-SN-12W



137

DT100D-S-20W



138

DT100D-SN-20W



138

DT125D-S-25W



139

DT125D-SN-25W



139

DT055D-2S-6W



140

DT055D-2SN-6W



140

DT065D-2S-8W



141

DT065D-2SN-8W



141

DT080D-2S-12W



142

DT080D-2SN-12W



142

## Indoor Lighting

### DT category

DT100D-2S-20W



143

DT100D-2SN-20W



143

DT125D-2S-25W



144

DT125D-2SN-25W



144

DT80E-2\*4W



147

DT80E-N-2\*4W



147

DT100E-2\*6W



148

DT100E-N-2\*6W



148

DT080E-S-2\*10W



149

DT080E-SN-2\*10W



149

DT80E-S-2\*4W



151

DT80E-SN-2\*4W



151

DT100E-S-2\*6W



152

DT100E-SN-2\*6W



152

DT080E-S-2\*10W



153

DT080E-SN-2\*10W



153

DT80E-2S-4\*4W



154

DT80E-2SN-4\*4W



154

DT100E-2S-4\*6W



155

DT100E-2SN-4\*6W



155

DT080E-2S-4\*10W



156

DT080E-2SN-4\*10W



156

DT055H-8W



161

DT065H-10W



161

DT080H-15W



162

DT055K-8W



166

DT065K-10W



167

DT080K-15W



168

## Indoor Lighting

### DT category

DT055Q-A



178

DT065Q-A



178

DT080Q-A



178

DT055Q



179

DT055Q-N



179

DT065Q



179

DT065Q-N



180

DT080Q



180

DT080Q-N



180

DT055G-8W



190

DT065G-10W



191

DT080G-12W



192

DT100G-20W



193

DT125G-30W



194

DT055T-10W



199

DT055T-N-10W



199

DT065T-10W



200

DT065T-N-10W



200

DT080T-15W



201

DT080T-N-15W



201

DT055T-S-10W



202

DT055T-SN-10W



202

DT065T-S-10W



203

DT065T-SN-10W



203

DT080T-S-15W



205

DT080T-SN-15W



205

DT055T-2S-10W



206

DT055T-2SN-10W



206

DT065T-2S-10W



207

DT065T-2SN-10W



207

DT080T-2S-15W



208

DT080T-2SN-15W



208

## Indoor Lighting

### DT category

DT055F-8W	DT055F-N-8W	DT065F-10W	DT065F-N-10W	DT080F-15W	DT080F-N-15W
					
211	211	212	212	213	213
DT055F-S-8W	DT055F-SN-8W	DT065F-S-10W	DT065F-SN-10W	DT080F-S-15W	DT080F-SN-15W
					
215	215	216	216	217	217
DT055F-2S-8W	DT055F-2SN-8W	DT065F-2S-10W	DT065F-2SN-10W	DT080F-2S-15W	DT080F-2SN-15W
					
218	218	219	219	220	220
DT055L-8W	DT055L-N-8W	DT065L-10W	DT065L-N-10W	DT080L-15W	DT080L-N-15W
					
222	222	223	223	224	224
DTM065B	DTM080B	DTM100B	DTM125B	DTM125B-H	
					
229	229	229	230	230	
DTM055C	DTM065C	DTM080C	DTM100C	DTM125C	
					
233	223	223	224	224	

## Indoor Lighting

### DT category

DTM055D	DTM065D	DTM080D	DTM100D	DTM125D	
					
237	237	237	238	238	
DTM055A-6W	DTM055A-8W	DTM065A-8W	DTM065A-10W	DTM080A-12W	DTM080A-15W
					
241	241	242	242	243	243
DTM100A-15W	DTM100A-20W	DTM125A-20W	DTM125A-25W		
					
245	245	246	246		
DTM055Q	DTM065Q	DTM080Q			
					
278	248	248			





A055-8

A055-12

A055-15



B055-1



B055-2



Honey Comb Spread Optics Solite Optics



C055



C005-N



C055-S



C055-SN



C055-2S



C055-2SN



C055K



C055H



D055



D055F



D055L



D055-S



D055FS



D055-S-1





A055T



A055Q



A055D



A055C



A055A



A055T-S



C055M



C055



C005-N



C055-S



C055-SN



C055-2S



C055-2SN



Honey Comb



Spread Optics




Solite Optics



D055-S-1



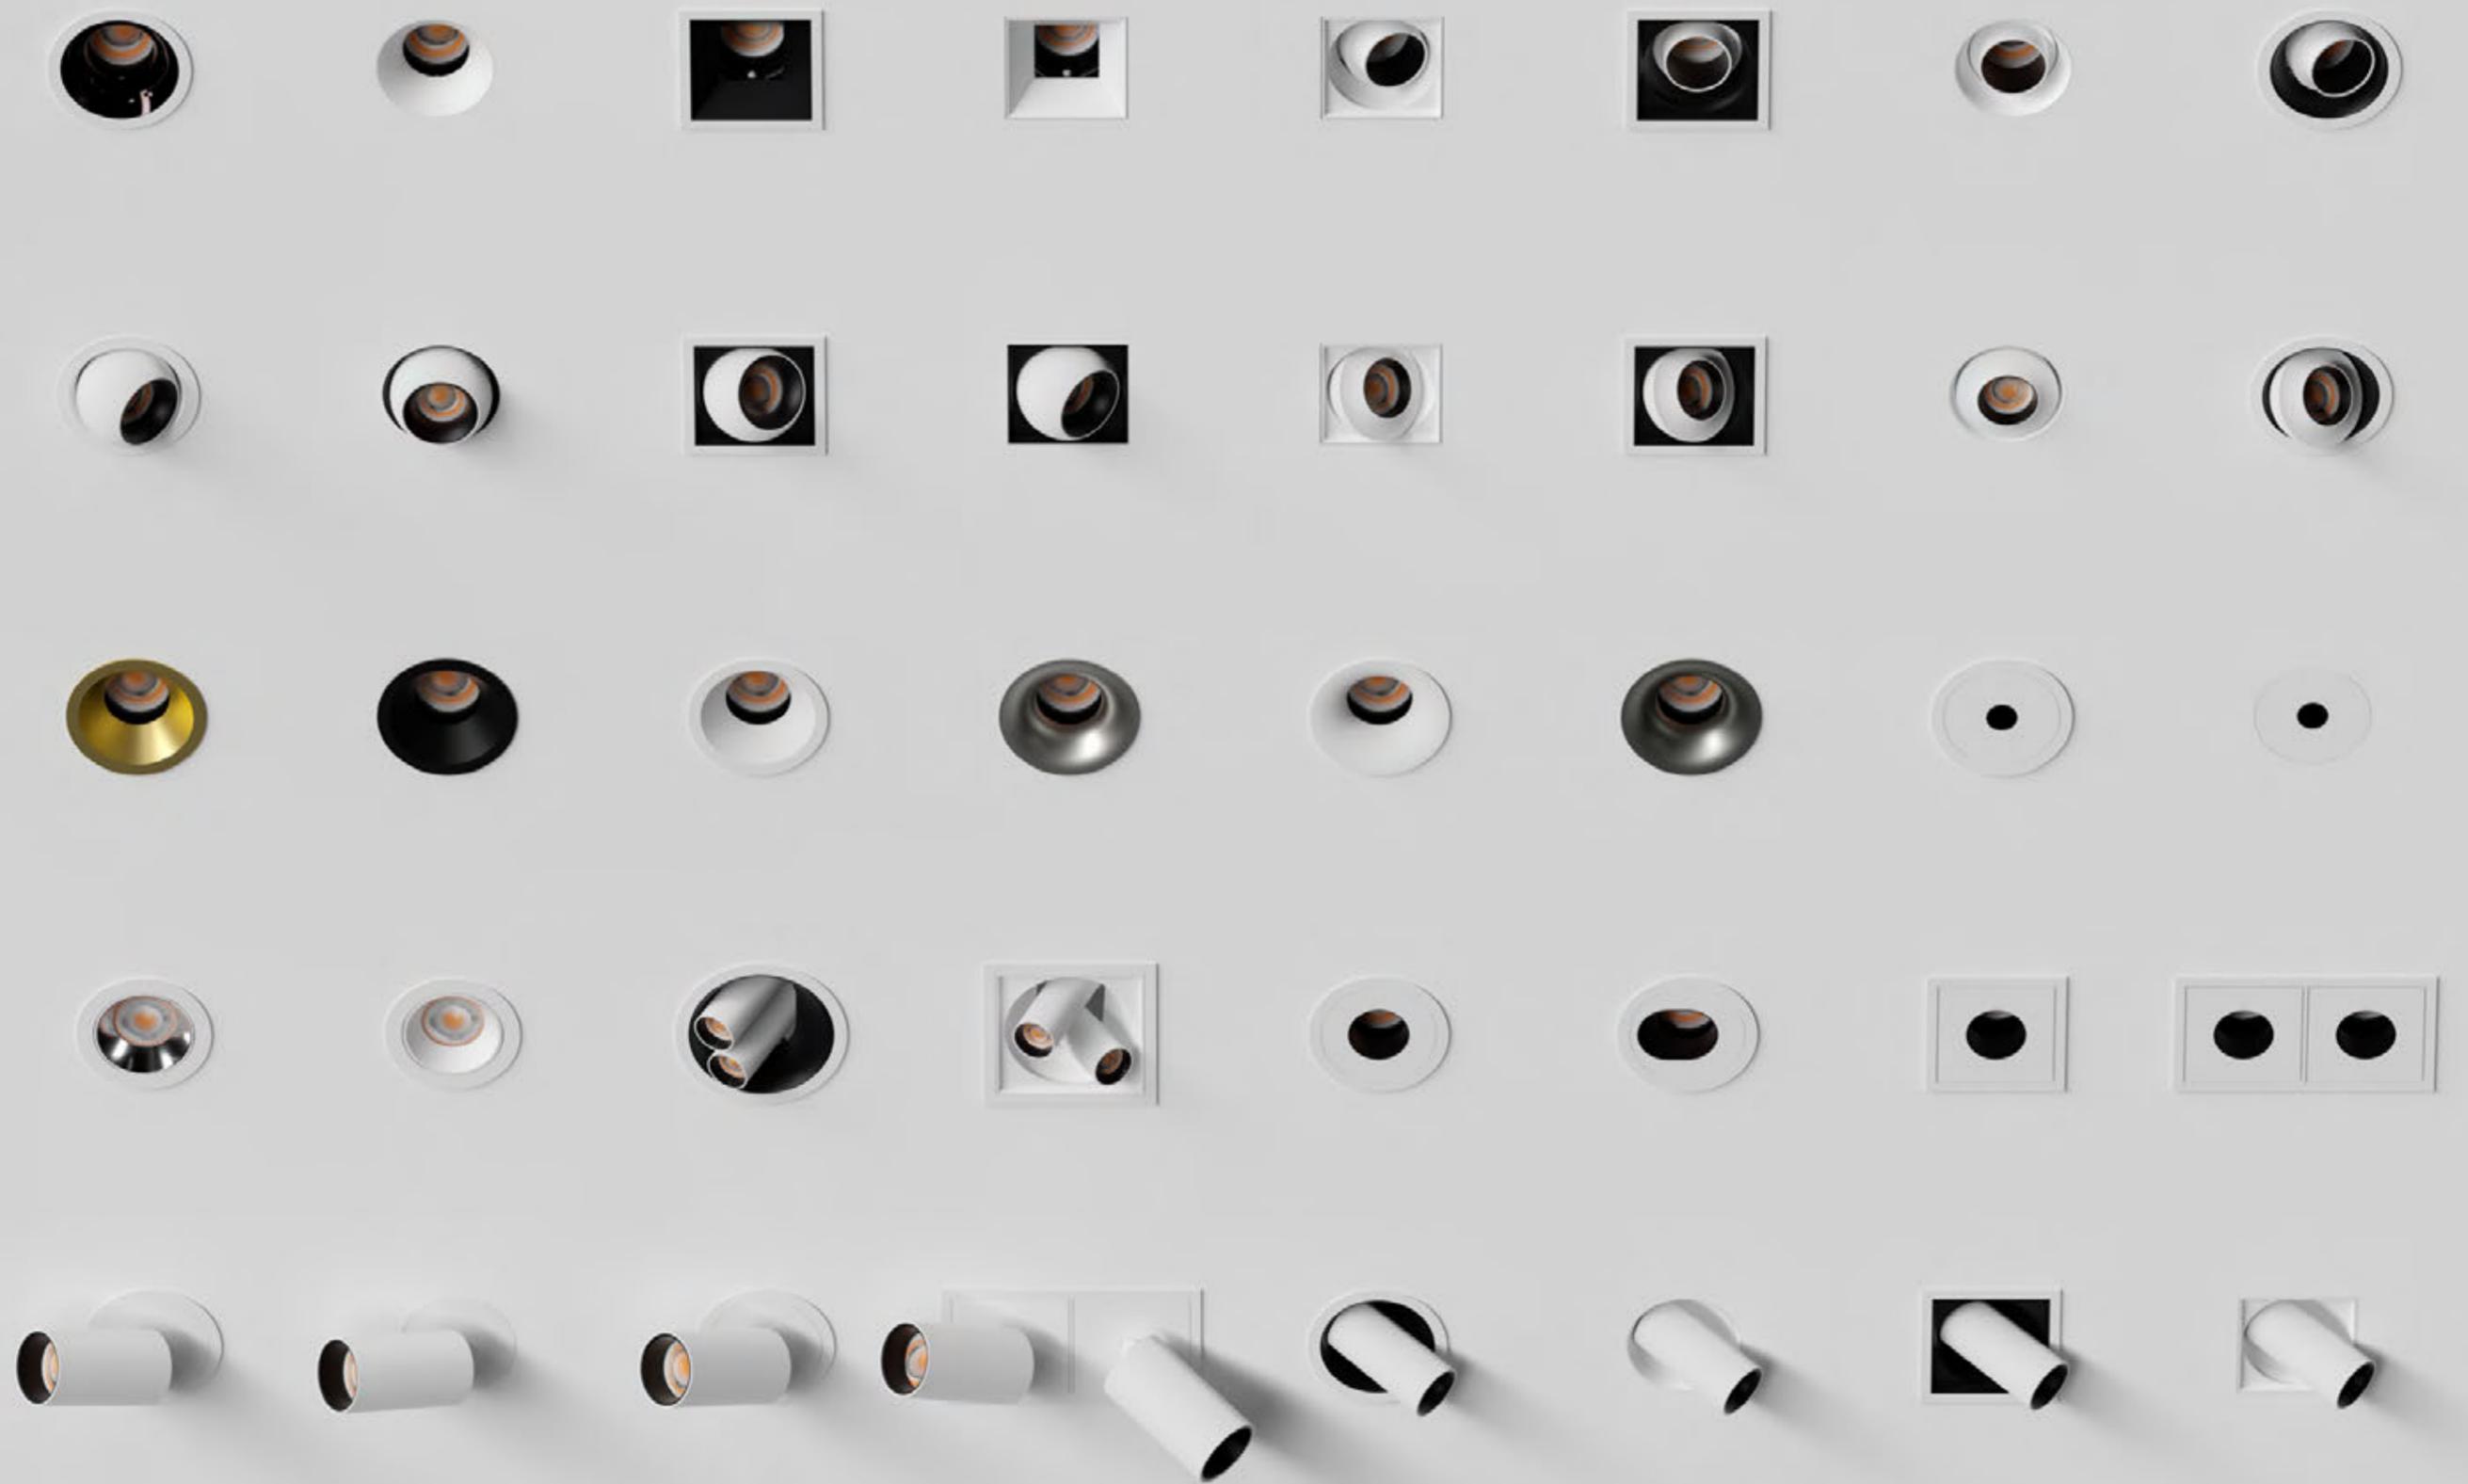

## Flexible assembly

We have a rich accessory system, and all accessories support manual replacement. Adjust the main color tone of the indoor space by replacing different lower reflectors. The light distribution can be changed through optical components to meet the lighting environment requirements of space. Six installation components enable better integration into different interior decoration styles.

Lamp body



Circular reflector



Square reflector



Middle Ring



Optical accessories



Round Trim Part



Square Trim Part



35mm 45mm 55mm 65mm 80mm 100mm 125mm

Round-Trim



Round-Trimless



Square-Trim



Square-Trimless



Double head-Trim




Double head-Trimless



## APPLICATION

Different cutout to meet with different requirements of the light space

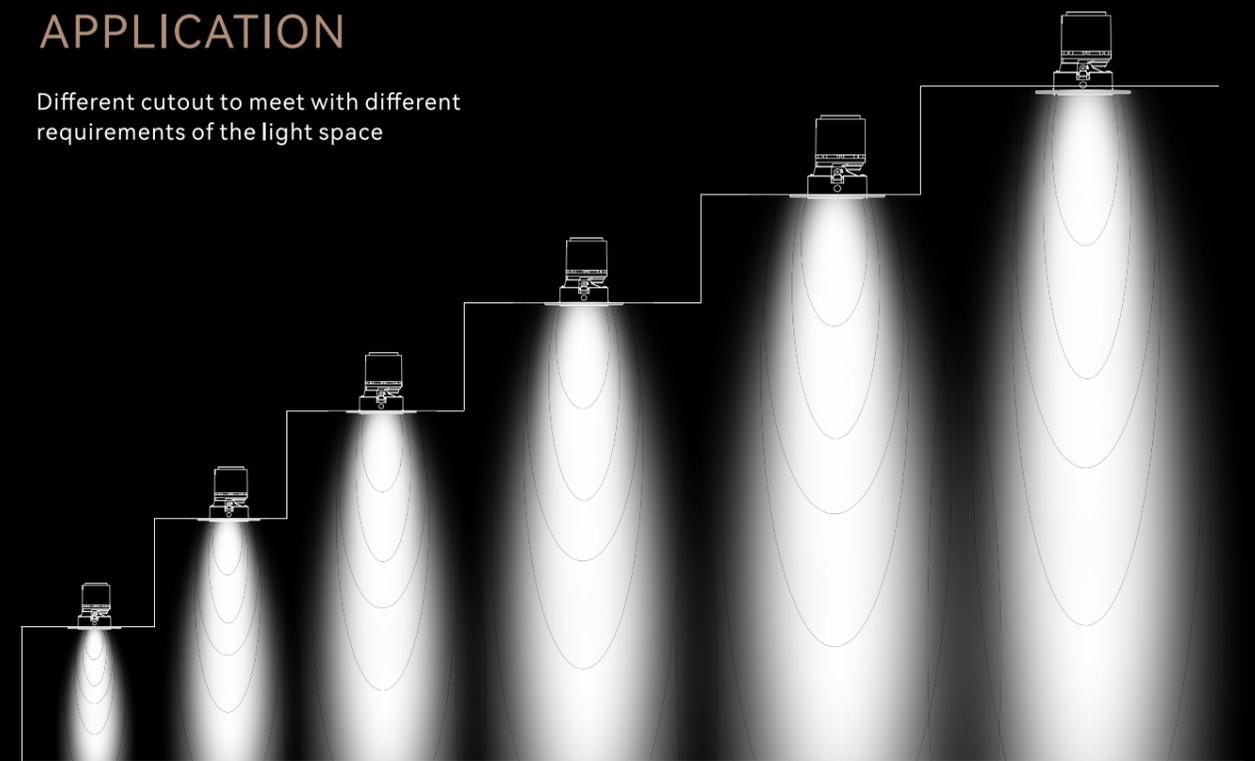

45mm  
Max8W

55mm  
Max15W

65mm  
Max18W


80mm  
Max25W

100mm  
Max35W

125mm  
Max40W



**30° Tilt**

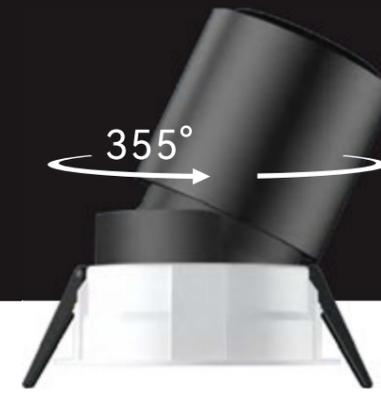

**355° Rotation**



**Adjustable**

A scale is marked on the lamp body without removing it to adjust the light direction.



**Pull-out Ring**

Delicate ring design which is easy for rotation and can pull out the lamp body easily once it needs maintenance.



**Blackout Design**

No light leakage happens while adjusting the angle in any direction with this full blackout design.



**Easy Installation**

Easy installation and easy to change the anti-glare ring or adjust the direction of the lamp.




**Angle Adjustment**

Supported with vertical adjustable by 0°~30° and changes the lighting direction with parallel adjustment.



**Tempered Springs**

Easy installation with strength by using the springs

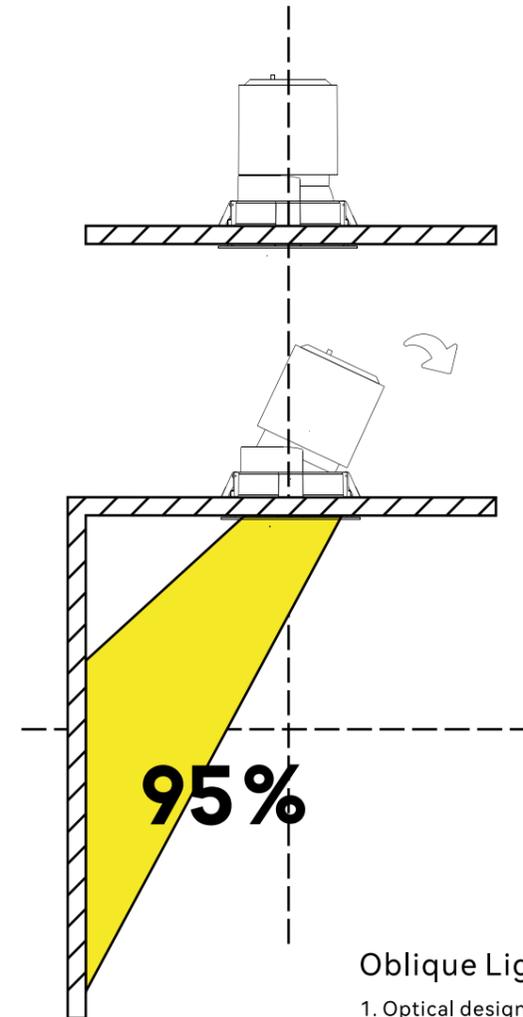


**Oblique Light Design**

- 1. Optical design with adjustable oblique angle
- 2. More than 95% light output with ultimate light effect
- 3. Multi-angle lighting effect design




### Precise Light Control

The light effect can be designed according to the optics to control the light precisely with clear circular spot




### Deep Anti-Glare

Deep down structural design with 60° light angle to further control the light centrally



### Muti-Angle Optional

15°/24°/36°/50° are optional to be up to different requirements of lighting space



### Optics

3 types of optic accessories to meet up with different requirements for the anti-glare effect



### Modulator



### CCT CHANGEABLE BY MODULATOR



Choose 1	2700K	3200K	4000K
Choose 2	3000K	3500K	4000K
Choose 3	3000K	4000K	5000K



Honey Comb




Spread Lens



Solite Lens





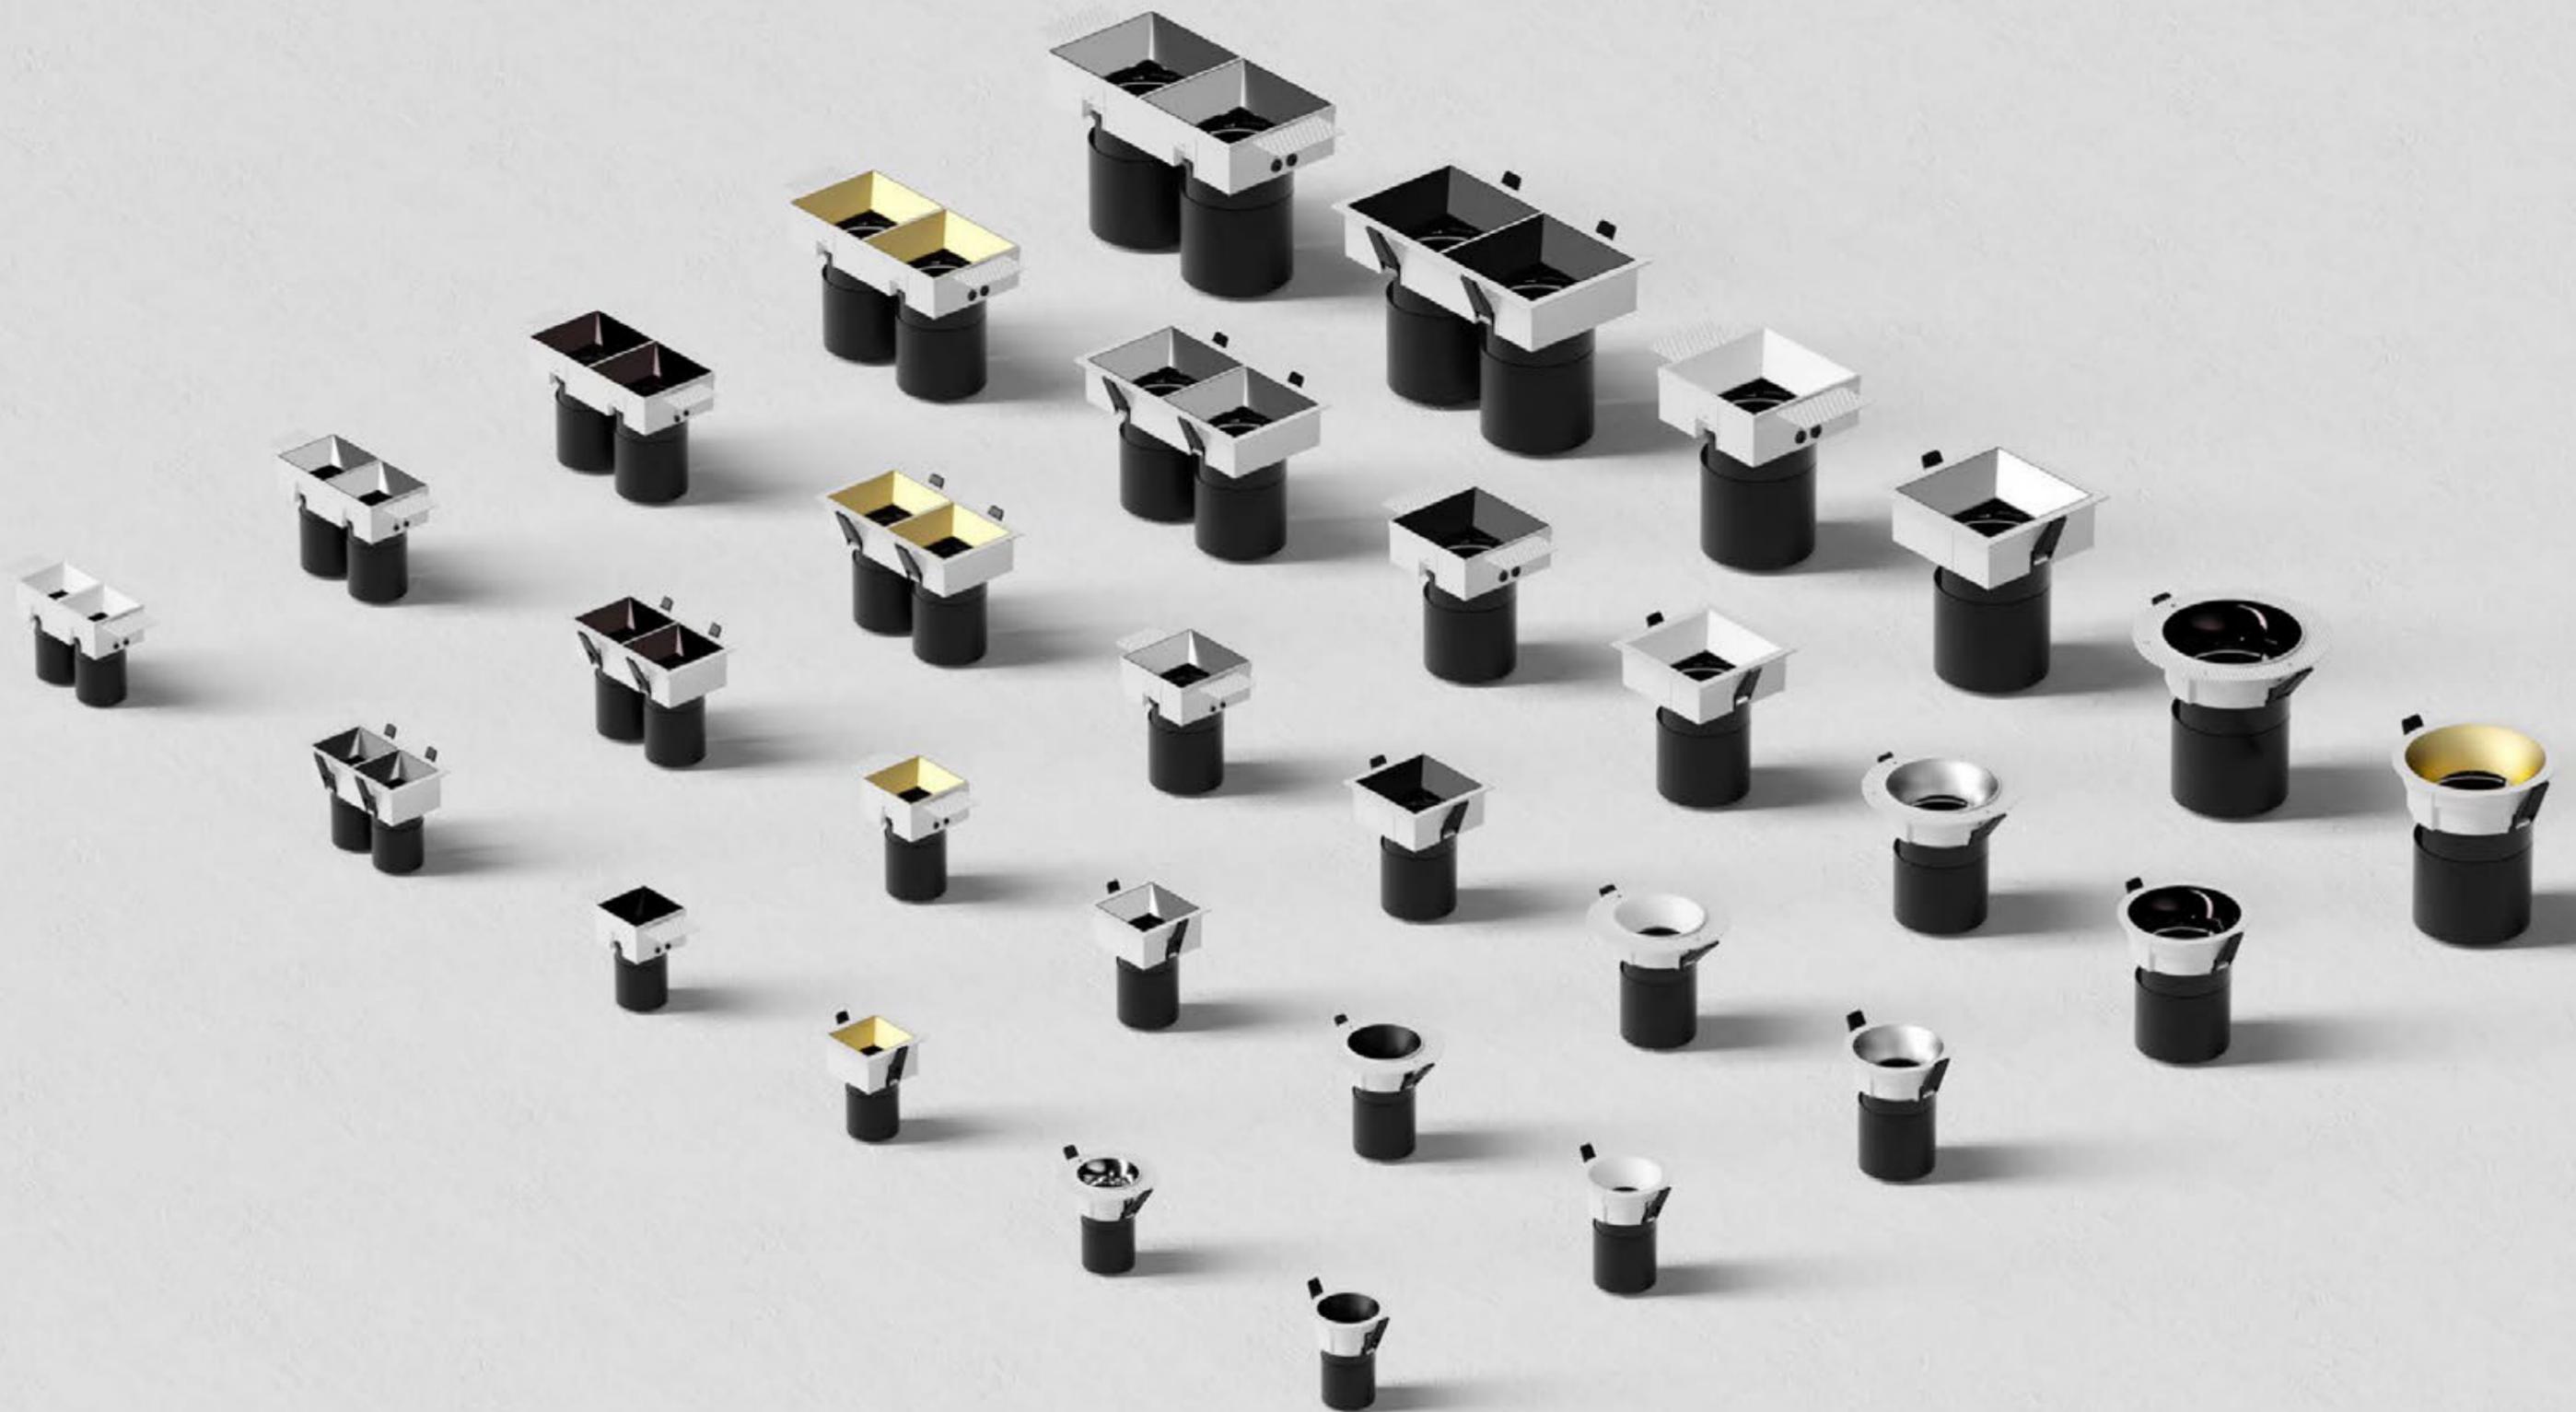

SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3




RoHS





CE



DT035



DT035-6W



DT035-N-6W



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT035-6W	MAX 6W	36V	150mA	24°/36°/50°	422 lm	90	20/44	Embedded
DT035-N-6W	MAX 6W	36V	150mA	24°/36°/50°	422 lm	90	20/44	

Reflector




Optical accessories








DT045-6W



DT045-8W



DT045-N-6W



DT045-N-8W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT045-6W	MAX 6W	36V	150mA	24°/36°/50°	453 lm	90	20/44	Embedded
DT045-8W	MAX 8W	36V	200mA	24°/36°/50°	605 lm	90	20/44	
DT045-N-6W	MAX 6W	36V	150mA	24°/36°/50°	453 lm	90	20/44	
DT045-N-8W	MAX 8W	36V	200mA	24°/36°/50°	605 lm	90	20/44	

Reflector



Matt White Matt Black Chrome Dark Chrome Gold Matt silver


Optical accessories



Honey Comb Spread Optics Solite Optics





2700K | 3000K | 3500K | 4000K | 5000K

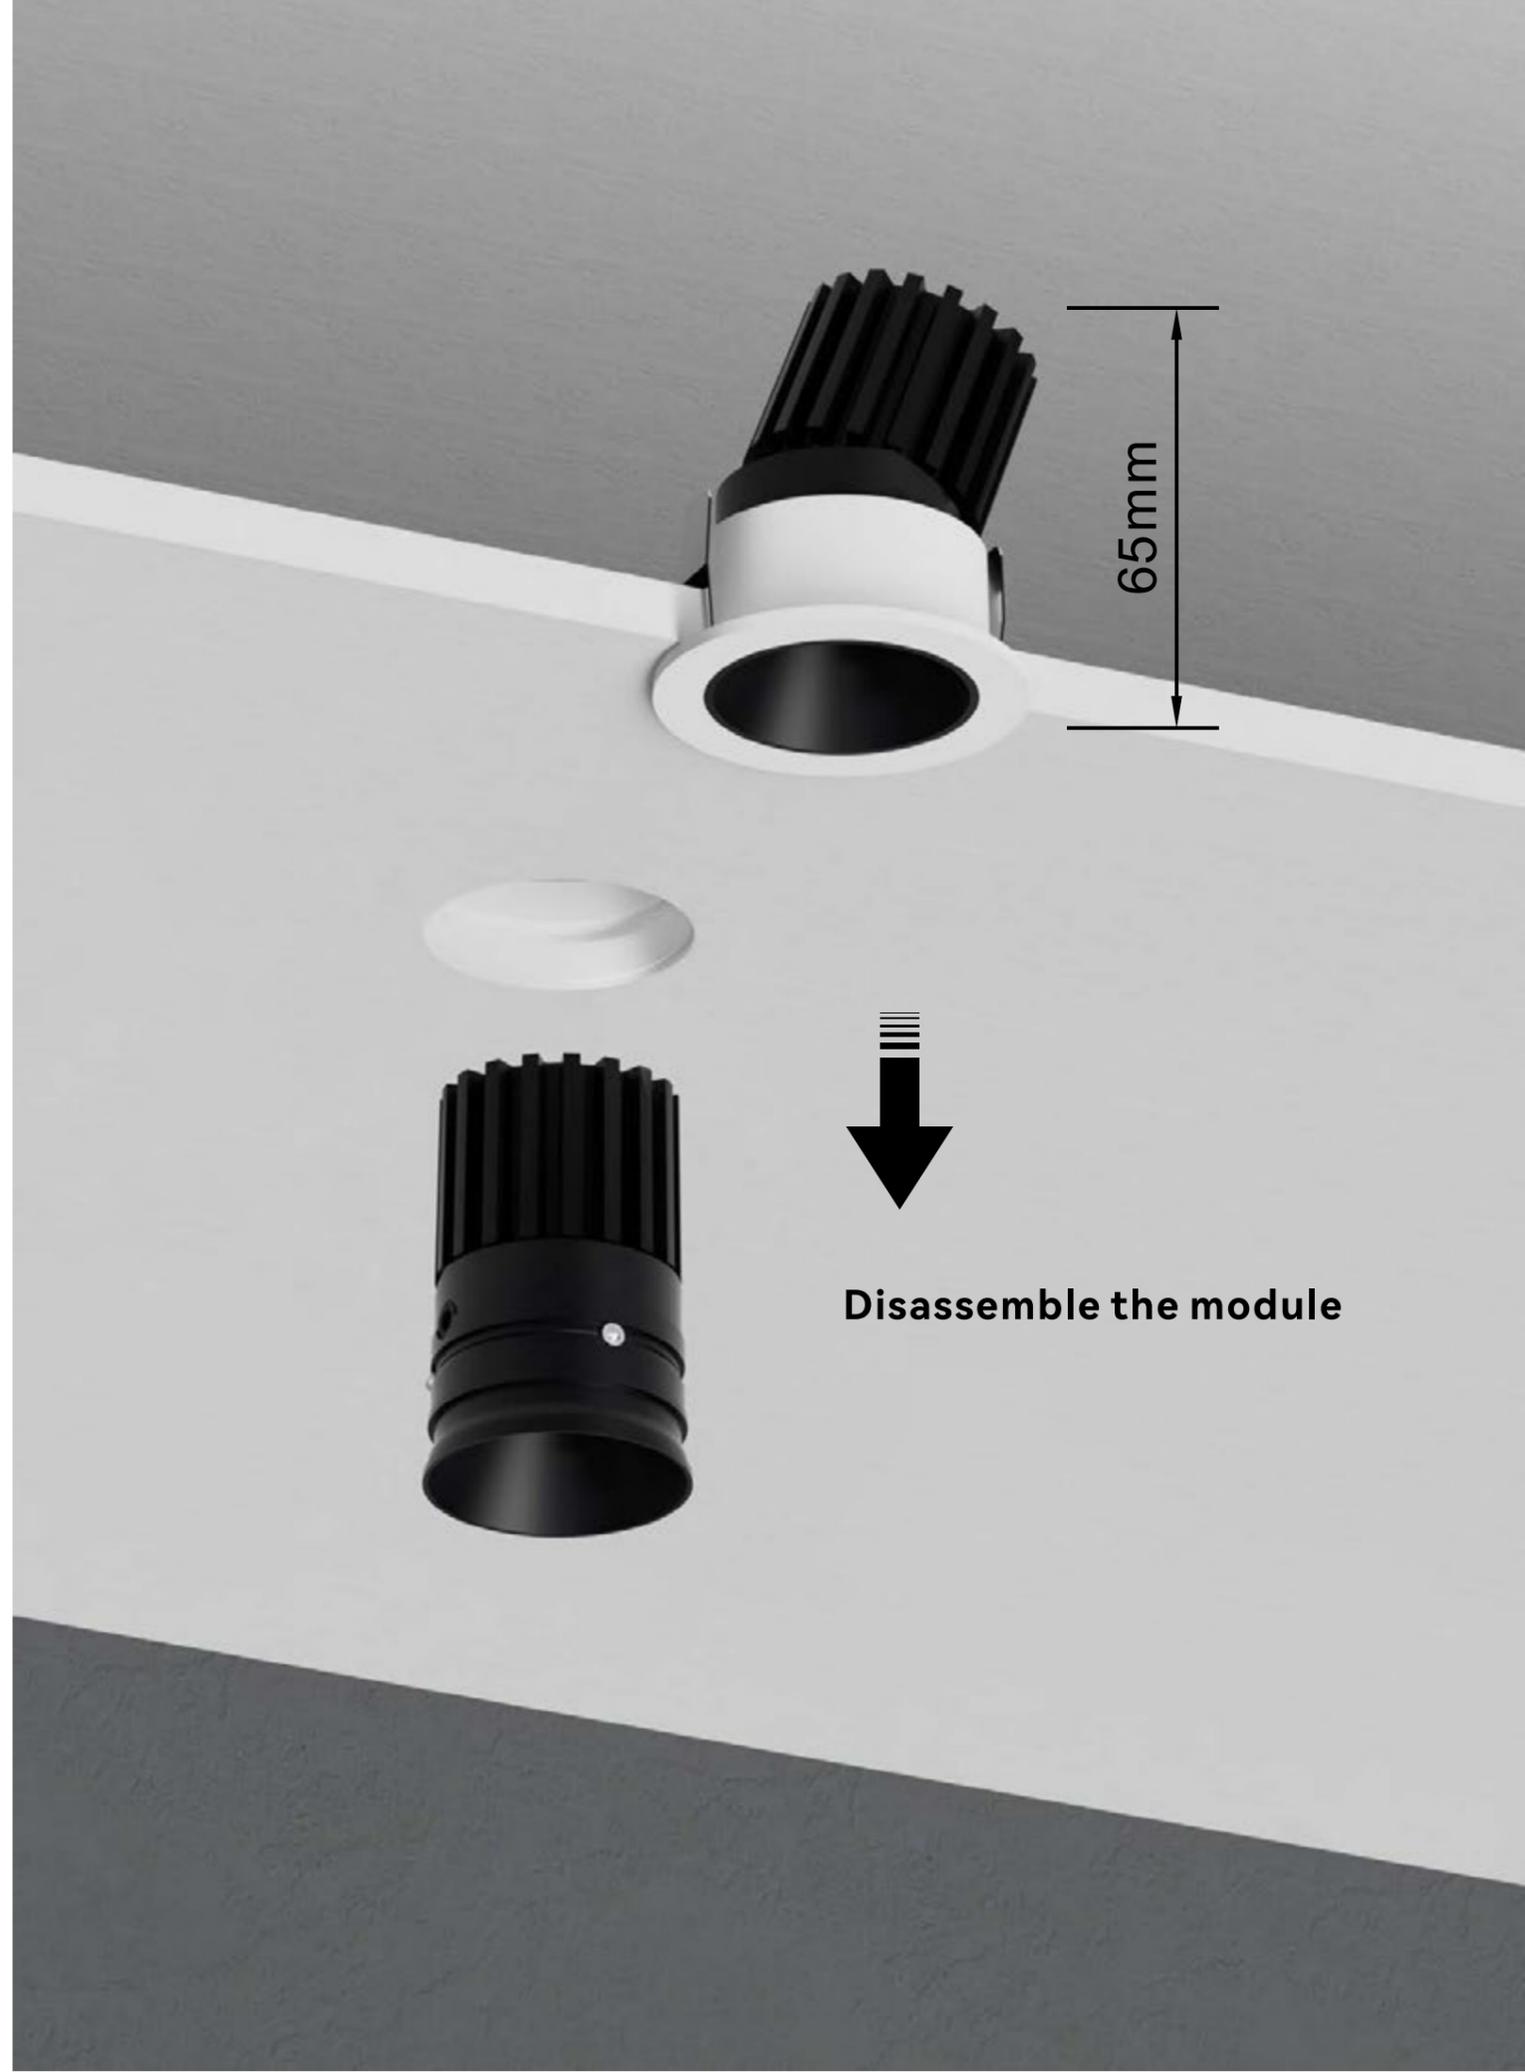




Disassemble the module

DT055




Ø55-58mm

DT055-8W




Ø55-58mm

DT055-12W




Ø55-58mm

DT055-15W




Ø55mm

DT055-N-8W



Ø55mm

DT055-N-12W



Ø55mm

DT055-N-15W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	Embedded
DT055-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	
DT055-N-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	
DT055-N-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055-N-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	

Reflector



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

Optical accessories




Honey Comb Spread Optics Solite Optics




2700K | 3000K | 3500K | 4000K | 5000K


DT065




DT065-10W




DT065-15W




DT065-18W



DT065-N-10W



DT065-N-15W



DT065-N-18W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	Embedded
DT065-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	
DT065-N-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	
DT065-N-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065-N-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	

Reflector




Optical accessories




2700K | 3000K | 3500K | 4000K | 5000K


DT080




DT080-15W




DT080-20W




DT080-25W



DT080-N-15W



DT080-N-20W

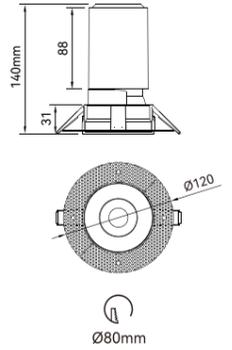

DT080-N-25W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	Embedded
DT080-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	
DT080-N-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	
DT080-N-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080-N-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	

Reflector





Optical accessories




2700K | 3000K | 3500K | 4000K | 5000K



**DT100**




**DT100-25W**



**DT100-35W**



**DT100-N-25W**



**DT100-N-35W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	Embedded
DT100-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	
DT100-N-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	
DT100-N-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver


**Optical accessories**




Honey Comb Spread Optics Solite Optics

2700K | 3000K | 3500K | 4000K | 5000K


**DT125**




**DT125-35W**



**DT125-40W**

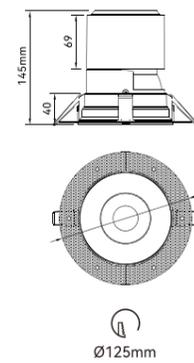

**DT125-N-35W**

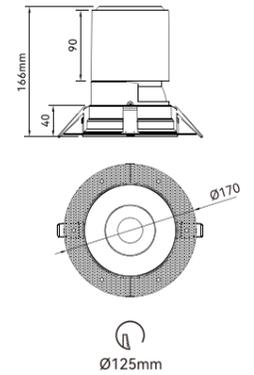

**DT125-N-40W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	Embedded
DT125-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	
DT125-N-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	
DT125-N-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**






Honey Comb Spread Optics Solite Optics

2700K | 3000K | 3500K | 4000K | 5000K





DT055-S





Ø55\*55mm

DT055-S-8W






Ø55\*55mm

DT055-S-12W





Ø55\*55mm

DT055-S-15W





Ø55\*60mm

DT055-SN-8W



Ø55\*60mm

DT055-SN-12W



Ø55\*60mm

DT055-SN-15W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055-S-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	Embedded
DT055-S-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055-S-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	
DT055-SN-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	
DT055-SN-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055-SN-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	

Reflector



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

Optical accessories






Honey Comb Spread Optics Solite Optics

Chip Brand





2700K | 3000K | 3500K | 4000K | 5000K

DT065-S





Ø65\*65mm

DT065-S-10W





Ø65\*65mm

DT065-S-15W





Ø65\*65mm

DT065-S-18W





Ø65\*70mm

DT065-SN-10W



Ø65\*70mm

DT065-SN-15W



Ø65\*70mm

DT065-SN-18W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065-S-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	Embedded
DT065-S-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065-S-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	
DT065-SN-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	
DT065-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065-SN-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	

Reflector



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K


**DT080-S**





**DT080-S-15W**




**DT080-S-20W**




**DT080-S-25W**



**DT080-SN-15W**



**DT080-SN-20W**



**DT080-SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080-S-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	Embedded
DT080-S-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080-S-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	
DT080-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	
DT080-SN-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080-SN-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**




Honey Comb Spread Optics Solite Optics

**Chip Brand**




2700K | 3000K | 3500K | 4000K | 5000K


**DT100-S**




**DT100-S-25W**



**DT100-S-35W**



**DT100-SN-25W**



**DT100-SN-35W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100-S-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	Embedded
DT100-S-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	
DT100-SN-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	
DT100-SN-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**






Honey Comb Spread Optics Solite Optics

**Chip Brand**





2700K | 3000K | 3500K | 4000K | 5000K




**DT125-S**





**DT125-S-35W**



**DT125-S-40W**



**DT125-SN-35W**



**DT125-SN-40W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125-S-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	Embedded
DT125-S-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	
DT125-SN-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	
DT125-SN-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	

**Reflector**






**Optical accessories**




**Chip Brand**




**DT055-2S**




**DT055-2S-8W**




**DT055-2S-12W**




**DT055-2S-15W**



**DT055-2SN-8W**



**DT055-2SN-12W**



**DT055-2SN-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055-2S-8W	MAX 2*8W	36V	200mA	20°/30°/40°/50°	2*641 lm	90	20/44	Embedded
DT055-2S-12W	MAX 2*12W	36V	300mA	20°/30°/40°/50°	2*963 lm	90	20/44	
DT055-2S-15W	MAX 2*15W	36V	350mA	20°/30°/40°/50°	2*1196 lm	90	20/44	
DT055-2SN-8W	MAX 2*8W	36V	200mA	20°/30°/40°/50°	2*641 lm	90	20/44	
DT055-2SN-12W	MAX 2*12W	36V	300mA	20°/30°/40°/50°	2*963 lm	90	20/44	
DT055-2SN-15W	MAX 2*15W	36V	350mA	20°/30°/40°/50°	2*1196 lm	90	20/44	

**Reflector**






**Optical accessories**




**Chip Brand**




**DT065-2S**





**DT065-2S-10W**




**DT065-2S-15W**




**DT065-2S-18W**



**DT065-2SN-10W**



**DT065-2SN-15W**



**DT065-2SN-18W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065-2S-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20/44	Embedded
DT065-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1017 lm	90	20/44	
DT065-2S-18W	MAX 2*18W	36V	400mA	18°/24°/36°/50°	2*1369 lm	90	20/44	
DT065-2SN-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20/44	
DT065-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1017 lm	90	20/44	
DT065-2SN-18W	MAX 2*18W	36V	400mA	18°/24°/36°/50°	2*1369 lm	90	20/44	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**





Honey Comb Spread Optics Solite Optics

**Chip Brand**





2700K | 3000K | 3500K | 4000K | 5000K



**DT080-2S**




**DT080-2S-15W**




**DT080-2S-20W**




**DT080-2S-25W**



**DT080-2SN-15W**



**DT080-2SN-20W**



**DT080-2SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1351 lm	90	20/44	Embedded
DT080-2S-20W	MAX 2*20W	36V	500mA	18°/24°/36°/50°	2*1812 lm	90	20/44	
DT080-2S-25W	MAX 2*25W	36V	600mA	18°/24°/36°/50°	2*2256 lm	90	20/44	
DT080-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1351 lm	90	20/44	
DT080-2SN-20W	MAX 2*20W	36V	500mA	18°/24°/36°/50°	2*1812 lm	90	20/44	
DT080-2SN-25W	MAX 2*25W	36V	600mA	18°/24°/36°/50°	2*2256 lm	90	20/44	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**



Honey Comb Spread Optics Solite Optics

**Chip Brand**





2700K | 3000K | 3500K | 4000K | 5000K

**DT100-2S**




**DT125-2S**





Ø200\*100mm

**DT100-2S-25W**




Ø200\*100mm

**DT100-2S-35W**





Ø250\*125mm

**DT125-2S-35W**




Ø250\*125mm

**DT125-2S-40W**





Ø205\*100mm

**DT100-2SN-25W**




Ø205\*100mm

**DT100-2SN-35W**



Ø255\*125mm

**DT125-2SN-35W**



Ø255\*125mm

**DT125-2SN-40W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100-2S-25W	MAX 2*25W	36V	600mA	20°/30°/40°/50°	2*2253 lm	90	20	Embedded
DT100-2S-35W	MAX 2*35W	36V	800mA	20°/30°/40°/50°	2*3146 lm	90	20	
DT100-2SN-25W	MAX 2*25W	36V	600mA	20°/30°/40°/50°	2*2253 lm	90	20	
DT100-2SN-35W	MAX 2*35W	36V	800mA	20°/30°/40°/50°	2*3146 lm	90	20	

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125-2S-35W	MAX 2*35W	36V	800mA	18°/24°/36°/50°	2*3152 lm	90	20	Embedded
DT125-2S-40W	MAX 2*40W	36V	1000mA	18°/24°/36°/50°	2*3594 lm	90	20	
DT125-2SN-35W	MAX 2*35W	36V	800mA	18°/24°/36°/50°	2*3152 lm	90	20	
DT125-2SN-40W	MAX 2*40W	36V	1000mA	18°/24°/36°/50°	2*3594 lm	90	20	

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**



Honey Comb Spread Optics Solite Optics

**Chip Brand**



2700K | 3000K | 3500K | 4000K | 5000K

**Reflector**



Matt White Matt Black Chrome Dark Chrome Gold Matt silver

**Optical accessories**




Honey Comb Spread Optics Solite Optics

**Chip Brand**



2700K | 3000K | 3500K | 4000K | 5000K



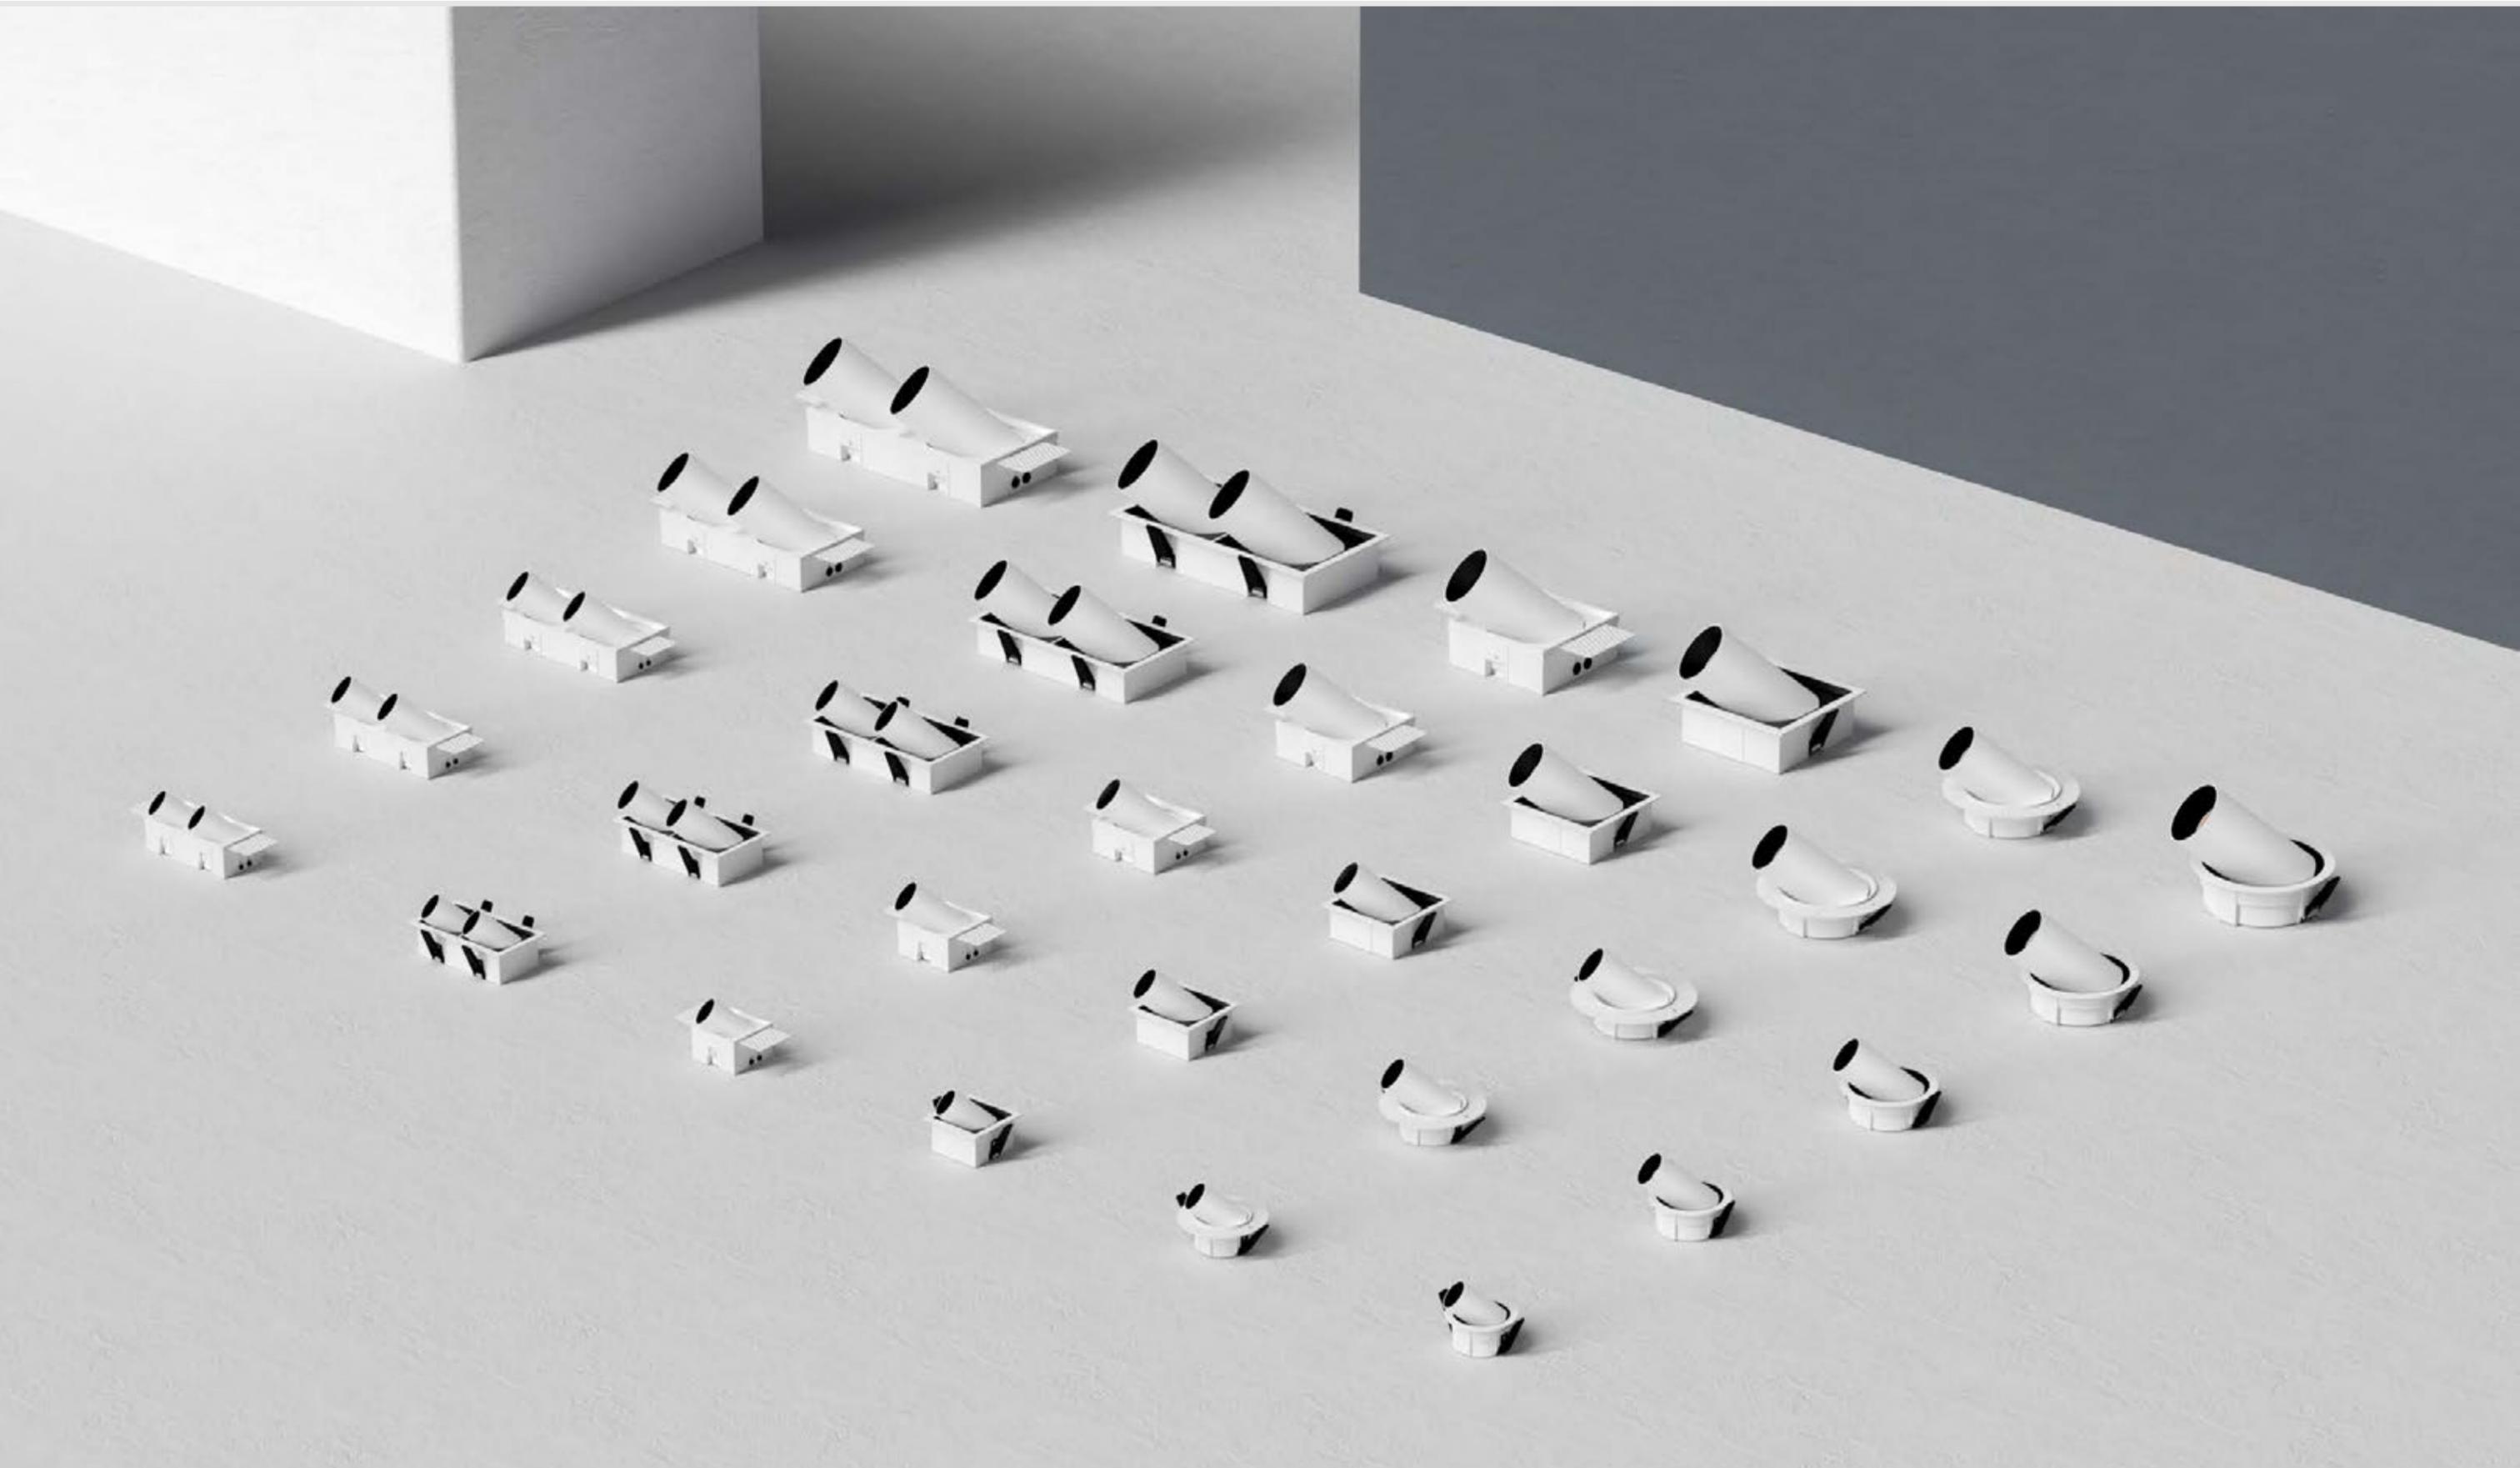

SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3



RoHS



CE



**Structural design.**

The lamp head can be adjusted left and right at an angle of 50°, and the overall module can be rotated by 355° to accurately adjust the lamp for optimal alignment. Therefore, the light is precisely directed to the desired location.



White



Black



Nickel



Matt Brass



Chrome



Matt Bronze





Matt Silver


LAMP BODY

**SEVEN  
COLOR CHOICES**



**DT055A**




**DT055A-6W**



**DT055A-8W**



**DT055A-N-6W**



**DT055A-N-8W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055A-6W	MAX 6W	36V	150mA	18°/24°/36°/60°	483 lm	90	20	Embedded
DT055A-8W	MAX 8W	36V	200mA	18°/24°/36°/60°	642 lm	90	20	
DT055A-N-6W	MAX 6W	36V	150mA	18°/24°/36°/60°	483 lm	90	20	
DT055A-N-8W	MAX 8W	36V	200mA	18°/24°/36°/60°	642 lm	90	20	

**Fixture color**




**Optical accessories**




2700K | 3000K | 3500K | 4000K | 5000K



**DT065A**




**DT065A-8W**



**DT065A-10W**




**DT065A-N-8W**



**DT065A-N-10W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065A-8W	MAX 8W	36V	200mA	18°/24°/36°/50°	680 lm	90	20	Embedded
DT065A-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20	
DT065A-N-8W	MAX 8W	36V	200mA	18°/24°/36°/50°	680 lm	90	20	
DT065A-N-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20	

**Fixture color**





**Optical accessories**




**Chip Brand**  
**PHILIPS** **LUMINUS** **CITIZEN** **CREE** **bridgelux**  
 2700K | 3000K | 3500K | 4000K | 5000K


**DT080A**




**DT080A-12W**



**DT080A-15W**




**DT080A-N-12W**



**DT080A-N-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080A-12W	MAX 12W	36V	300mA	18°/24°/36°/50°	1080 lm	90	20	Embedded
DT080A-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1350 lm	90	20	
DT080A-N-12W	MAX 12W	36V	300mA	18°/24°/36°/50°	1080 lm	90	20	
DT080A-N-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1350 lm	90	20	

**Fixture color**





**Optical accessories**




**Chip Brand**




**DT100A**




**DT100A-15W**



**DT100A-20W**




**DT100A-N-15W**



**DT100A-N-20W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100A-15W	MAX 15W	36V	350mA	18°/24°/36°/60°	1353 lm	90	20	Embedded
DT100A-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1806 lm	90	20	
DT100A-N-15W	MAX 15W	36V	350mA	18°/24°/36°/60°	1353 lm	90	20	
DT100A-N-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1806 lm	90	20	

**Fixture color**





**Optical accessories**




**Chip Brand**





DT125A




DT125A-20W



DT125A-25W



DT125A-N-20W



DT125A-N-25W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125A-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1802 lm	90	20	Embedded
DT125A-25W	MAX 25W	36V	600mA	18°/24°/36°/60°	2256 lm	90	20	
DT125A-N-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1802 lm	90	20	
DT125A-N-25W	MAX 25W	36V	600mA	18°/24°/36°/60°	2256 lm	90	20	

Fixture color



White Black

Optical accessories



Honey Comb Spread Optics Solite Optics


Chip Brand



2700K | 3000K | 3500K | 4000K | 5000K




DT055A-S




DT055A-S-6W

Ø55\*55mm




DT055A-S-8W

Ø55\*55mm



DT055A-SN-6W

Ø60\*55mm




DT055A-SN-8W

Ø60\*55mm

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055A-S-6W	MAX 6W	36V	150mA	18°/24°/36°/60°	483 lm	90	20	Embedded
DT055A-S-8W	MAX 8W	36V	200mA	18°/24°/36°/60°	642 lm	90	20	
DT055A-SN-6W	MAX 6W	36V	150mA	18°/24°/36°/60°	483 lm	90	20	
DT055A-SN-8W	MAX 8W	36V	200mA	18°/24°/36°/60°	642 lm	90	20	

Fixture color



Optical accessories




Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

DT065A-S




DT065A-S-8W

Ø65\*65mm




DT065A-S-10W

Ø65\*65mm



DT065A-SN-8W

Ø70\*65mm




DT065A-SN-10W

Ø70\*65mm

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065A-S-8W	MAX 8W	36V	200mA	18°/24°/36°/50°	680 lm	90	20	Embedded
DT065A-S-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20	
DT065A-SN-8W	MAX 8W	36V	200mA	18°/24°/36°/50°	680 lm	90	20	
DT065A-SN-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20	

Fixture color



Optical accessories





Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT080A-S**





**DT080A-S-12W**

Ø80\*80mm




**DT080A-S-15W**

Ø80\*80mm



**DT080A-SN-12W**

Ø85\*80mm



**DT080A-SN-15W**

Ø85\*80mm

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080A-S-12W	MAX 12W	36V	300mA	18°/24°/36°/50°	1080 lm	90	20	Embedded
DT080A-S-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1350 lm	90	20	
DT080A-SN-12W	MAX 12W	36V	300mA	18°/24°/36°/50°	1080 lm	90	20	
DT080A-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1350 lm	90	20	

Fixture color




Optical accessories



Chip Brand




**DT100A-S**





**DT100A-S-15W**

Ø100\*100mm




**DT100A-S-20W**

Ø100\*100mm



**DT100A-SN-15W**

Ø105\*100mm



**DT100A-SN-20W**

Ø105\*100mm

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100A-S-15W	MAX 15W	36V	350mA	18°/24°/36°/60°	1353 lm	90	20	Embedded
DT100A-S-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1806 lm	90	20	
DT100A-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/60°	1353 lm	90	20	
DT100A-SN-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1806 lm	90	20	

Fixture color





Optical accessories




Chip Brand





**DT125A-S**




**DT125A-S-20W**



**DT125A-S-25W**



**DT125A-SN-20W**



**DT125A-SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125A-S-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1802 lm	90	20	Embedded
DT125A-S-25W	MAX 25W	36V	600mA	18°/24°/36°/60°	2256 lm	90	20	
DT125A-SN-20W	MAX 20W	36V	500mA	18°/24°/36°/60°	1802 lm	90	20	
DT125A-SN-25W	MAX 25W	36V	600mA	18°/24°/36°/60°	2256 lm	90	20	

**Fixture color**





**Optical accessories**




**Chip Brand**




**DT055A-2S**




**DT055A-2S-6W**



**DT055A-2S-8W**




**DT055A-2SN-6W**



**DT055A-2SN-8W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055A-2S-6W	MAX 2*6W	36V	150mA	18°/24°/36°/60°	2*483 lm	90	20	Embedded
DT055A-2S-8W	MAX 2*8W	36V	200mA	18°/24°/36°/60°	2*642 lm	90	20	
DT055A-2SN-6W	MAX 2*6W	36V	150mA	18°/24°/36°/60°	2*483 lm	90	20	
DT055A-2SN-8W	MAX 2*8W	36V	200mA	18°/24°/36°/60°	2*642 lm	90	20	

**Fixture color**





**Optical accessories**



**Chip Brand**




**DT065A-2S**




Ø130\*65mm

**DT065A-2S-8W**




Ø130\*65mm

**DT065A-2S-10W**



Ø135\*65mm

**DT065A-2SN-8W**



Ø135\*65mm

**DT065A-2SN-10W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065A-2S-8W	MAX 2*8W	36V	200mA	18°/24°/36°/50°	2*680 lm	90	20	Embedded
DT065A-2S-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20	
DT065A-2SN-8W	MAX 2*8W	36V	200mA	18°/24°/36°/50°	2*680 lm	90	20	
DT065A-2SN-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20	

Fixture color





Optical accessories



Chip Brand




**DT080A-2S**





Ø160\*80mm

**DT080A-2S-12W**




Ø160\*80mm

**DT080A-2S-15W**



Ø165\*80mm

**DT080A-2SN-12W**



Ø165\*80mm

**DT080A-2SN-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080A-2S-12W	MAX 2*12W	36V	300mA	18°/24°/36°/50°	2*1080 lm	90	20	Embedded
DT080A-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1350 lm	90	20	
DT080A-2SN-12W	MAX 2*12W	36V	300mA	18°/24°/36°/50°	2*1080 lm	90	20	
DT080A-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1350 lm	90	20	

Fixture color





Optical accessories




Chip Brand




**DT100A-2S**




**DT100A-2S-15W**



**DT100A-2S-20W**



**DT100A-2SN-15W**



**DT100A-2SN-20W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100A-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/60°	2*1353 lm	90	20	Embedded
DT100A-2S-20W	MAX 2*20W	36V	500mA	18°/24°/36°/60°	2*1806 lm	90	20	
DT100A-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/60°	2*1353 lm	90	20	
DT100A-2SN-20W	MAX 2*20W	36V	500mA	18°/24°/36°/60°	2*1806 lm	90	20	

Fixture color



White Black

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K



**DT125A-2S**




**DT125A-2S-20W**



**DT125A-2S-25W**



**DT125A-2SN-20W**



**DT125A-2SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125A-2S-20W	MAX 2*20W	36V	500mA	18°/24°/36°/60°	2*1802 lm	90	20	Embedded
DT125A-2S-25W	MAX 2*25W	36V	600mA	18°/24°/36°/60°	2*2256 lm	90	20	
DT125A-2SN-20W	MAX 2*20W	36V	500mA	18°/24°/36°/60°	2*1802 lm	90	20	
DT125A-2SN-25W	MAX 2*25W	36V	600mA	18°/24°/36°/60°	2*2256 lm	90	20	

Fixture color



White Black

Optical accessories




Honey Comb Spread Optics Solite Optics

Chip Brand



2700K | 3000K | 3500K | 4000K | 5000K

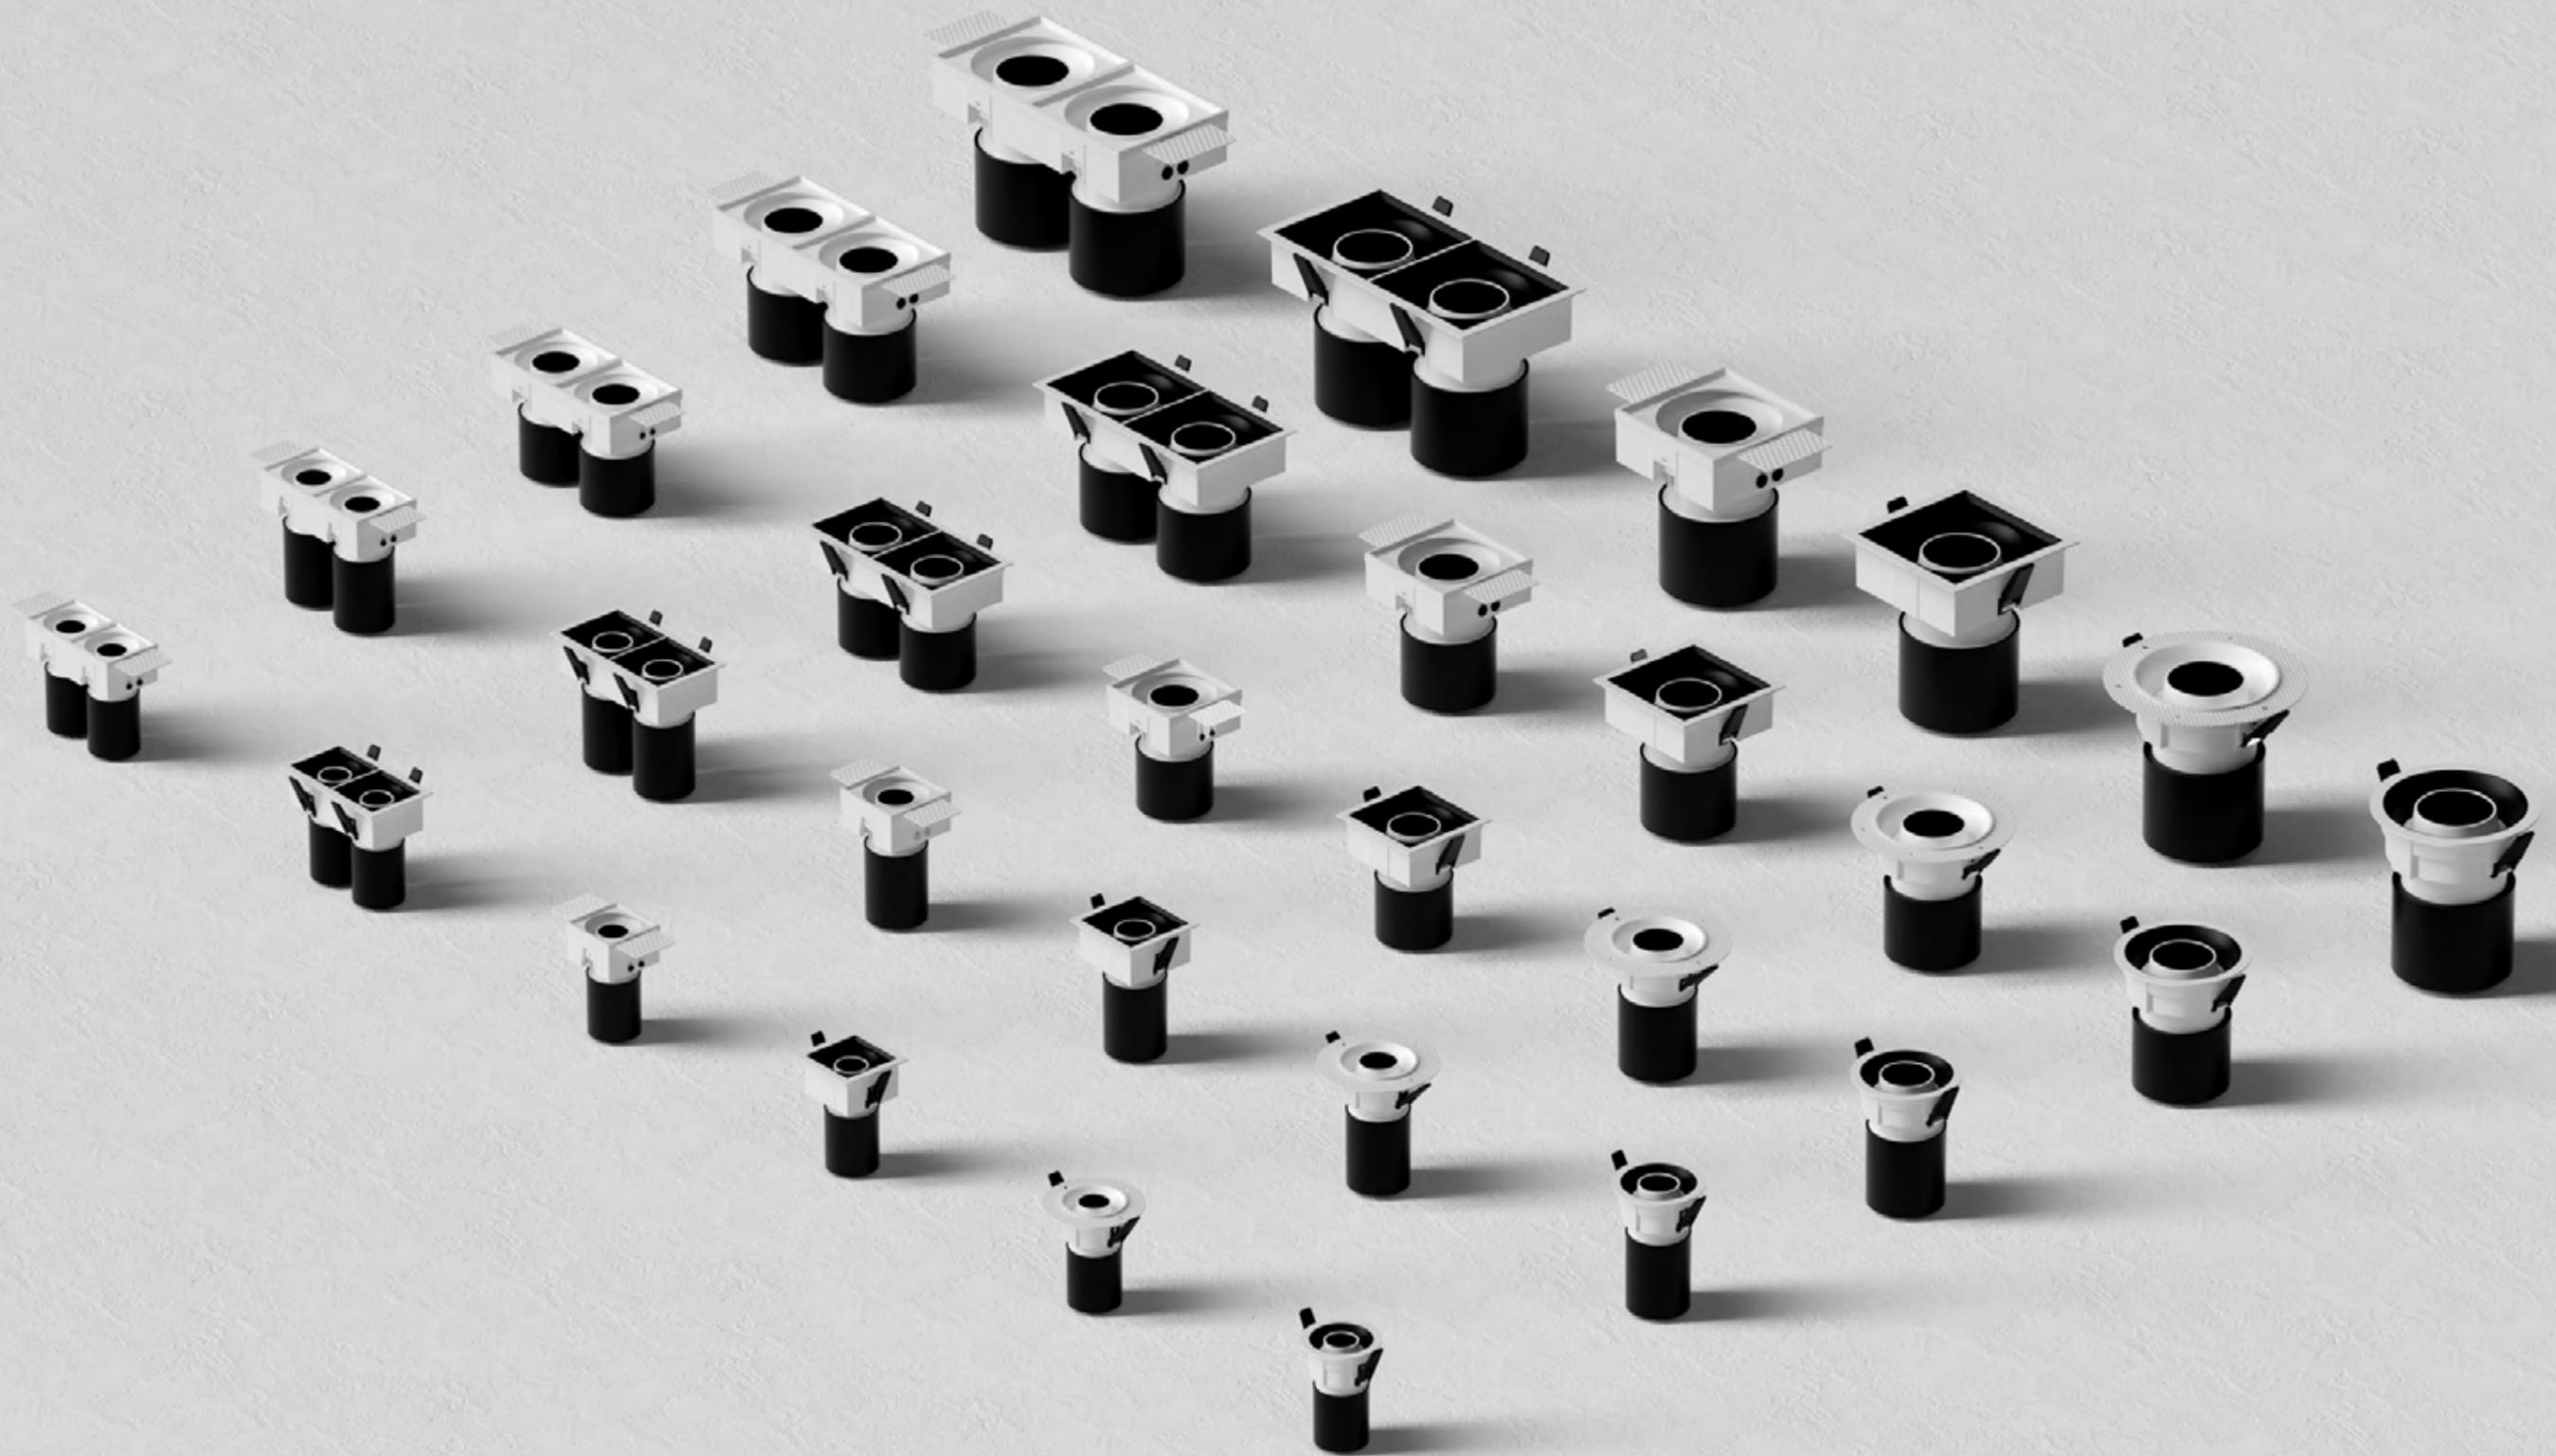

SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3



RoHS



CE



**Structural design.**

The lamp head can be adjusted left and right at an angle of 30°, and the overall module can be rotated by 355° to accurately adjust the lamp for optimal alignment. Therefore, the light is precisely directed to the desired location.



**Structural design.**

The lamp head can be adjusted left and right at an angle of 30°, and the overall module can be rotated by 355 ° to accurately adjust the lamp for optimal alignment. Therefore, the light is precisely directed to the desired location.

### Flexible assembly

We have a rich accessory system, and all accessories support manual replacement. Adjust the main color tone of the indoor space by replacing different lower reflectors. The light distribution can be changed through optical components to meet the lighting environment requirements of space. Six installation components enable better integration into different interior decoration styles.

Lamp body



Middle Ring



Optical accessories




Round Frame part



Square Frame Part






### Breakdown Drawing


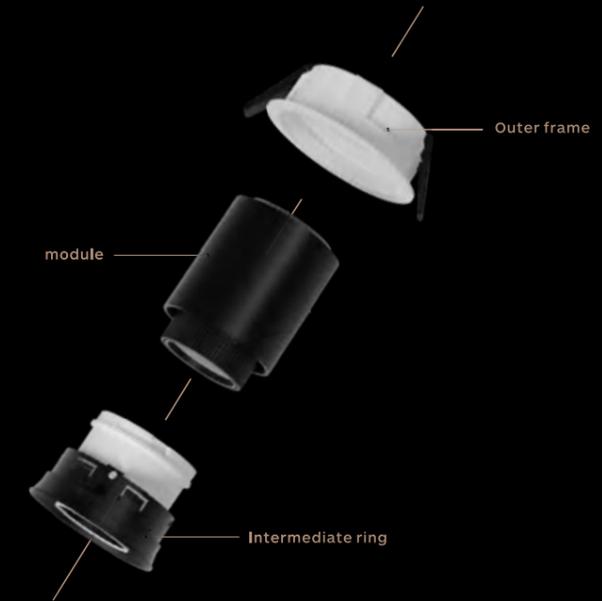


	55mm	65mm	80mm	100mm	125mm
	○ ●	○ ●	○ ●	○ ●	○ ●
Round-Trim	◎	◎	◎	◎	◎
Round-Trimless	◎	◎	◎	◎	◎
Square-Trim	□	□	□	□	□
Square-Trimless	□	□	□	□	□
Double head-Trim	◎◎	◎◎	◎◎	◎◎	◎◎
Double head-Trimless	◎◎	◎◎	◎◎	◎◎	◎◎


**DT055B**






**DT055B-8W**





**DT055B-12W**





**DT055B-15W**



**DT055B-N-8W**



**DT055B-N-12W**



**DT055B-N-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055B-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	Embedded
DT055B-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055B-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	
DT055B-N-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	
DT055B-N-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055B-N-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	

**Middle Ring**



Matt Black Matt White

**Optical accessories**




Honey Comb Spread Optics Solite Optics

**Chip Brand**




2700K | 3000K | 3500K | 4000K | 5000K


**DT065B**




**DT065B-10W**




**DT065B-15W**





**DT065B-18W**



**DT065B-N-10W**



**DT065B-N-15W**



**DT065B-N-18W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065B-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	Embedded
DT065B-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065B-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	
DT065B-N-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	
DT065B-N-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065B-N-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	

**Middle Ring**



Matt Black Matt White

**Optical accessories**





Honey Comb Spread Optics Solite Optics

**Chip Brand**




2700K | 3000K | 3500K | 4000K | 5000K


DT080B





DT080B-15W




DT080B-20W




DT080B-25W



DT080B-N-15W



DT080B-N-20W



DT080B-N-25W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080B-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	Embedded
DT080B-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080B-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	
DT080B-N-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	
DT080B-N-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080B-N-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories



Honey Comb Spread Optics Solite Optics




Chip Brand





2700K | 3000K | 3500K | 4000K | 5000K






**DT100B**





**DT100B-25W**



**DT100B-35W**



**DT100B-N-25W**



**DT100B-N-35W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100B-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	Embedded
DT100B-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	
DT100B-N-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	
DT100B-N-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	

**Middle Ring**



Matt Black Matt White

**Optical accessories**






Honey Comb Spread Optics Solite Optics

**Chip Brand**





2700K | 3000K | 3500K | 4000K | 5000K



**DT125B**





**DT125B-35W**



**DT125B-40W**



**DT125B-N-35W**



**DT125B-N-40W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125B-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	Embedded
DT125B-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	
DT125B-N-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	
DT125B-N-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	

**Middle Ring**



Matt Black Matt White

**Optical accessories**





Honey Comb Spread Optics Solite Optics

**Chip Brand**




2700K | 3000K | 3500K | 4000K | 5000K

**DT055B-S**




Ø55\*55mm

**DT055B-S-8W**





Ø55\*55mm

**DT055B-S-12W**




Ø55\*55mm

**DT055B-S-15W**




Ø60\*55mm

**DT055B-SN-8W**



Ø60\*55mm

**DT055B-SN-12W**



Ø60\*55mm

**DT055B-SN-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055B-S-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	Embedded
DT055B-S-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055B-S-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	
DT055B-SN-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	
DT055B-SN-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055B-SN-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT065B-S**




Ø65\*65mm

**DT065B-S-10W**




Ø65\*65mm

**DT065B-S-15W**




Ø65\*65mm

**DT065B-S-18W**




Ø70\*65mm

**DT065B-SN-10W**



Ø70\*65mm

**DT065B-SN-15W**



Ø70\*65mm

**DT065B-SN-18W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065B-S-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	Embedded
DT065B-S-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065B-S-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	
DT065B-SN-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	
DT065B-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065B-SN-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT080B-S**




Ø80\*80mm

**DT080B-S-15W**





Ø80\*80mm

**DT080B-S-20W**




Ø80\*80mm

**DT080B-S-25W**




Ø85\*80mm

**DT080B-SN-15W**



Ø85\*80mm

**DT080B-SN-20W**



Ø85\*80mm

**DT080B-SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080B-S-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	Embedded
DT080B-S-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080B-S-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	
DT080B-SN-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	
DT080B-SN-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080B-SN-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories




Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT100B-S**




Ø100\*100mm

**DT100B-S-25W**




Ø100\*100mm

**DT100B-S-35W**



Ø105\*100mm

**DT100B-SN-25W**



Ø105\*100mm

**DT100B-SN-35W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100B-S-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	Embedded
DT100B-S-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	
DT100B-SN-25W	MAX 25W	36V	600mA	20°/30°/40°/50°	2253 lm	90	20	
DT100B-SN-35W	MAX 35W	36V	800mA	20°/30°/40°/50°	3146 lm	90	20	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

DT125B-S





Ø125\*125mm

DT125B-S-35W




Ø125\*125mm

DT125B-S-40W



Ø130\*125mm

DT125B-SN-35W



Ø130\*125mm

DT125B-SN-40W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125B-S-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	Embedded
DT125B-S-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	
DT125B-SN-35W	MAX 35W	36V	800mA	18°/24°/36°/50°	3152 lm	90	20	
DT125B-SN-40W	MAX 40W	36V	1000mA	18°/24°/36°/50°	3594 lm	90	20	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

DT055B-2S




Ø110\*55mm

DT055B-2S-8W





Ø110\*55mm

DT055B-2S-12W




Ø110\*55mm

DT055B-2S-15W




Ø115\*55mm

DT055B-2SN-8W



Ø115\*55mm

DT055B-2SN-12W



Ø115\*55mm

DT055B-2SN-15W

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055B-2S-8W	MAX 2*8W	36V	200mA	20°/30°/40°/50°	2*641 lm	90	20/44	Embedded
DT055B-2S-12W	MAX 2*12W	36V	300mA	20°/30°/40°/50°	2*963 lm	90	20/44	
DT055B-2S-15W	MAX 2*15W	36V	350mA	20°/30°/40°/50°	2*1196 lm	90	20/44	
DT055B-2SN-8W	MAX 2*8W	36V	200mA	20°/30°/40°/50°	2*641 lm	90	20/44	
DT055B-2SN-12W	MAX 2*12W	36V	300mA	20°/30°/40°/50°	2*963 lm	90	20/44	
DT055B-2SN-15W	MAX 2*15W	36V	350mA	20°/30°/40°/50°	2*1196 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT065B-2S**




Ø130\*65mm

**DT065B-2S-10W**





Ø130\*65mm

**DT065B-2S-15W**




Ø130\*65mm

**DT065B-2S-18W**




Ø135\*65mm

**DT065B-2SN-10W**



Ø135\*65mm

**DT065B-2SN-15W**



Ø135\*65mm

**DT065B-2SN-18W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT065B-2S-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20/44	Embedded
DT065B-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1017 lm	90	20/44	
DT065B-2S-18W	MAX 2*18W	36V	400mA	18°/24°/36°/50°	2*1369 lm	90	20/44	
DT065B-2SN-10W	MAX 2*10W	36V	250mA	18°/24°/36°/50°	2*852 lm	90	20/44	
DT065B-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1017 lm	90	20/44	
DT065B-2SN-18W	MAX 2*18W	36V	400mA	18°/24°/36°/50°	2*1369 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories




Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT080B-2S**




Ø160\*80mm

**DT080B-2S-15W**




Ø160\*80mm

**DT080B-2S-20W**




Ø160\*80mm

**DT080B-2S-25W**




Ø165\*80mm

**DT080B-2SN-15W**



Ø165\*80mm

**DT080B-2SN-20W**



Ø165\*80mm

**DT080B-2SN-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080B-2S-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1351 lm	90	20/44	Embedded
DT080B-2S-20W	MAX 2*20W	36V	500mA	18°/24°/36°/50°	2*1812 lm	90	20/44	
DT080B-2S-25W	MAX 2*25W	36V	600mA	18°/24°/36°/50°	2*2256 lm	90	20/44	
DT080B-2SN-15W	MAX 2*15W	36V	350mA	18°/24°/36°/50°	2*1351 lm	90	20/44	
DT080B-2SN-20W	MAX 2*20W	36V	500mA	18°/24°/36°/50°	2*1812 lm	90	20/44	
DT080B-2SN-25W	MAX 2*25W	36V	600mA	18°/24°/36°/50°	2*2256 lm	90	20/44	

Middle Ring



Matt Black Matt White

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT100B-2S**





Ø200\*100mm

**DT100B-2S-25W**




Ø200\*100mm

**DT100B-2S-35W**



Ø205\*100mm

**DT100B-2SN-25W**



Ø205\*100mm

**DT100B-2SN-35W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT100B-2S-25W	MAX 2*25W	36V	600mA	20°/30°/40°/50°	2*2253 lm	90	20	Embedded
DT100B-2S-35W	MAX 2*35W	36V	800mA	20°/30°/40°/50°	2*3146 lm	90	20	
DT100B-2SN-25W	MAX 2*25W	36V	600mA	20°/30°/40°/50°	2*2253 lm	90	20	
DT100B-2SN-35W	MAX 2*35W	36V	800mA	20°/30°/40°/50°	2*3146 lm	90	20	

Middle Ring



Matt Black Matt White

Optical accessories




Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DT125B-2S**




Ø250\*125mm

**DT125B-2S-35W**




Ø250\*125mm

**DT125B-2S-40W**



Ø255\*125mm

**DT125B-2SN-35W**



Ø255\*125mm

**DT125B-2SN-40W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT125B-2S-35W	MAX 2*35W	36V	800mA	18°/24°/36°/50°	2*3152 lm	90	20	Embedded
DT125B-2S-40W	MAX 2*40W	36V	1000mA	18°/24°/36°/50°	2*3594 lm	90	20	
DT125B-2SN-35W	MAX 2*35W	36V	800mA	18°/24°/36°/50°	2*3152 lm	90	20	
DT125B-2SN-40W	MAX 2*40W	36V	1000mA	18°/24°/36°/50°	2*3594 lm	90	20	

Middle Ring



Matt Black Matt White

Optical accessories



Honey Comb Spread Optics Solite Optics

Chip Brand



2700K | 3000K | 3500K | 4000K | 5000K



Ø55mm



Ø65mm



Ø80mm





Nickel



Matte Brass



Black



White



Chrome



Matte Bronze



Matte Silver



LAMP BODY

# SEVEN COLOR CHOICES



SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3





RoHS




CE

**DT065H**




Ø55-58mm

**DT055H-8W**





Ø55-58mm

**DT055H-12W**




Ø55-58mm

**DT055H-15W**




Ø65-68mm

**DT065H-10W**



Ø65-68mm

**DT065H-15W**



Ø65-68mm

**DT065H-18W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055H-8W	MAX 8W	36V	200mA	20°/30°/40°/50°	641 lm	90	20/44	Embedded
DT055H-12W	MAX 12W	36V	300mA	20°/30°/40°/50°	963 lm	90	20/44	
DT055H-15W	MAX 15W	36V	350mA	20°/30°/40°/50°	1196 lm	90	20/44	
DT065H-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20/44	
DT065H-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1017 lm	90	20/44	
DT065H-18W	MAX 18W	36V	400mA	18°/24°/36°/50°	1369 lm	90	20/44	

**Reflector**



**Optical accessories**





**Chip Brand**




2700K | 3000K | 3500K | 4000K | 5000K

**DT080H**




Ø80mm

**DT080H-15W**



Ø80mm

**DT080H-20W**



Ø80mm

**DT080H-25W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT080H-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1351 lm	90	20/44	Embedded
DT080H-20W	MAX 20W	36V	500mA	18°/24°/36°/50°	1812 lm	90	20/44	
DT080H-25W	MAX 25W	36V	600mA	18°/24°/36°/50°	2256 lm	90	20/44	

**Reflector**



**Optical accessories**



**Chip Brand**



2700K | 3000K | 3500K | 4000K | 5000K



Nickel



Matt Brass



Black



White



Chrome



Matt Bronze



Matt Silver

LAMP BODY

# SEVEN COLOR CHOICES



SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3



RoHS



CE



**UGR<6**



SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3



RoHS




CE



## PIN HOLE LAMP DESIGN

/adjustable angle

Ultra thin height design, compatible  
with adjustment function



SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3



RoHS



CE

**SMALL CIRCULAR HOLE**

/Non adjustable angle




**UGR<6**



---

- ➔ Mini hole with large light spot,
- ➔ 24°/36°/50° are optional
- ➔ Deep anti-glare design with UGR<6
- ➔ Crossed light output with high efficiency





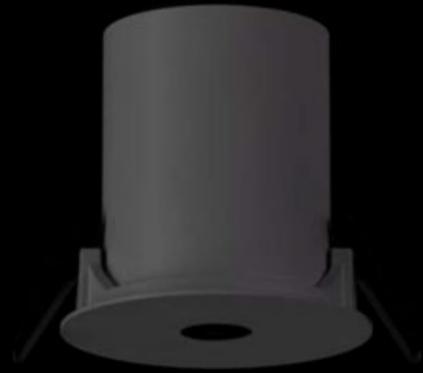



**DT-Q-A**



**DT055Q-A**



**DT065Q-A**




**DT080Q-A**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055Q-A	MAX 10W	36V	250mA	24°/36°	552 lm	90	20	Embedded
DT065Q-A	MAX 15W	36V	350mA	24°/36°/50°	825 lm	90	20	
DT080Q-A	MAX 18W	36V	400mA	24°/36°/50°	996 lm	90	20	


Chip Brand




DT-Q



Ø55-58mm  
DT055Q



Ø65-68mm  
DT065Q




Ø80mm  
DT080Q

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055Q	MAX 10W	36V	250mA	24°/36°	552 lm	90	20	Embedded
DT065Q	MAX 15W	36V	300mA	24°/36°/50°	825 lm	90	20	
DT080Q	MAX 18W	36V	400mA	24°/36°/50°	996 lm	90	20	


Chip Brand




DT-Q-N



Ø55mm  
DT055Q-N



Ø65mm  
DT065Q-N




Ø80mm  
DT080Q-N

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DT055Q-N	MAX 10W	36V	250mA	24°/36°	552 lm	90	20	Embedded
DT065Q-N	MAX 15W	36V	300mA	24°/36°/50°	825 lm	90	20	
DT080Q-N	MAX 18W	36V	400mA	24°/36°/50°	996 lm	90	20	

Chip Brand







SCR Dimming



Bluetooth Dimming



Tuya Dimming



0-10V Dimming



DALI Dimming



High-power LEDSDCM<3



RoHS



CE





Metal plate for both ceiling mounted and hanging option




Suspension





Ceiling mounted



DTM065B



DTM080B



DTM100B

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM065B	MAX 6W	36V	150mA	15°/24°/36°/60°	688 lm	90	20	Surface mounted
DTM080B	MAX 10W	36V	250mA	18°/24°/36°/60°	903 lm	90	20	
DTM100B	MAX 15W	36V	350mA	18°/24°/36°/60°	1356 lm	90	20	

## Middle Ring



Matt Black Matt White

## Optical accessories





Honey Comb Spread Optics Solite Optics



## Chip Brand



2700K | 3000K | 3500K | 4000K | 5000K



DTM125B



DTM125B-H

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM125B	MAX 20W	36V	500mA	18°/24°/36°/60°	1821 lm	90	20	Surface mounted
DTM125B-H	MAX 25W	36V	600mA	18°/24°/36°/60°	2264 lm	90	20	

## Middle Ring



Matt Black Matt White

## Optical accessories




Honey Comb Spread Optics Solite Optics

## Chip Brand



2700K | 3000K | 3500K | 4000K | 5000K



### Structural design.

The lamp head can be adjusted left and right at an angle of 50°, and the overall module can be rotated by 355° to accurately adjust the lamp for optimal alignment. Therefore, the light is precisely directed to the desired location.



SCR  
Dimming



Bluetooth  
Dimming



Tuya  
Dimming



0-10V  
Dimming



DALI Dimming



High-power  
LEDSDCM<3





RoHS




CE

**DTM055A**



**DTM055A-6W**



**DTM055A-8W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM055A-6W	MAX 6W	36V	150mA	18°/24°/36°/60°	483 lm	90	20	Surface mounted
DTM055A-8W	MAX 8W	36V	200mA	18°/24°/36°/60°	642 lm	90	20	

Optical accessories




Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DTM065A**



**DTM065A-8W**



**DTM065A-10W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM065A-8W	MAX 8W	36V	200mA	18°/24°/36°/50°	680 lm	90	20	Surface mounted
DTM065A-10W	MAX 10W	36V	250mA	18°/24°/36°/50°	852 lm	90	20	

Optical accessories





Honey Comb Spread Optics Solite Optics

Chip Brand




2700K | 3000K | 3500K | 4000K | 5000K

**DTM080A**



**DTM080A-12W**




**DTM080A-15W**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM080A-12W	MAX 12W	36V	300mA	18°/24°/36°/50°	1080 lm	90	20	Surface mounted
DTM080A-15W	MAX 15W	36V	350mA	18°/24°/36°/50°	1350 lm	90	20	

**Optical accessories**



**Chip Brand**

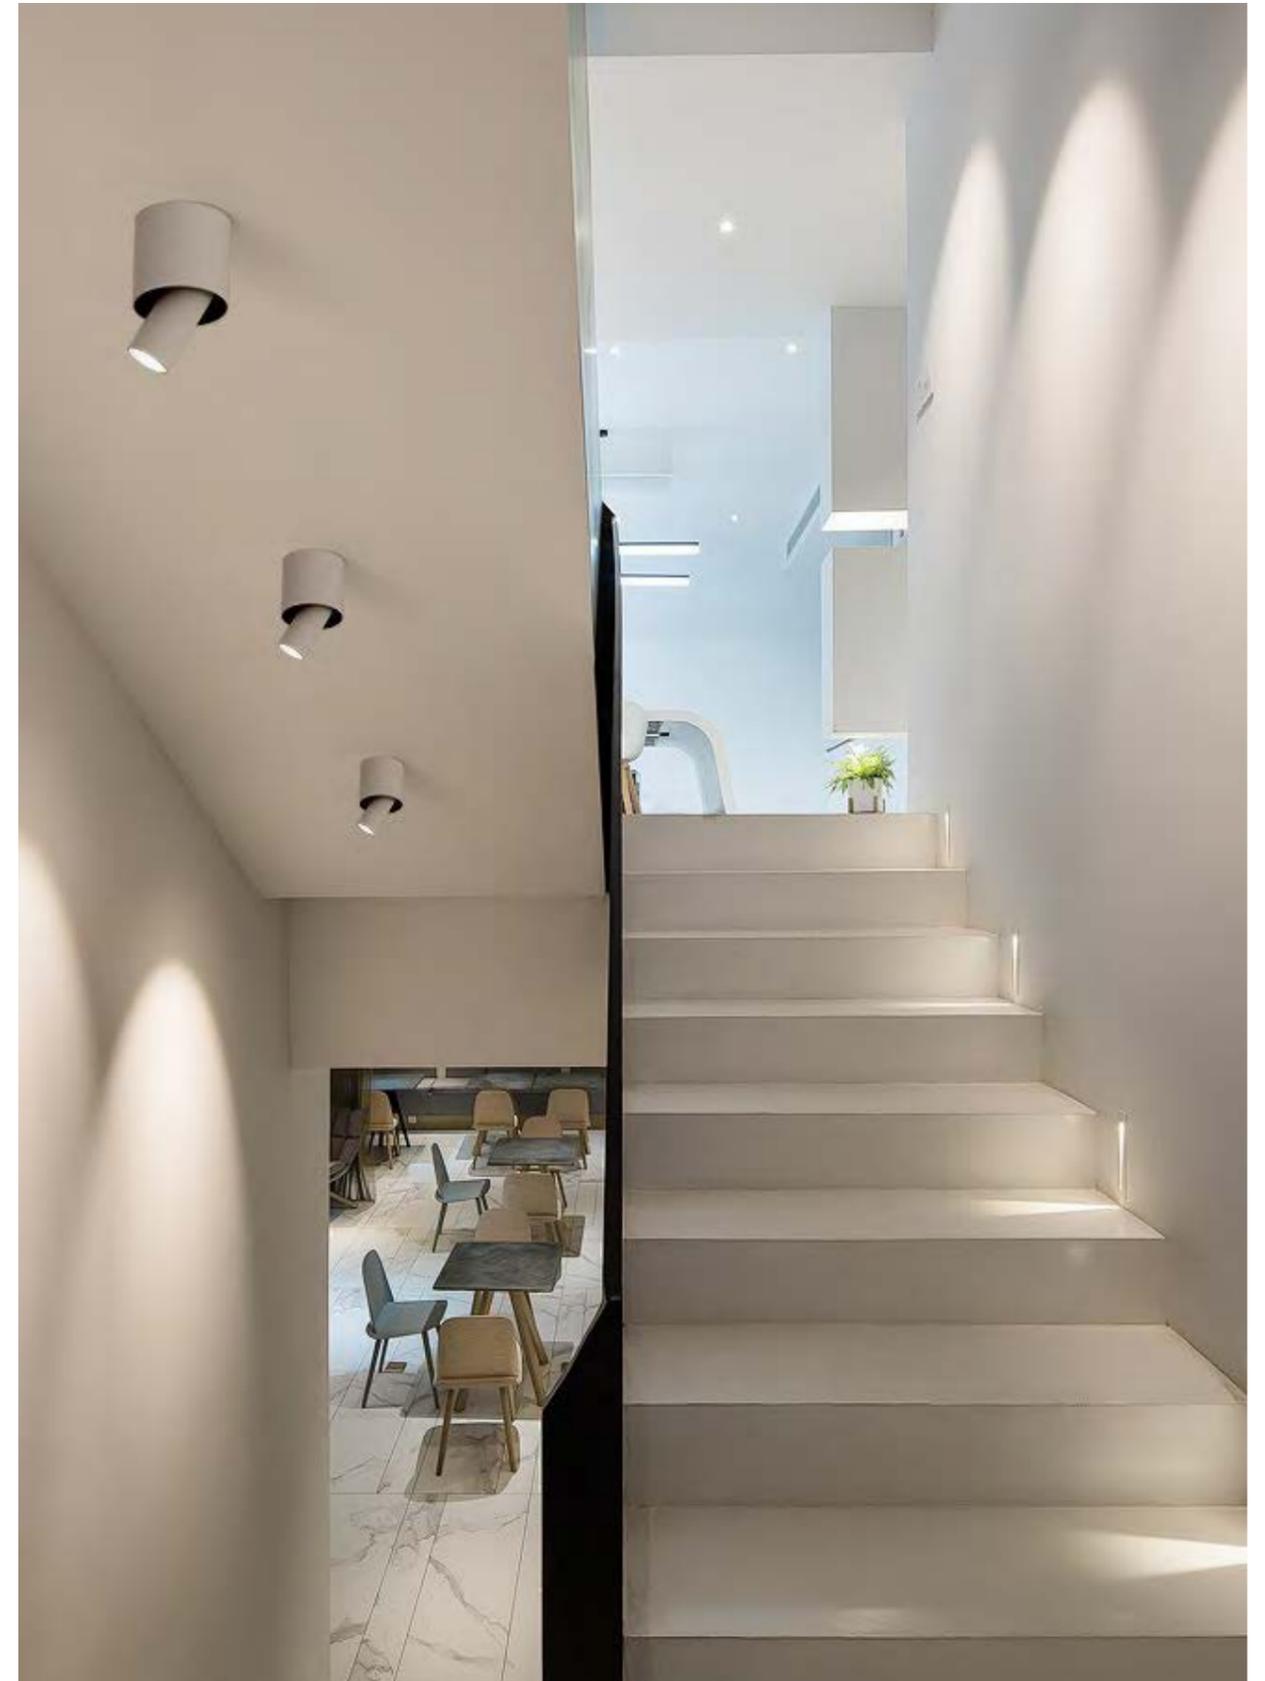





**UGR<6**  
Pin hole with  
large light spot



**DTM-Q**



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DTM055Q	MAX 6W	36V	150mA	24°/36°	332 lm	90	20	Surface mounted
DTM065Q	MAX 10W	36V	250mA	24°/36°	554 lm	90	20	
DTM080Q	MAX 15W	36V	350mA	24°/36°	825 lm	90	20	

Chip Brand  

 PHILIPS LUMINUS CITIZEN CREE bridgelux  
 2700K | 3000K | 3500K | 4000K | 5000K