



IP65

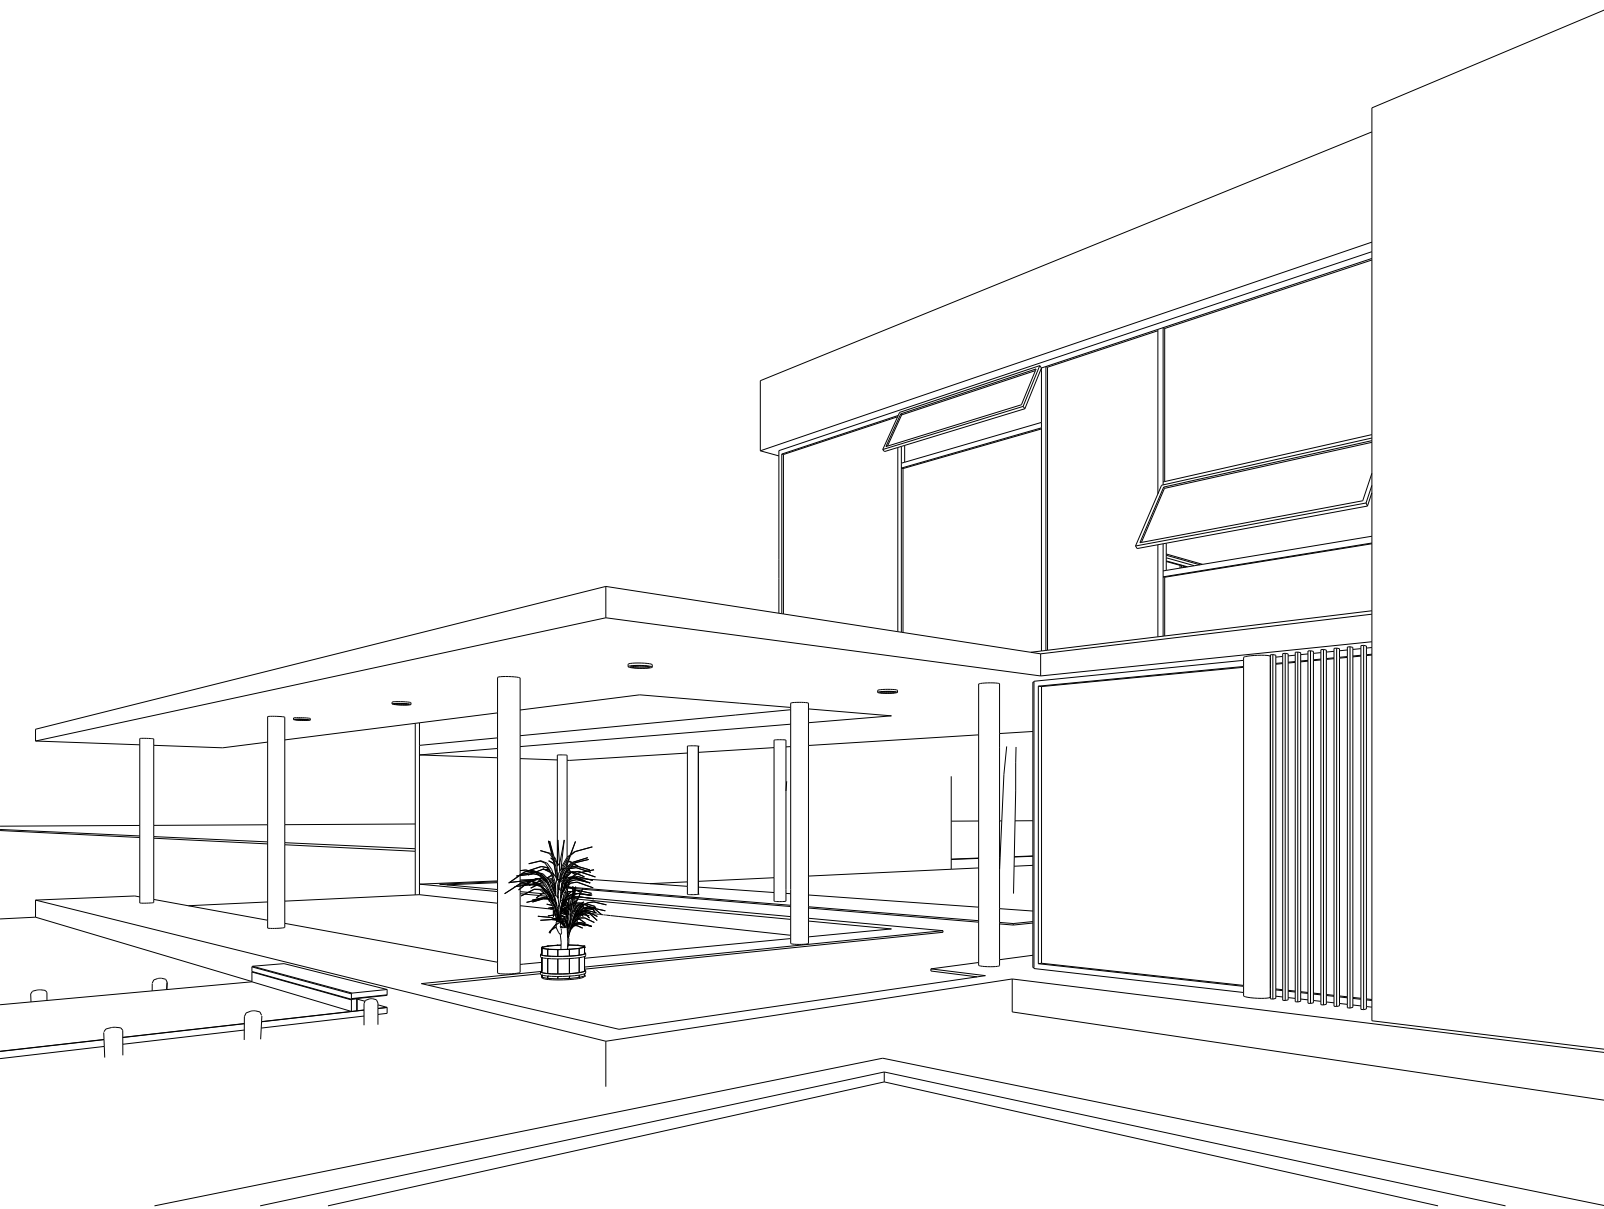

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming





High-power LED
SDGM<3




CRI > 90




Anti-Glare

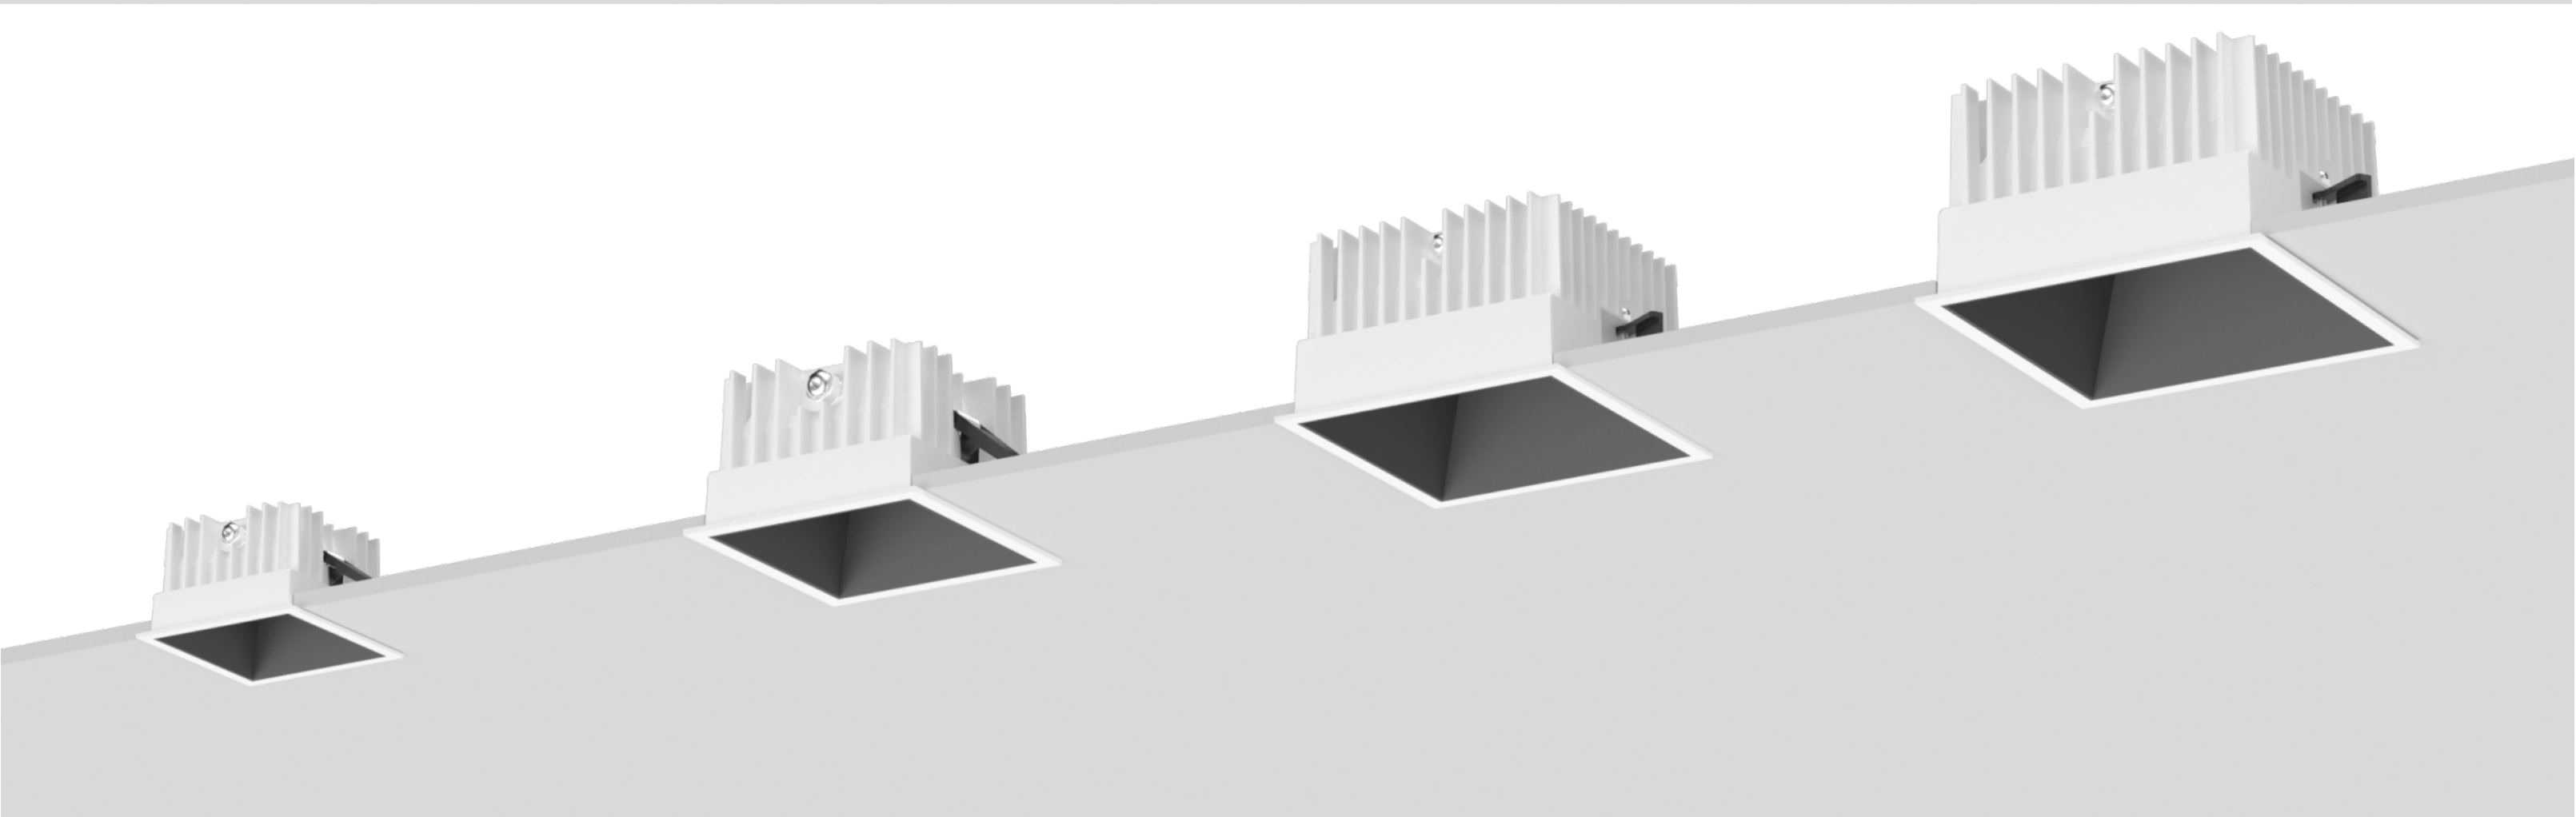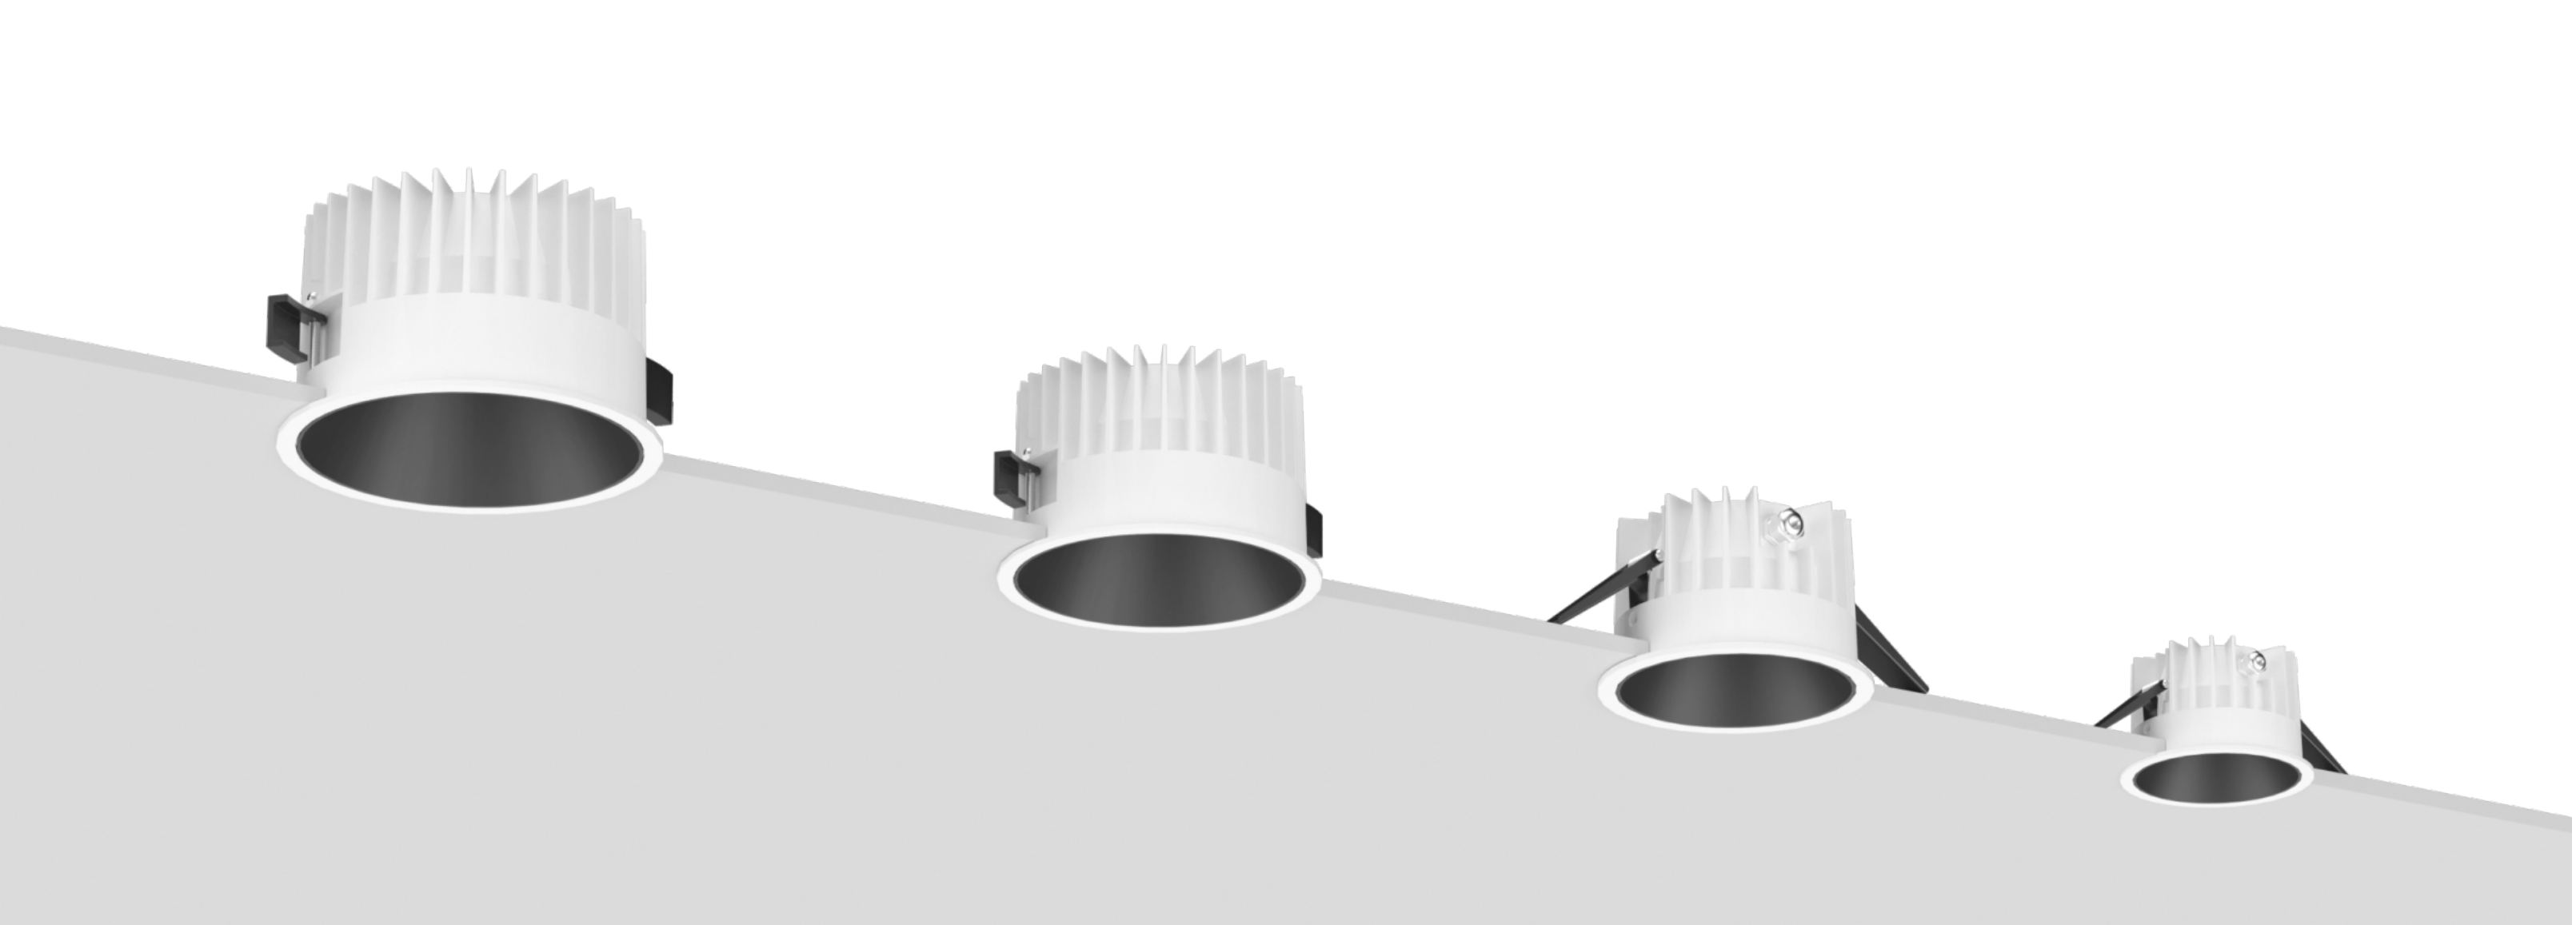


DN



DN001S




DN001




DN002

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DN001S	MAX 6W	36V	150mA	15°/24°/36°/60°	396 lm	90	65	Embedded
DN001	MAX 15W	36V	350mA	15°/24°/36°/60°	1061 lm	90	65	
DN002	MAX 18W	36V	450mA	15°/24°/36°/60°	1359 lm	90	65	


Reflector




DN



DN003




DN004




DN005

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DN003	MAX 25W	36V	600mA	15°/24°/36°/60°	1885 lm	90	65	Embedded
DN004	MAX 35W	36V	800mA	15°/24°/36°/60°	2634 lm	90	65	
DN005	MAX 45W	36V	1050mA	15°/24°/36°/60°	3637 lm	90	65	



Reflector



DN



DN002S



DN003S

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DN002S	MAX 18W	36V	450mA	15°/24°/36°/60°	1361 lm	90	65	Embedded
DN003S	MAX 25W	36V	600mA	15°/24°/36°/60°	1886 lm	90	65	

Reflector






Matt White Matt Black Matt Silver Matt Gold





2700K | 3000K | 3500K | 4000K | 5000K

DN



DN004S



DN005S

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
DN004S	MAX 35W	36V	800mA	15°/24°/36°/60°	2633 lm	90	65	Embedded
DN005S	MAX 45W	36V	1050mA	15°/24°/36°/60°	3637 lm	90	65	

Reflector



Matt White Matt Black Matt Silver Matt Gold



2700K | 3000K | 3500K | 4000K | 5000K

