




Track light



220V



Embedded



Surface mounted



48V



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming




High-power
LEDSDCM<3



RoHS



CE



White

Black

Chrome


Matt Bronze

Grey


Matt Silver




TA



TA001



TA002



TA003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TA001	MAX 6W	36V	150mA	15°/24°/36°/50°	483 lm	90	20	Track Mounted
TA002	MAX 15W	36V	350mA	10°/15°/24°/36°/50°	1218 lm	90	20	
TA003	MAX 25W	36V	600mA	10°/15°/24°/36°/50°	2037 lm	90	20	

Optical accessories



Honey Comb




Spread Optics



Solite Optics



2700K | 3000K | 3500K | 4000K | 5000K






D.A.O COFFEE


D.A.O COFFEE

招牌咖啡	45	梅桂糖	50	燕麦系列
奶太拿铁	45	森可可	40	奶的糖霜
蜜上花升	45	果丁丁	40	多肉茶冻
椰果派对	50	抹茶拿铁	38	鲜榨果汁
奶昔系列	40	焙香巧克力	40	清茶冰沙









LENS



EMITTER



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming




High-power
LEDSDCM<3






RoHS





CE





TM



TM001A



TM002A



TM003A

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TM001A	MAX 20W	36V	500mA	15°/24°/36°/60°	1821 lm	90	20	Track Mounted
TM002A	MAX 30W	36V	700mA	15°/24°/36°/60°	2733 lm	90	20	
TM003A	MAX 40W	36V	1000mA	15°/24°/36°/60°	3594 lm	90	20	

Optical accessories



Honey Comb



Spread Optics



Solite Optics



2700K | 3000K | 3500K | 4000K | 5000K



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming




High-power
LEDSDCM<3



RoHS



CE



LENS



EMITTER



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming





High-power
LEDSDCM<3




RoHS



CE





TD003




TD004

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TD003	MAX 20W	36V	500mA	15°/24°/38°/45°/60°	1913 lm	90	20	Track Mounted
TD004	MAX 30W	36V	700mA	15°/24°/38°/45°/60°	2855 lm	90	20	

Optical accessories




TD005





TD006

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TD005	MAX 35W	36V	800mA	15°/24°/38°/45°/60°	3226 lm	90	20	Track Mounted
TD006	MAX 40W	36V	1000mA	15°/24°/38°/45°/60°	3837 lm	90	20	

Optical accessories






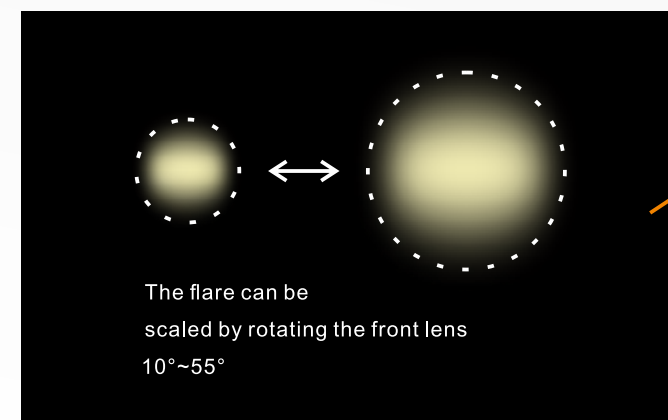



- | | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| SCR Dimming | Bluetooth Dimming | Tuya Dimming | 0-10V Dimming | DALI Dimming | High-power LEDSDCM<3 | RoHS | CE |

TF



TF001-A




TF002-A

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TF001-A	MAX 18W	36V	450mA	15°~50°	1451 lm	90	20	Track Mounted
TF002-A	MAX 25W	36V	600mA	15°~50°	2012 lm	90	20	




2700K | 3000K | 3500K | 4000K | 5000K

TF



TF003-A



TF004-A

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TF003-A	MAX 35W	36V	800mA	15°~50°	2822 lm	90	20	Track Mounted
TF004-A	MAX 40W	36V	1000mA	15°~50°	3218 lm	90	20	




2700K | 3000K | 3500K | 4000K | 5000K









TH



TH001



TH001Q

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TH001	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Track Mounted
TH001Q	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Embedded

Optical accessories



Honey Comb



Spread Optics




Solite Optics



2700K | 3000K | 3500K | 4000K | 5000K





SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming



High-power
LEDSDCM<3




RoHS



CE



T9




T9004

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
T9004	MAX 35W	36V	800mA	24°	3152 lm	90	20	Track Mounted




OSRAM
2700K | 3000K | 3500K | 4000K | 5000K






TC



TC001






TC002

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TC001	MAX 12W	15V	700mA	24°/36°	1028 lm	90	20	Track Mounted
TC002	MAX 20W	30V	600mA	24°/36°	1721 lm	90	20	




OSRAM
2700K | 3000K | 3500K | 4000K | 5000K

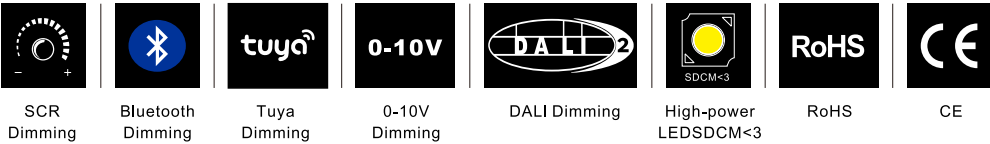




15°



24°



36°



50°



50°x50°



70°x70°



35°x75°



90°x90°



polarized



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming





High-power
LEDSDCM<3




RoHS



CE

**TC003**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TC003	MAX 25W	36V	600mA	15°/24°/36°50°/50°*50°/ 70°*70°/35°*75°/90°*90°/ polarized	2133 lm	90	20	Track Mounted



OSRAM *bridgelux*
2700K | 3000K | 3500K | 4000K | 5000K

