



MAGNETIC



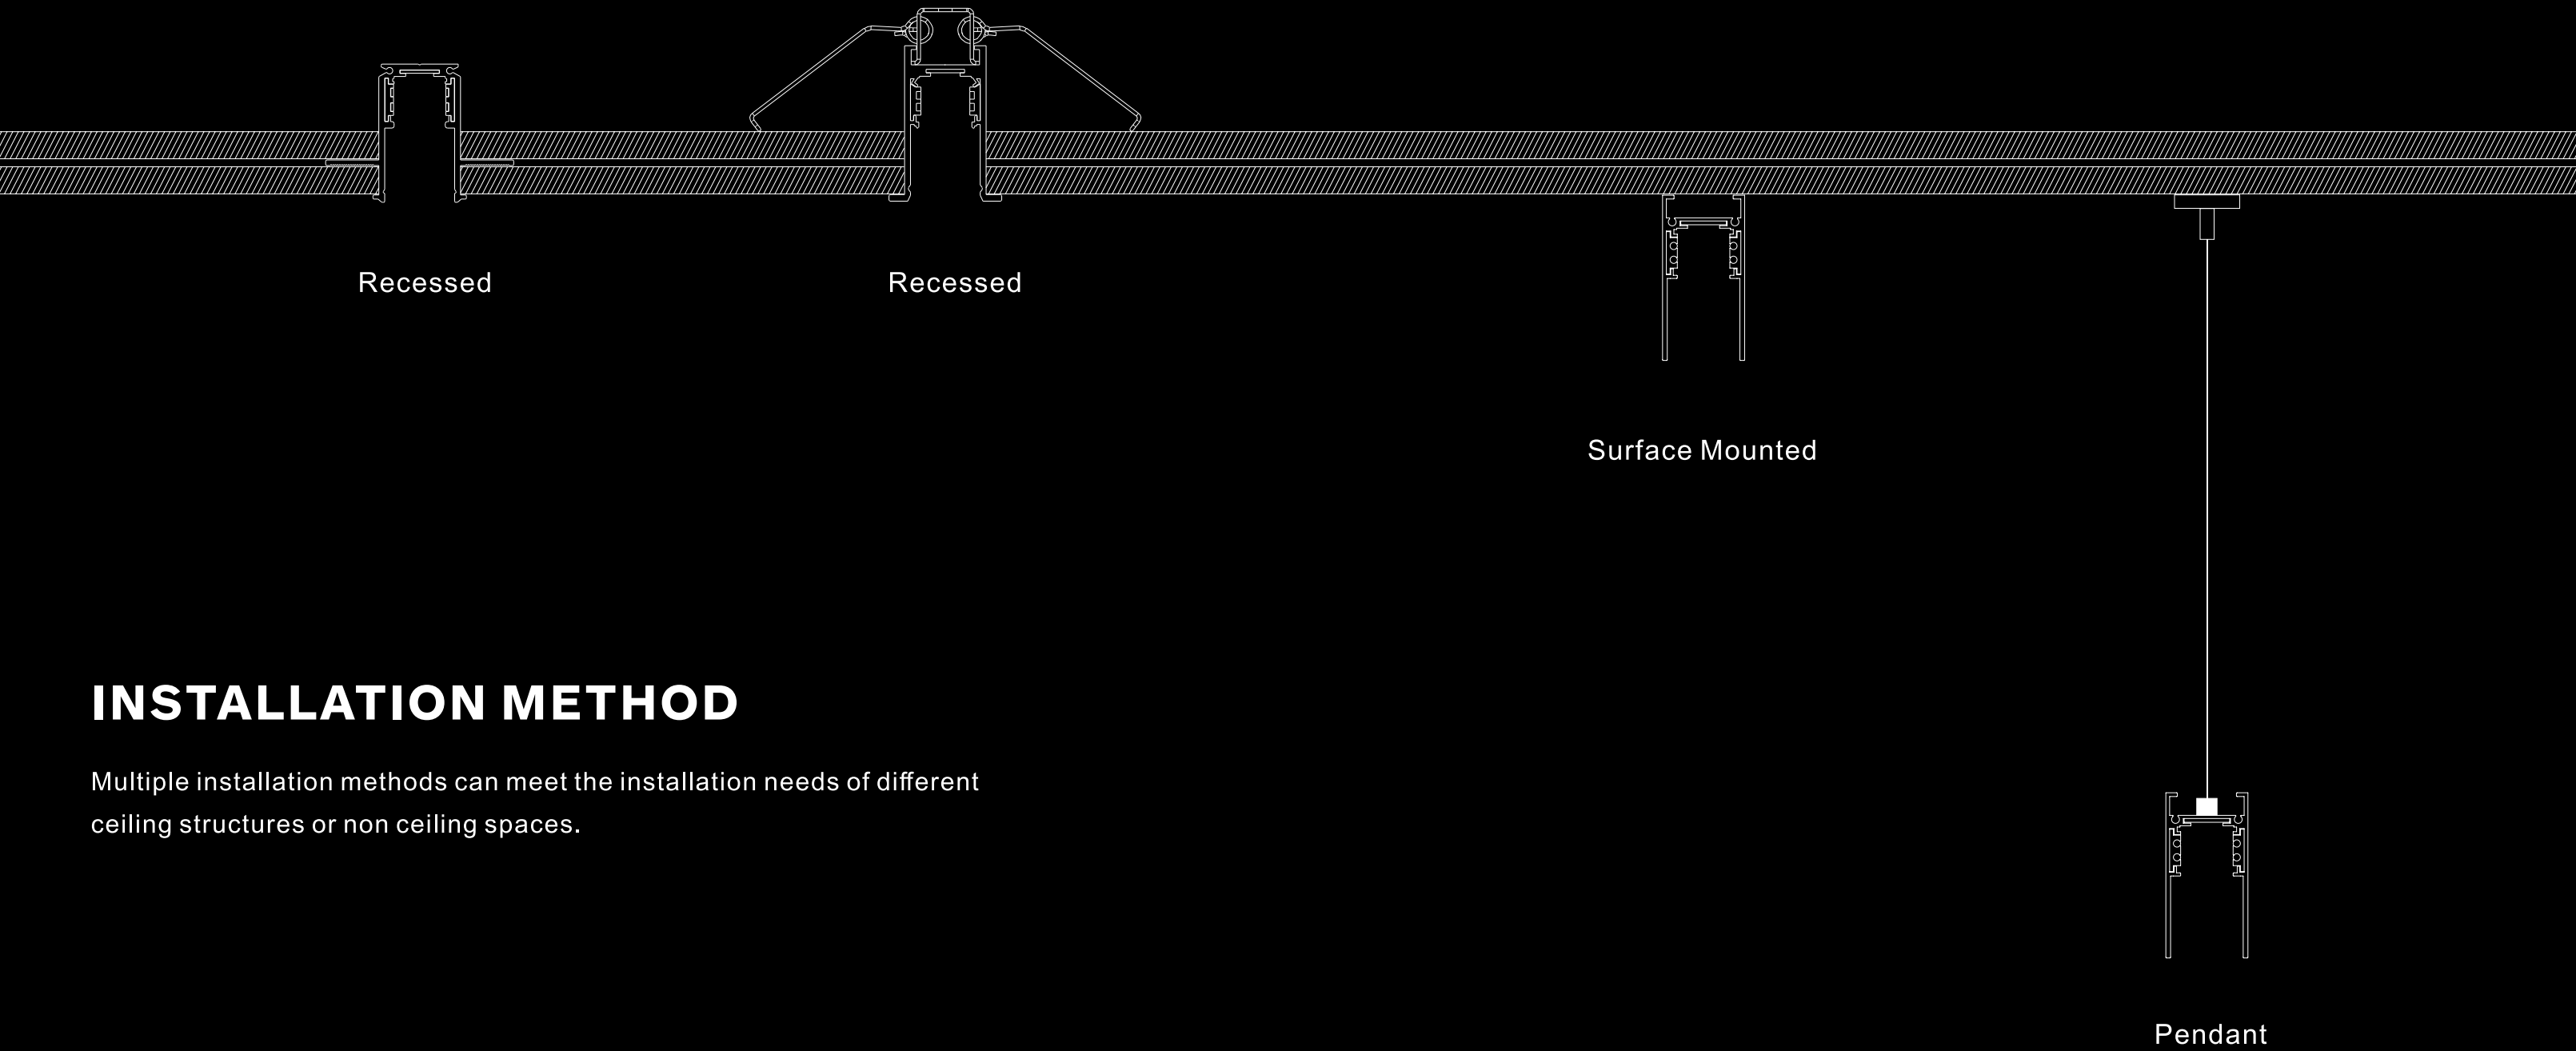


INSTALLATION METHOD


Multiple installation methods can meet the installation needs of different ceiling structures or non ceiling spaces.

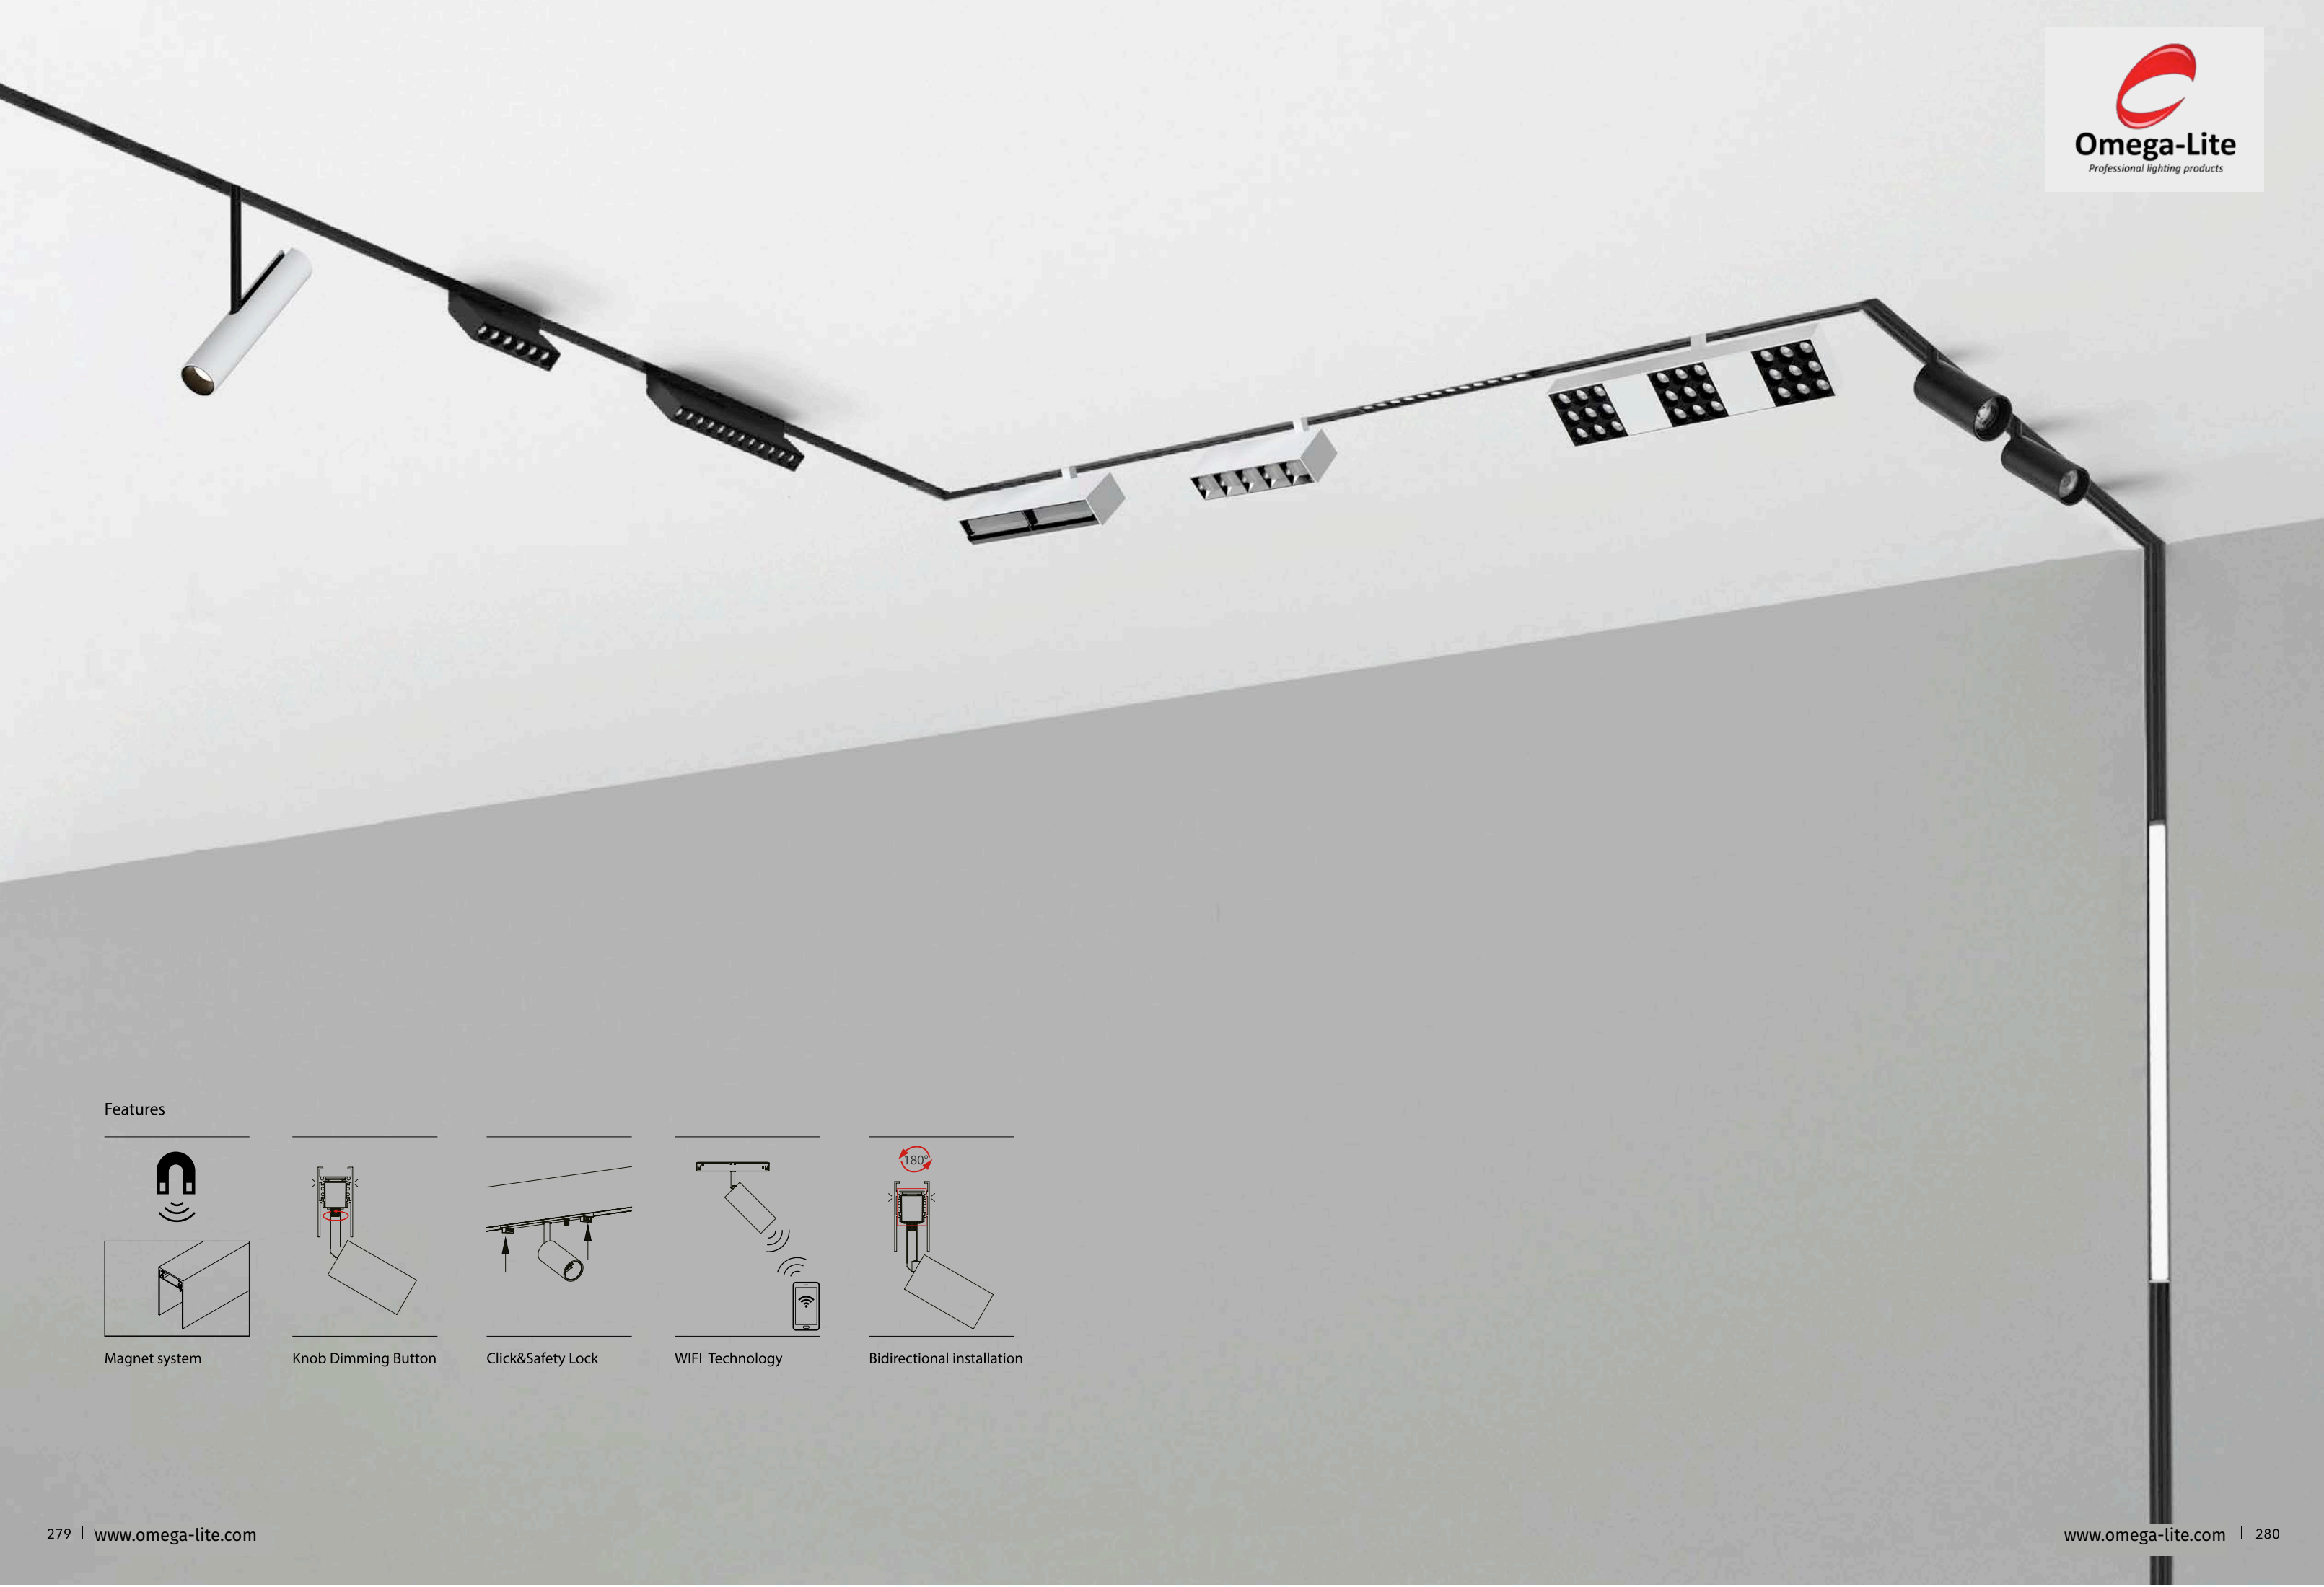


Features




Magnet system




Knob Dimming Button



Click&Safety Lock




WIFI Technology




Bidirectional installation


Track Accessories

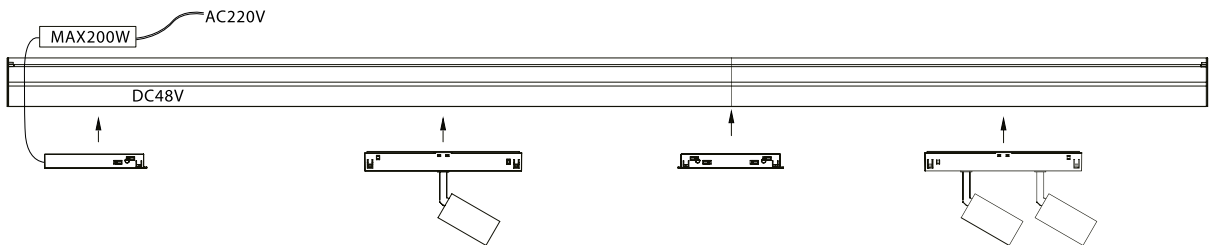


Driver Installation

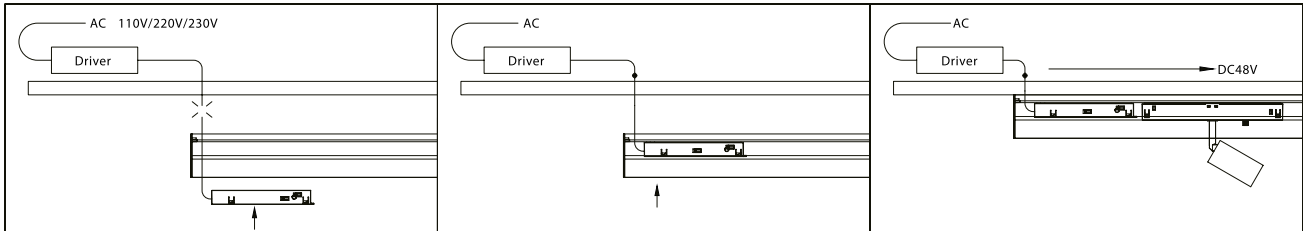


Transformer Installation Methods

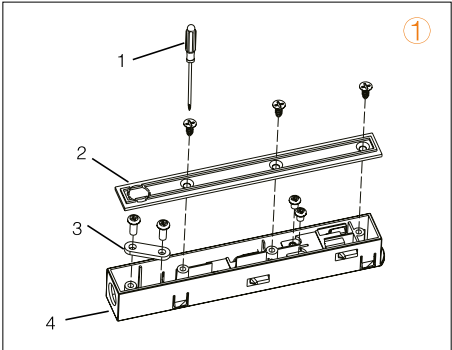


- 1 Input Connecting Box Cover
- 2 Screw Driver
- 3 Crimping Cap
- 4 DC Connecting Box

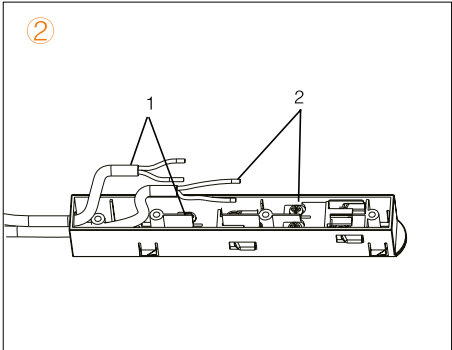


- 1 0-10V/DALI Singal Wire
- 2 48V DC Input Wire

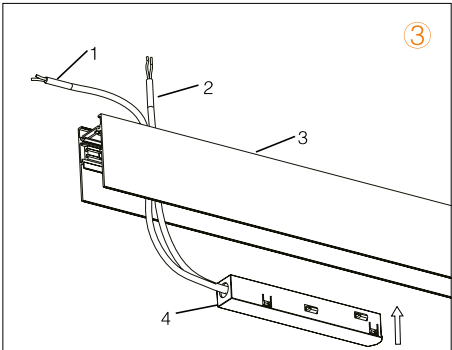

- 1 0-10V/DALI Dimmer
- 2 DC48V Driver
- 3 Track
- 4 DC Connecting Box

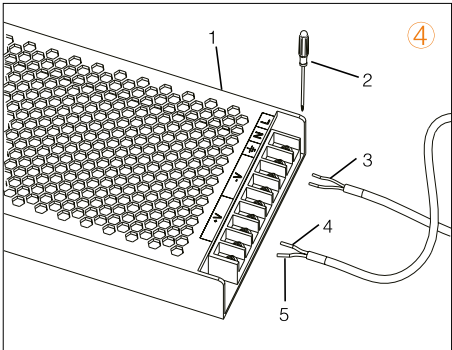

- 1 DC48V Driver
- 2 Screw Driver
- 3 Connect L/N
- 4 Connect - V
- 5 Connect +V

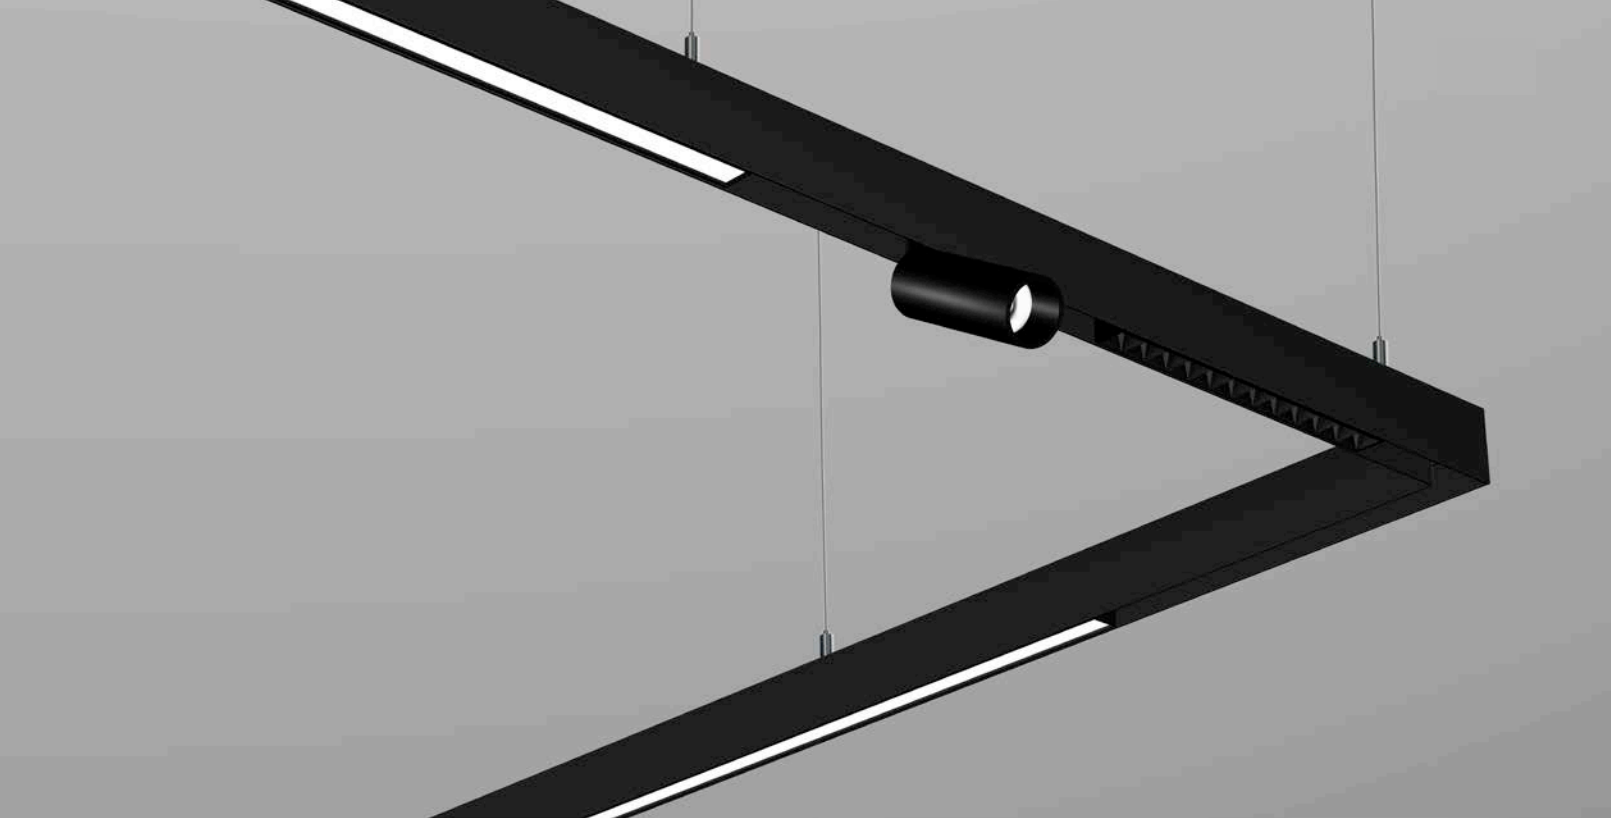

EXTERNAL POWER SUPPLY



Code No.:CD100

Power	100W
Input	AC220~240V
Output	48V
Size	129*97*30MM



Code No.:CD150

Power	150W
Input	AC220~240V
Output	48V
Size	159*97*30MM



Code No.:CD200

Power	200W
Input	AC220~240V
Output	48V
Size	215*97*30MM



Code No.:CD350

Power	350W
Input	AC220~240V
Output	48V
Size	215*97*30MM

INTERNAL POWERSUPPLY



Code No.:CD100M

Power	100W
Input	AC220~240V
Output	48V
Size	235*22*43MM



Code No.:CD200M

Power	200W
Input	AC220~240V
Output	48V
Size	305*22*43MM




Embedded installation


order installation track, light insets+ mounting accessories separately

Code No.: CA010

Size	1000mm/1500mm/2000mm/3000mm
Voltage	DC 48V
Installation	Embedded



White Black



Order No:CAL01 channel corner*V90°




Embedded installation


order installation track, light insets+ mounting accessories separately

Code No.:CB010


Size	1000mm/1500mm/2000mm/3000mm
Voltage	DC 48V
Installation	Embedded




White Black



channel corner*V90° Order No:CBL01



channel corner*H90° Order No:CBL02



channel corner*E90° Order No:CBL03




Surface mount

order installation track, light insets+ mounting accessories separately


Code No.:CM010

Size	1000mm/1500mm/2000mm/3000mm
Voltage	DC 48V
Installation	Surface mounted

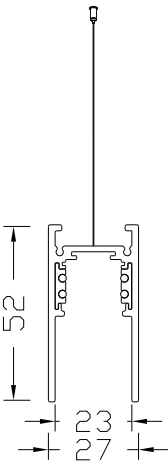


White Black


Track accessories




channel corner*V90° Order No:CML01



channel corner*H90° Order No:CML02




channel corner*E90° Order No:CML03




Dropline Order No:CTM01


Track accessories





Power feeder Order No:CTD01




Straight Connector Order No:CTD02



Flexible connector Order No:CTD03

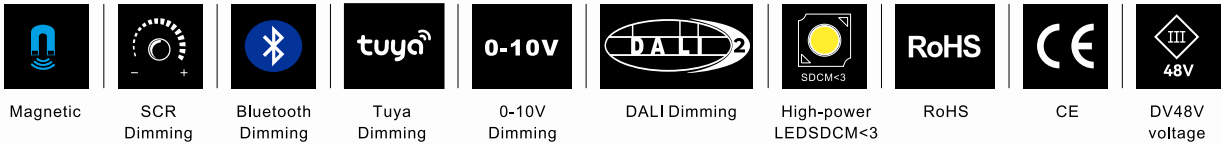



Standard Finishes



Sandy Black



Sandy White




Chrome plated






Brushed gold



Special Finishes

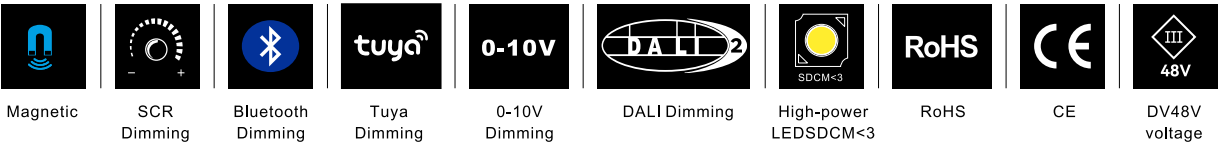

MAGNETIC



C1001



C1201




Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1001	MAX 6W	48V	150mA	24°/36°60°	369 lm	90	20	Magnetic
C1201	MAX 2*6W	48V	150mA	24°/36°60°	2*369 lm	90	20	

Optical accessories





Luminescent chip





C1002



C1202


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1002	MAX 8W	48V	200mA	15°/24°/36°60°	720 lm	90	20	Magnetic
C1202	MAX 2*8W	48V	200mA	15°/24°/36°60°	2*720 lm	90	20	

Optical accessories






Honey Comb Spread Optics Solite Optics



Luminescent chip



2700K | 3000K | 3500K | 4000K | 5000K



C1003



C1203

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1003	MAX 12W	48V	300mA	15°/24°/36°60°	1020 lm	90	20	Magnetic
C1203	MAX 2*12W	48V	300mA	15°/24°/36°60°	2*1020 lm	90	20	

Optical accessories



Honey Comb Spread Optics Solite Optics




Luminescent chip





2700K | 3000K | 3500K | 4000K | 5000K



MAGNETIC



C1004




C1204

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1004	MAX 15W	48V	350mA	15°/24°/36°60°	1425 lm	90	20	Magnetic
C1204	MAX 2*15W	48V	2*350mA	15°/24°/36°60°	2*1425 lm	90	20	




Optical accessories





Luminescent chip



MAGNETIC



C1005




C1006

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1005	MAX 25W	48V	600mA	15°/24°/36°60°	2135 lm	90	20	Magnetic
C1006	MAX 30W	48V	700mA	15°/24°/36°60°	2530 lm	90	20	

Optical accessories





Luminescent chip





MAGNETIC



C1007

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C1007	MAX 15W	36V	350mA	15°/24°/36°/60°	1042 lm	90	20	Magnetic

Optical accessories




Luminescent chip





Magnetic



0-10V
Dimming



DALI
Dimming



tuya
Dimming



Bluetooth
Dimming



CRI > 90



High-power LED
SDCM < 3



Anti-Glare





DC 48V



- Magnetic
- 0-10V Dimming
- DALI Dimming
- Tuya Dimming
- Bluetooth Dimming
- CRI>90
- High-power LED SDCM<3
- Anti-Glare
- DC 48V

MAGNETIC

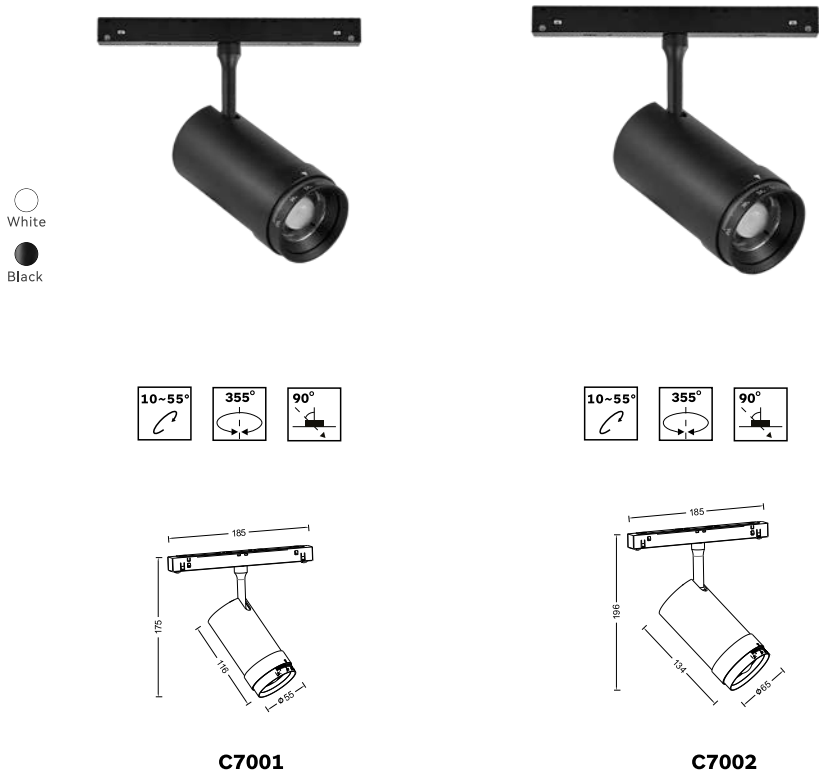


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C7001	MAX 15W	48V	350mA	15°~55°	996 lm	90	20	Magnetic
C7002	MAX 20W	48V	500mA	15°~55°	1260 lm	90	20	

Luminescent chip







Magnetic



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming



High-power
LEDSDCM<3



RoHS






CE





DV48V
voltage





MAGNETIC



C9001



C9002





C9003


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C9001	MAX 6W	48V	150mA	24°/50°	433 lm	90	20	Magnetic
C9002	MAX 15W	48V	350mA	24°/50°	955 lm	90	20	
C9003	MAX 20W	48V	500mA	24°/50°	1266 lm	90	20	

Luminescent chip







15°



24°



36°



50°



50°x50°



70°x70°



35°x75°



90°x90°



polarized



SCR
Dimming



Bluetooth
Dimming



Tuya
Dimming



0-10V
Dimming



DALI Dimming




High-power
LEDSDCM<3






RoHS



CE

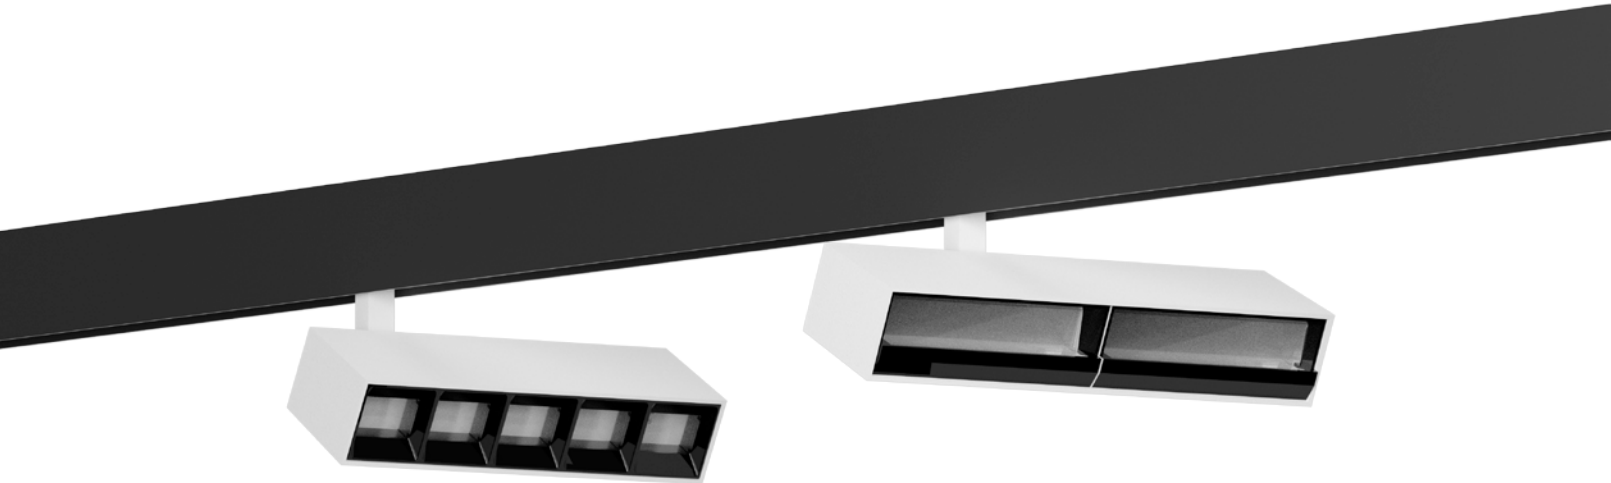


MAGNETIC



C2003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C2003	MAX 25W	48V	600mA	15°/24°/36°50°/50°*50°/ 70°*70°/35°*75°/90°*90°/ polarized	1760 lm	90	20	Magnetic

Luminescent chip



SMD





OSRAM bridgelux



2700K | 3000K | 3500K | 4000K | 5000K





MAGNETIC



White
Black




C2001



C2002

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C2001	MAX 8W	48V	200mA	24°/36°	1252 lm	90	20	Magnetic
C2002	MAX 15W	48V	350mA	24°/36°	1340 lm	90	20	



Luminescent chip



OSRAM
2700K | 3000K | 3500K | 4000K | 5000K




MAGNETIC




C3001



C3002

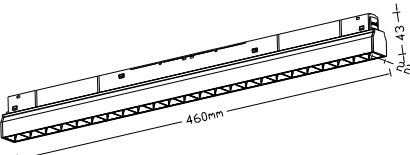

C3003



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C3001	MAX 8W	48V	200mA	24°/36°	652 lm	90	20	Magnetic
C3002	MAX 15W	48V	350mA	24°/36°	1390 lm	90	20	
C3003	MAX 30W	48V	700mA	24°/36°	2160 lm	90	20	



Luminescent chip

SMD


 
2700K | 3000K | 3500K | 4000K | 5000K




MAGNETIC




C6001



C6002

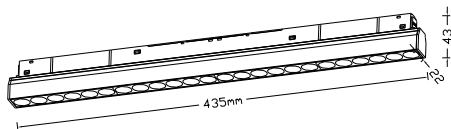

C6003



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C6001	MAX 8W	48V	200mA	24°/36°	652 lm	90	20	Magnetic
C6002	MAX 15W	48V	350mA	24°/36°	1390 lm	90	20	
C6003	MAX 30W	48V	700mA	24°/36°	2160 lm	90	20	


Luminescent chip






OSRAM
2700K | 3000K | 3500K | 4000K | 5000K

bridgelux

MAGNETIC




White
Black




Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C4030	MAX 10W	48V	250mA	110°	620 lm	90	20	Magnetic
C4060	MAX 20W	48V	500mA	110°	1090 lm	90	20	
C4090	MAX 30W	48V	700mA	110°	1860 lm	90	20	
C4120	MAX 30W	48V	700mA	110°	1860 lm	90	20	
C4150	MAX 30W	48V	700mA	110°	1890lm	90	20	

Luminescent chip




OSRAM
2700K | 3000K | 3500K | 4000K | 5000K





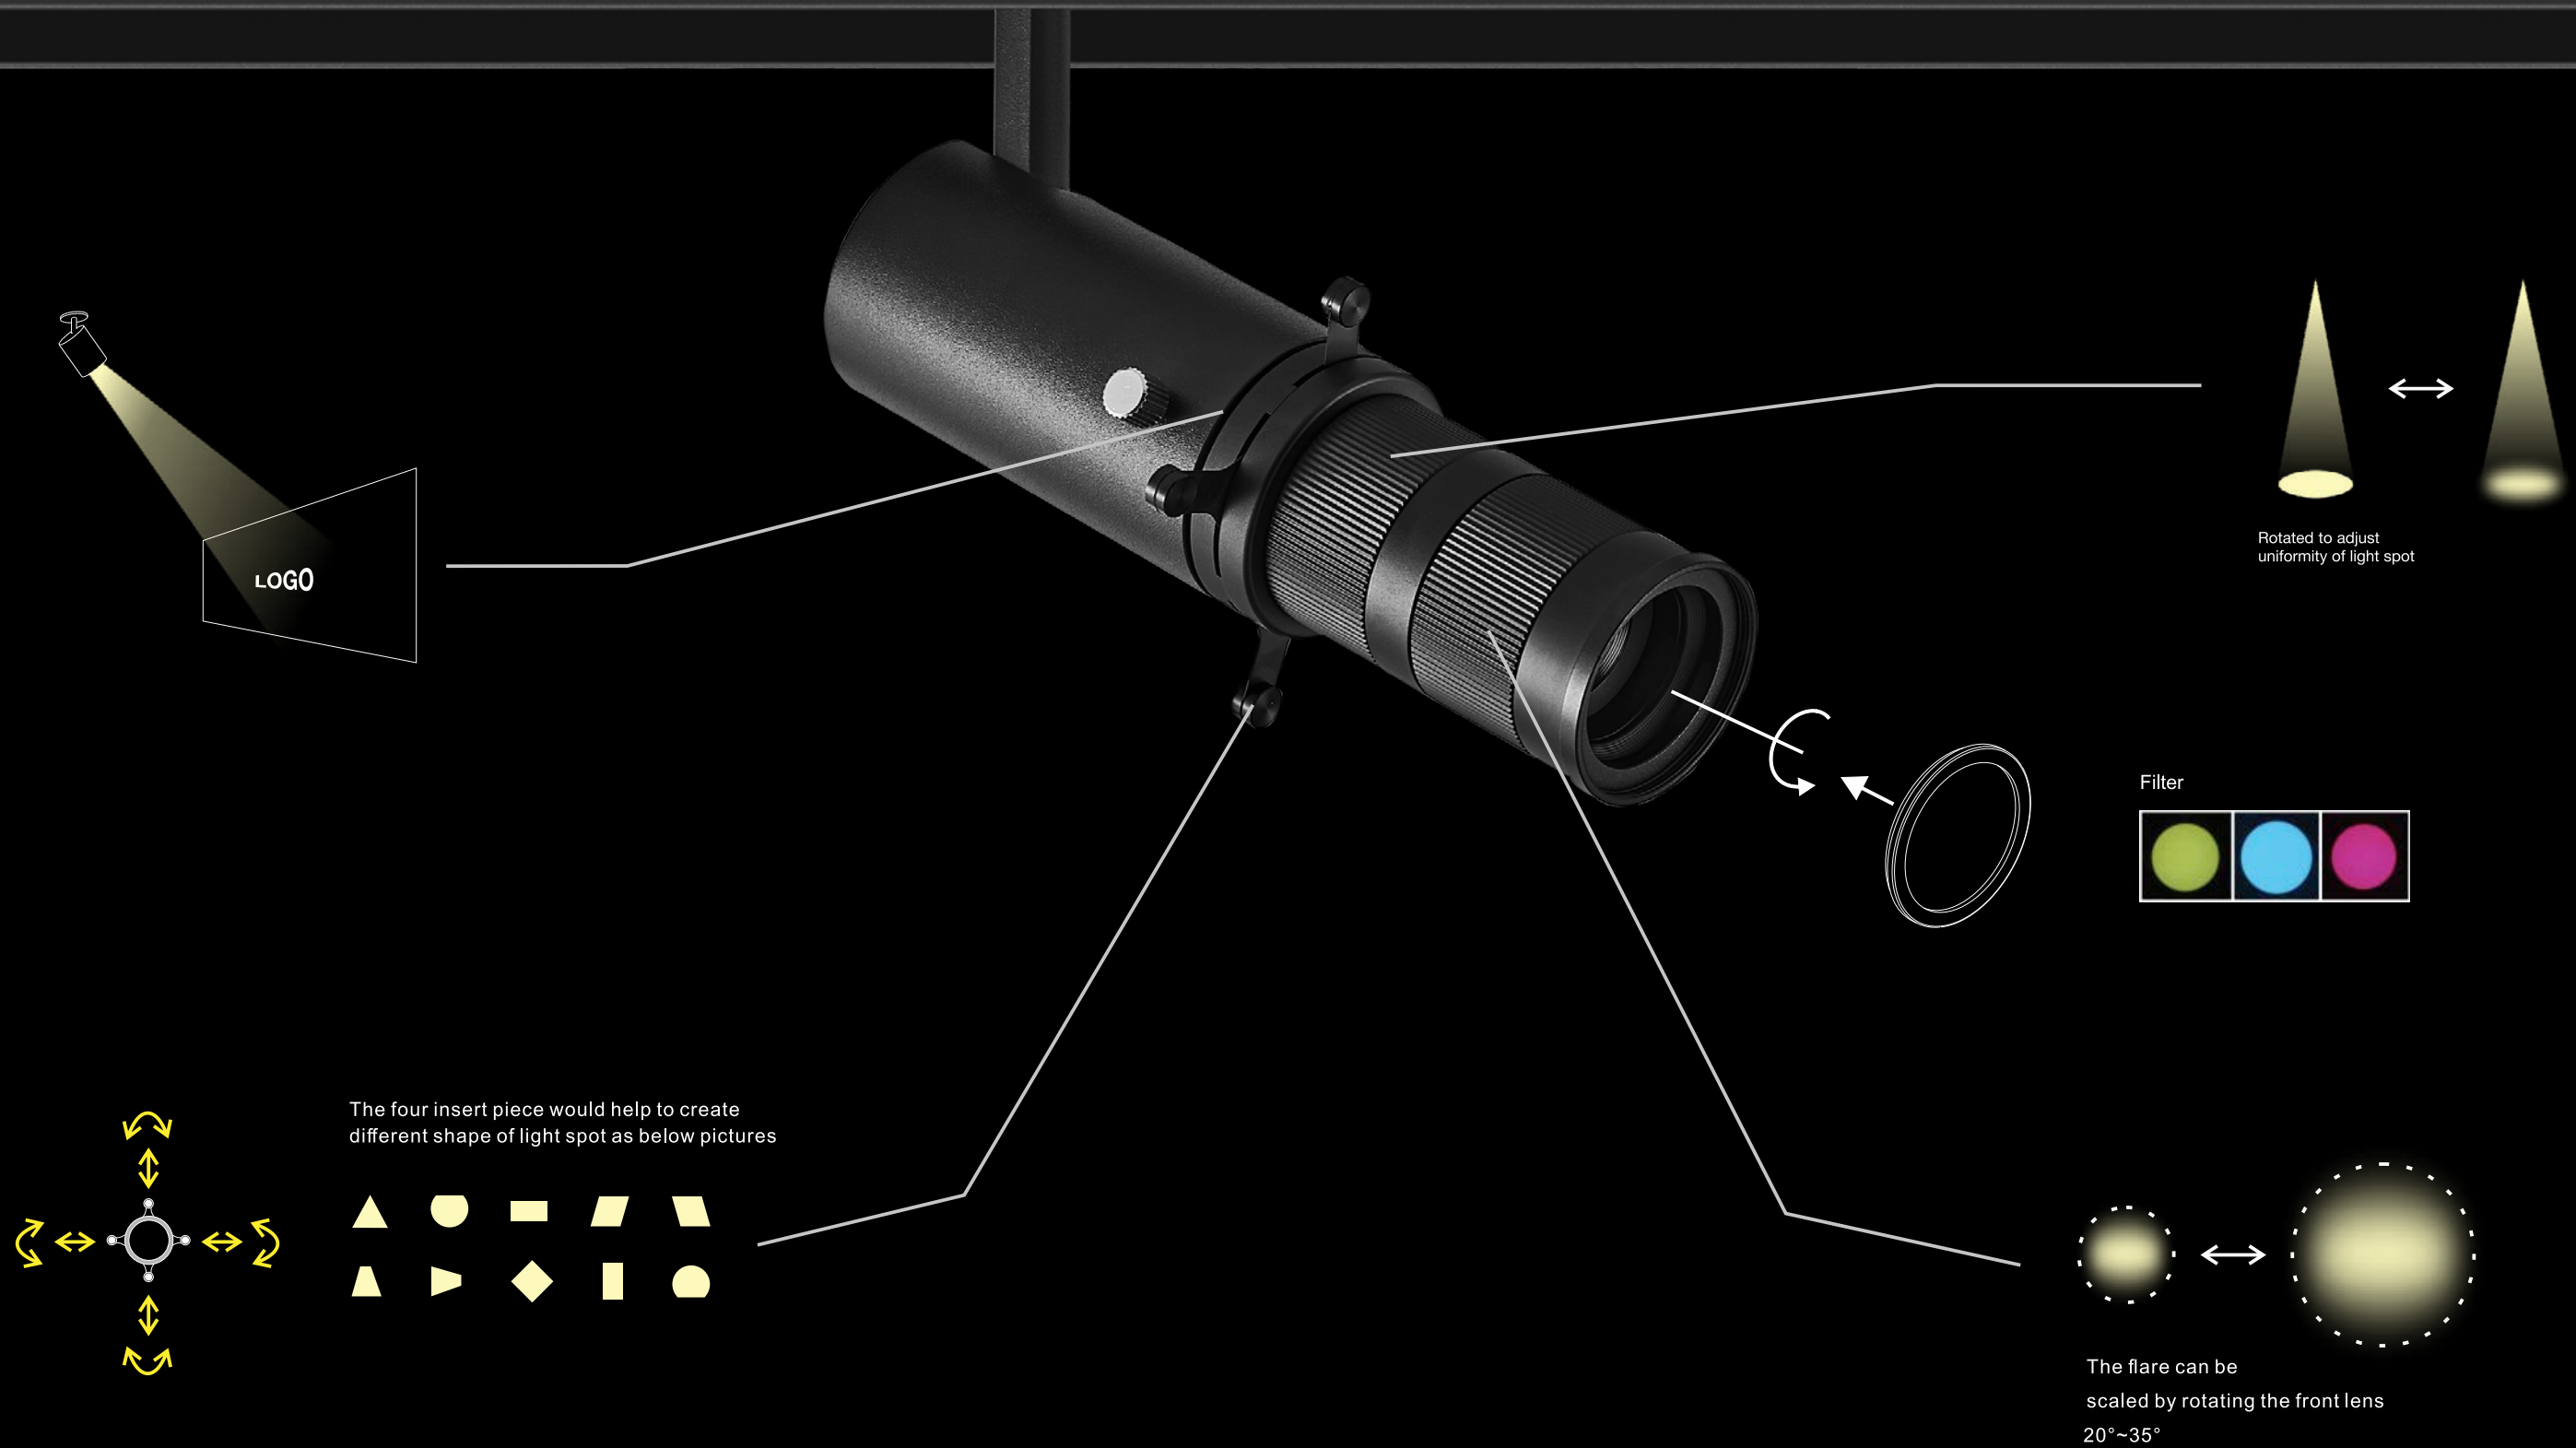



MAGNETIC



White
Black



C8001




C8001T

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C8001	MAX 12W	48V	300mA	20°~35°	790 lm	90	20	Magnetic
C8001T	MAX 12W	220~240V	300mA	20°~35°	790 lm	90	20	Track Mounted



Luminescent chip

PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K | 3000K | 3500K | 4000K | 5000K




MAGNETIC



White
Black



C8001M




C8001D



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C8001M	MAX 12W	220~240V	300mA	20°~35°	790 lm	90	20	Surface mounted
C8001D	MAX 12W	220~240V	300mA	20°~35°	790 lm	90	20	Embedded

Luminescent chip



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K | 3000K | 3500K | 4000K | 5000K





MAGNETIC



C8002T




C8002D






C8002M

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C8002T	MAX 30W	220-240V	700mA	25°~40°/50°~60°	1522 lm	90	20	Track Mounted
C8002D	MAX 30W	220-240V	700mA	25°~40°/50°~60°	1522 lm	90	20	Embedded
C8002M	MAX 30W	220-240V	700mA	25°~40°/50°~60°	1522 lm	90	20	Surface mounted

Luminescent chip



2700K | 3000K | 3500K | 4000K | 5000K

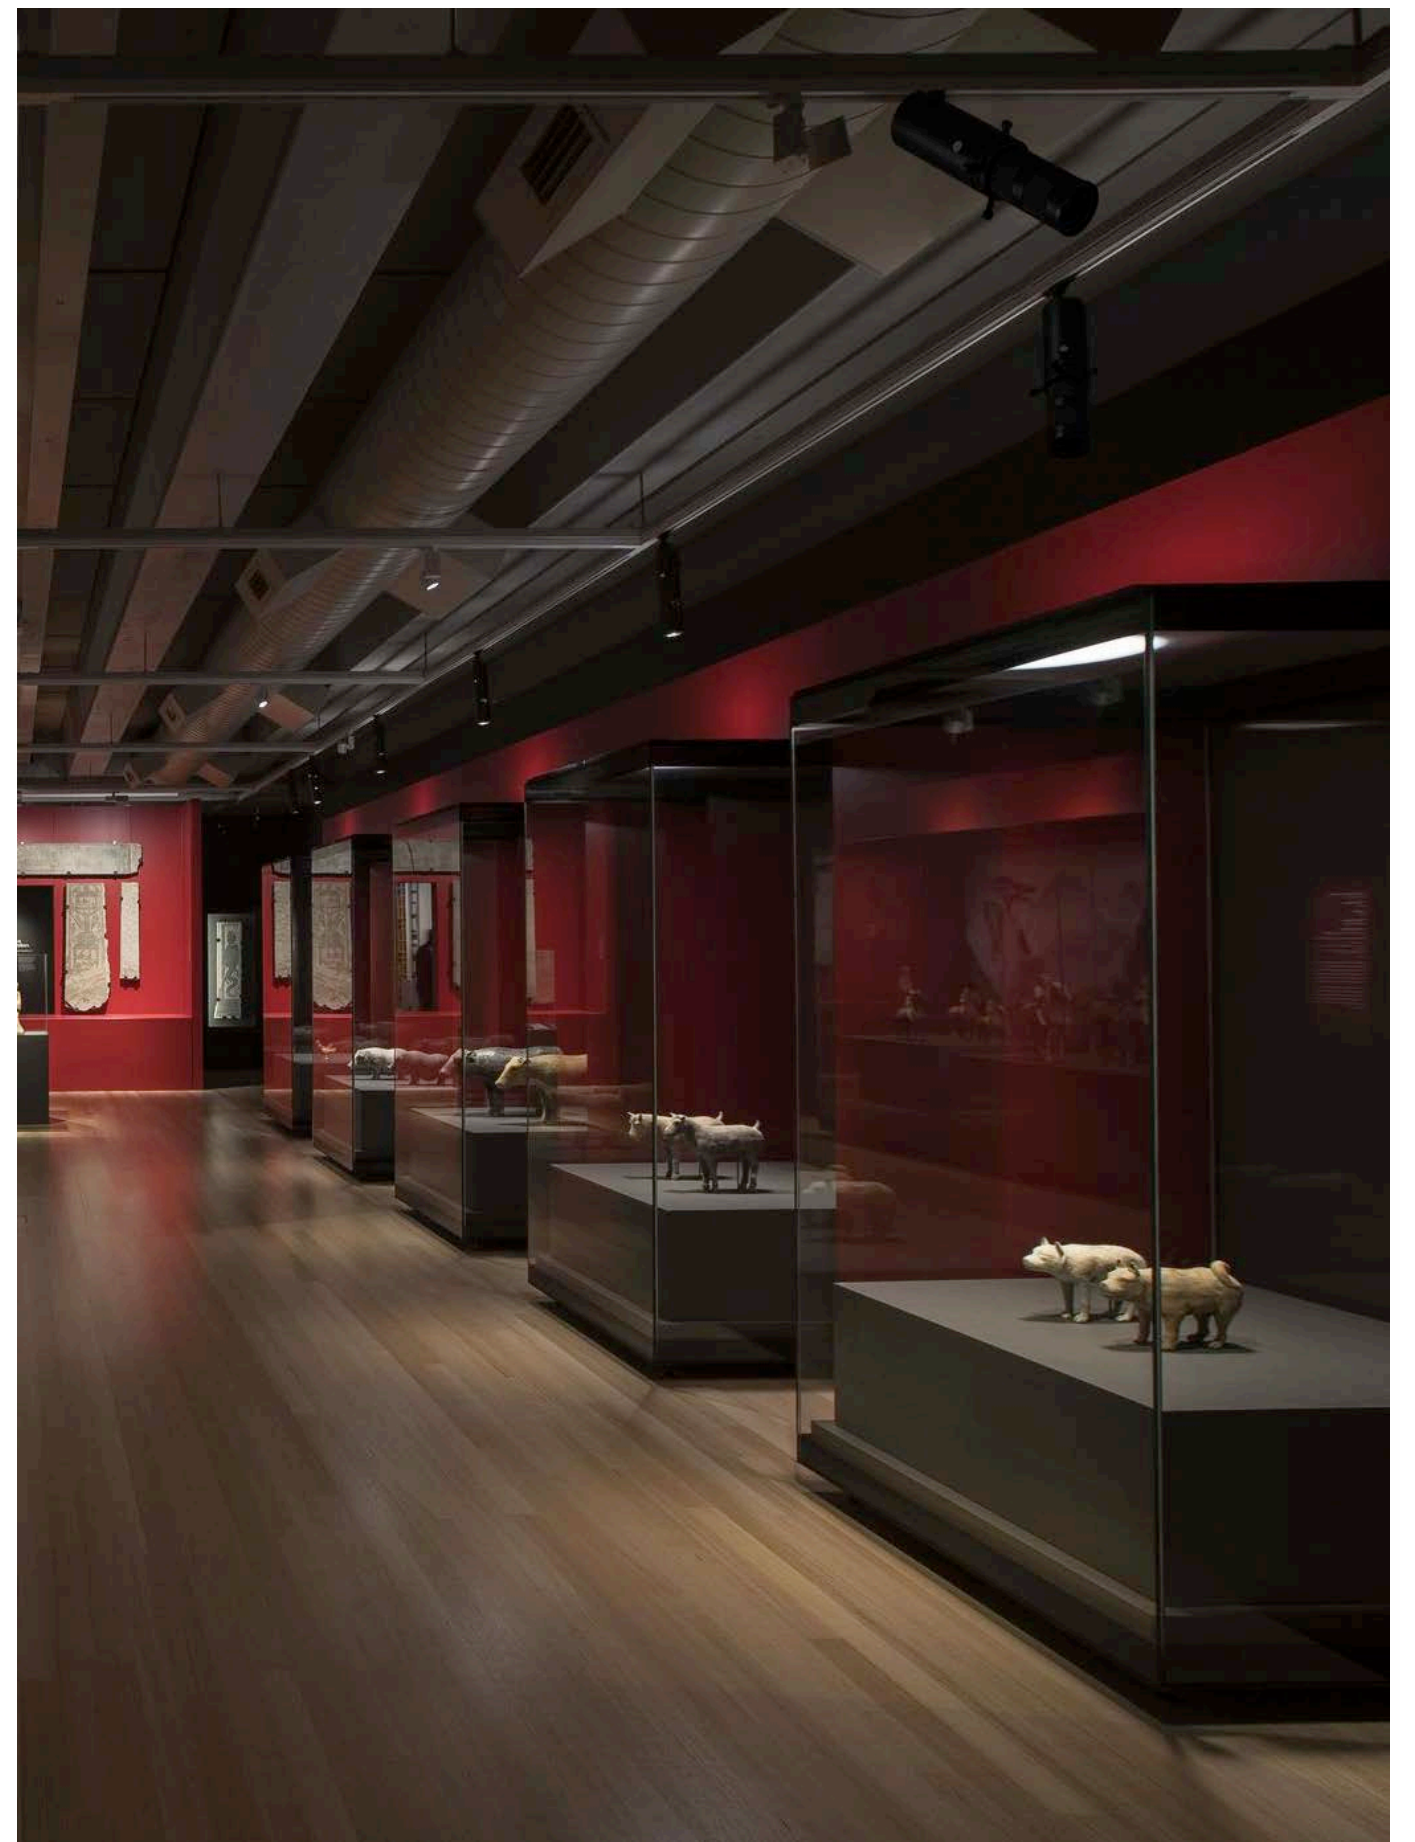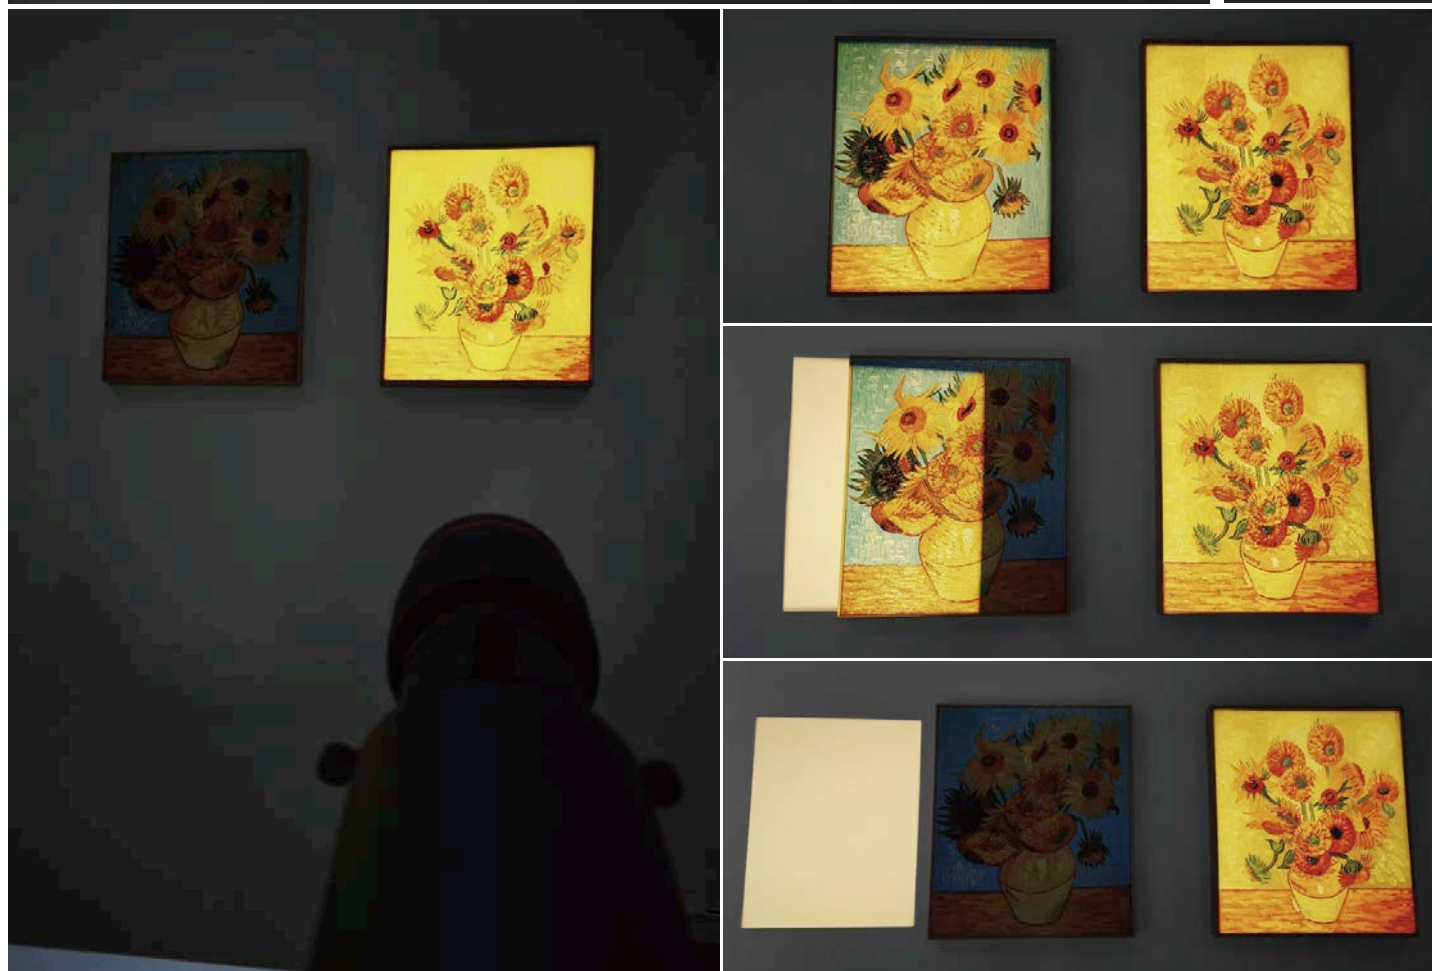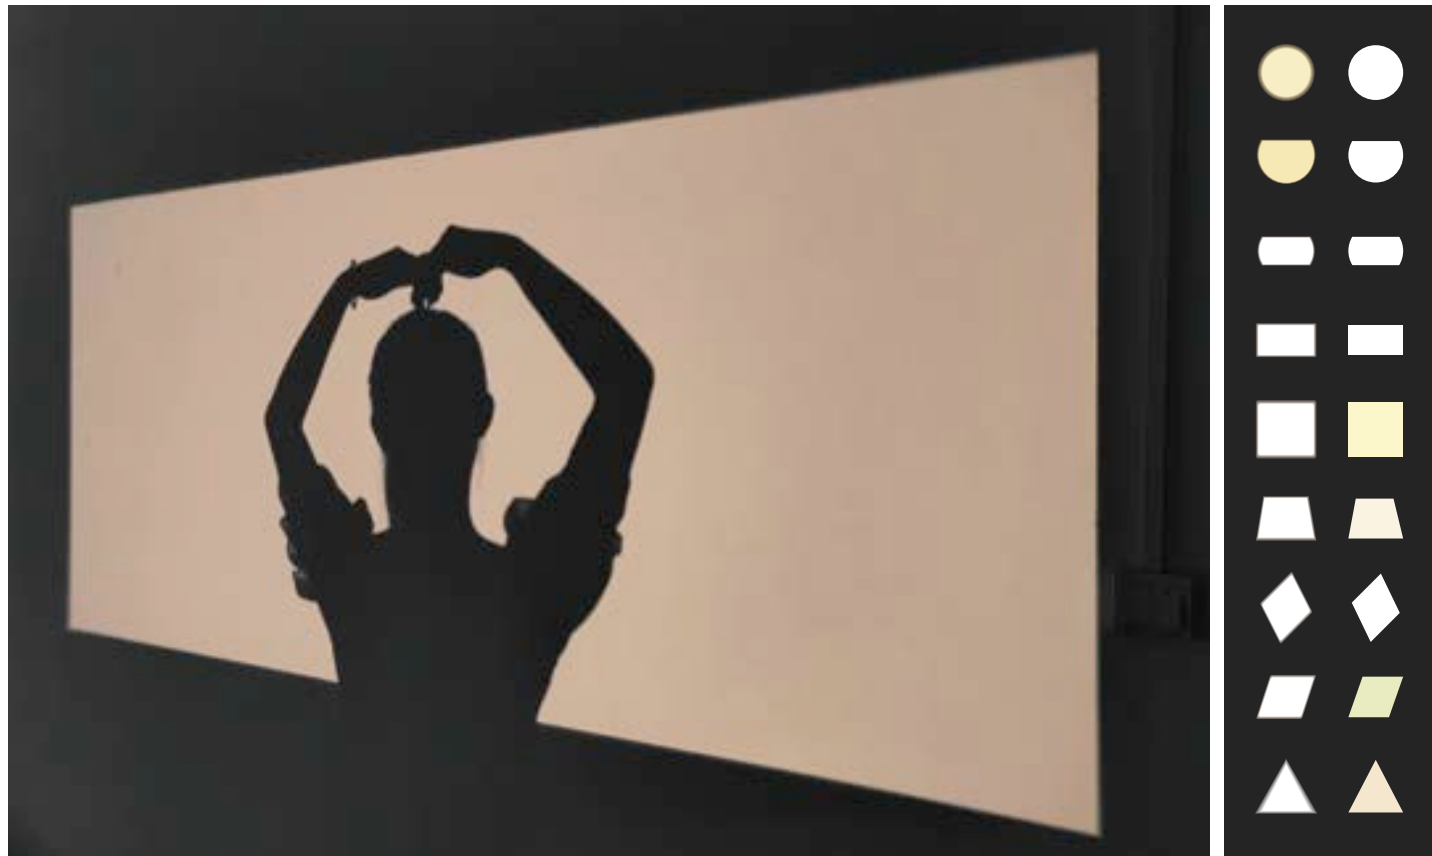





UFO LAMP



Magnetic



0-10V Dimming



DALI Dimming



Tuya Dimming



Bluetooth Dimming



CRI>90



High-power LED SDCM<3




Anti-Glare



DC 48V

MAGNETIC



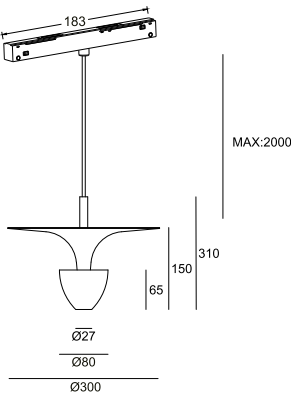

MAX:2000

C5001

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5001	MAX 6W	48V	150mA	15°/24°/36°/60°	312 lm	90	20	Magnetic


Luminescent chip



2700K | 3000K | 3500K | 4000K | 5000K

Up and down glow



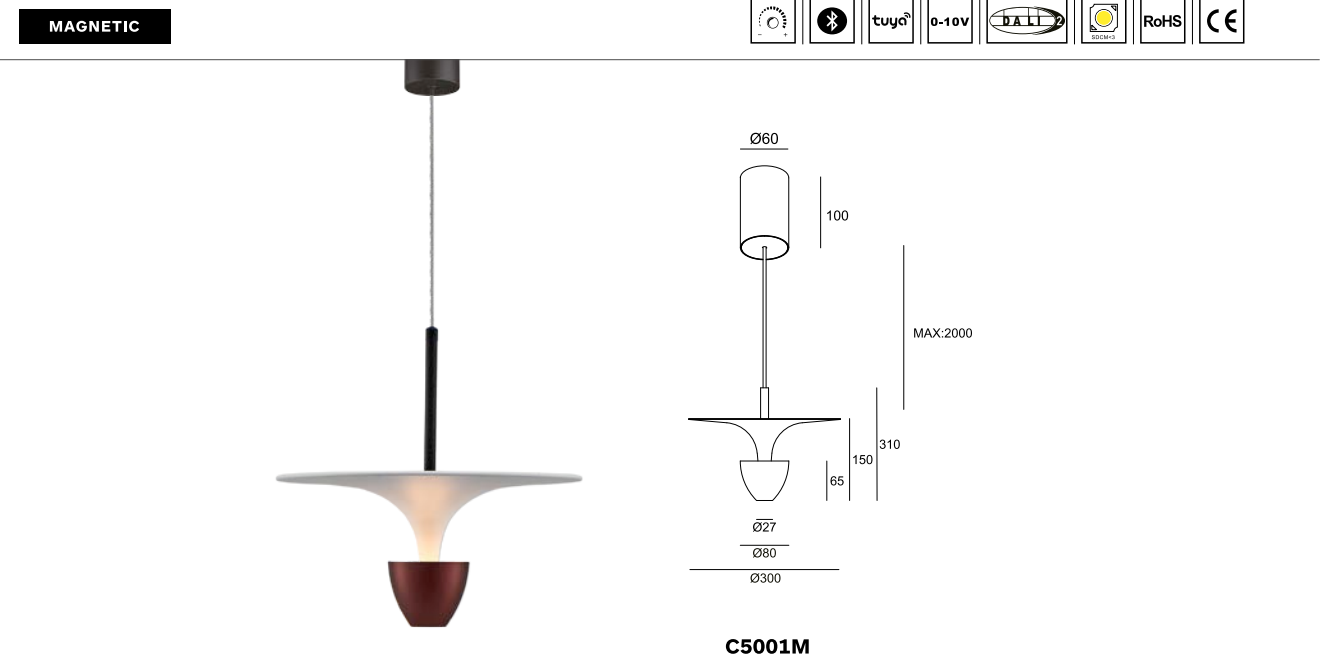

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5001M	MAX 6W	220~240V	150mA	15°/24°/36°/60°	315 lm	90	20	Surface mounted

Luminescent chip

 **PHILIPS**  **LUMINUS** **CITIZEN** **CREE**  **bridgetlux**

2700K | 3000K | 3500K | 4000K | 5000K





GREY



BLACK



WHITE



DARK CHROME



SORREL




GOLD



INDIGO

WATER DROP


The small pendant lamp can be adjusted freely,
and it shines up and down. The effect is very beautiful





C5002

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5002	MAX 6W	48V	550mA	15°/24°/36°/60°	313 lm	90	20	Magnetic

Luminescent chip





UP AND DOWN GLOW

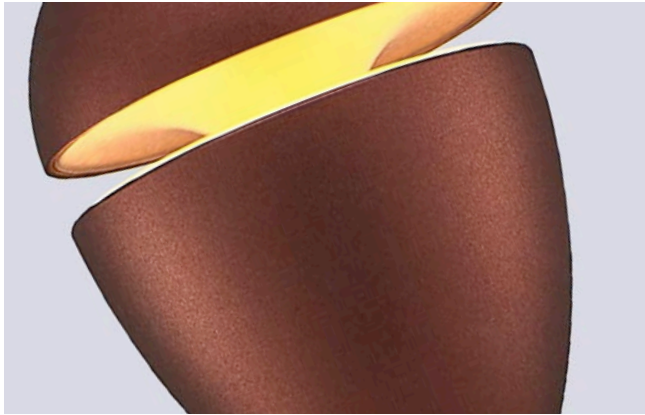


C5002M

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5002M	MAX 6W	220~240V	150mA	15°/24°/36°/60°	313 lm	90	20	Surface mounted

Luminescent chip

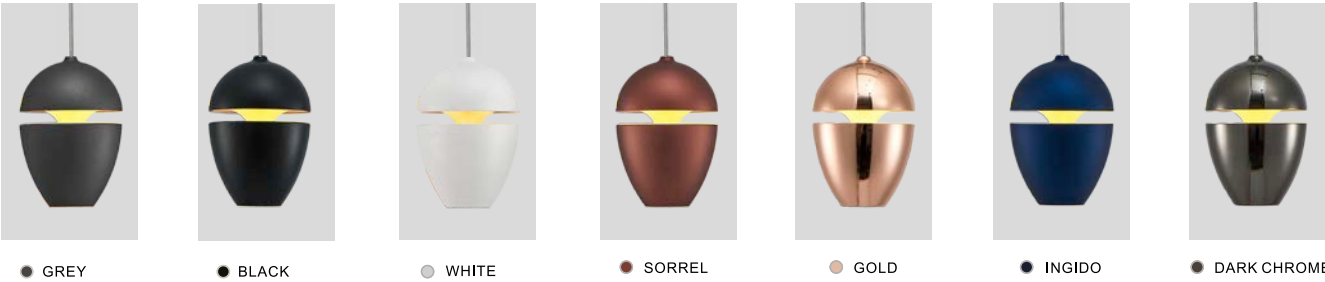



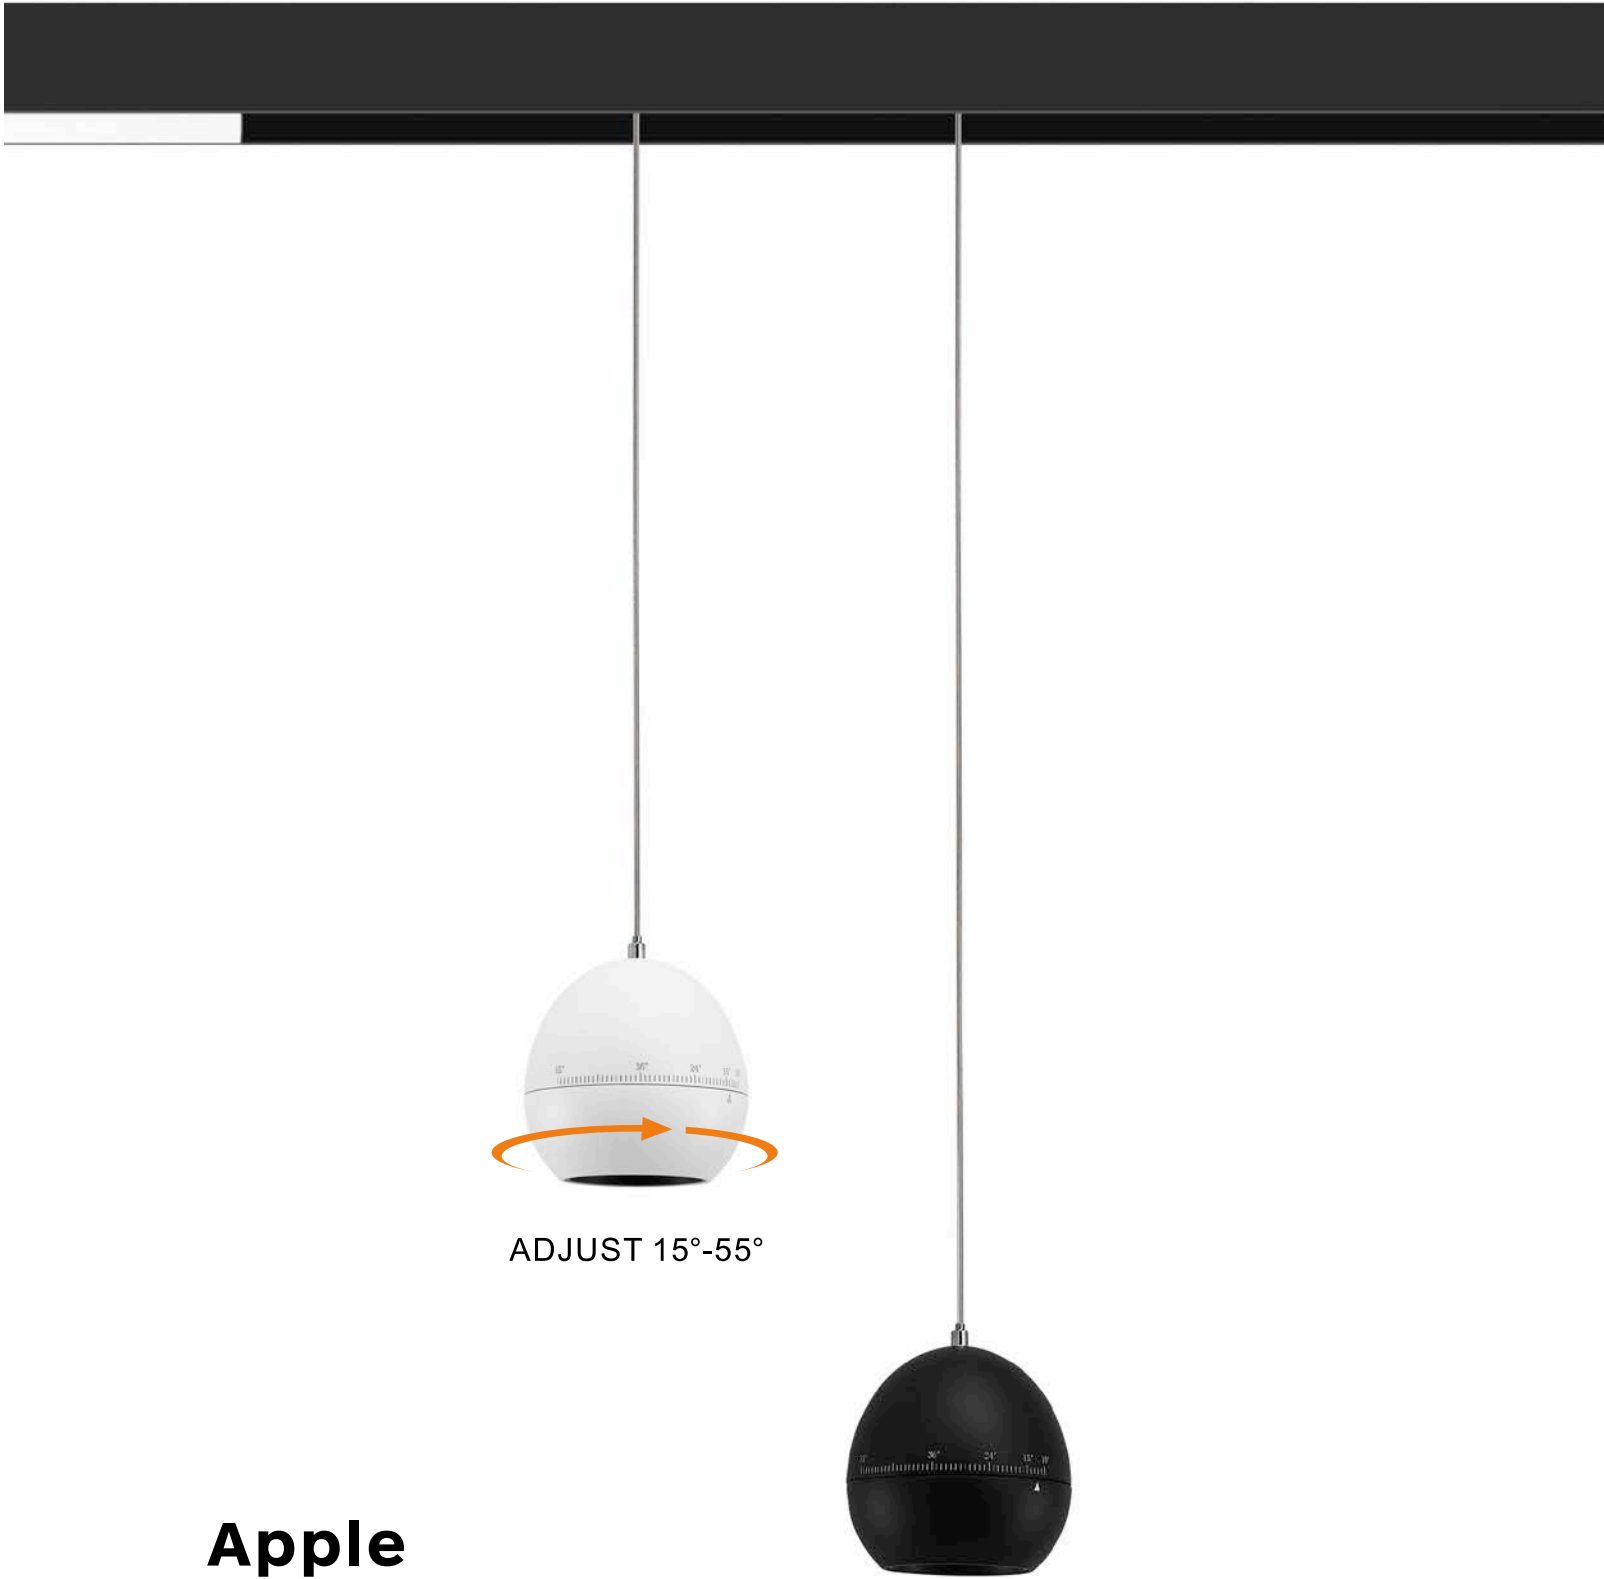

Apple

Apple Pendant lamp can freely adjust the spot size,


MAGNETIC

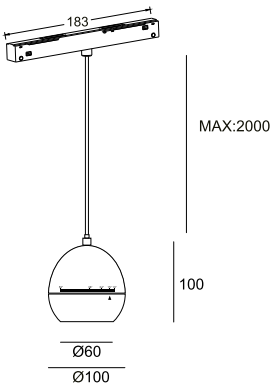

C5003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5003	MAX 10W	48V	250mA	15°~55°	508 lm	90	20	Magnetic



Luminescent chip

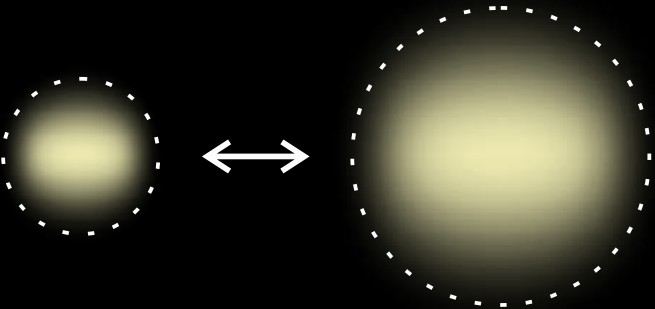

The flare can be scaled by rotating the front lens 15°~55°




MAGNETIC

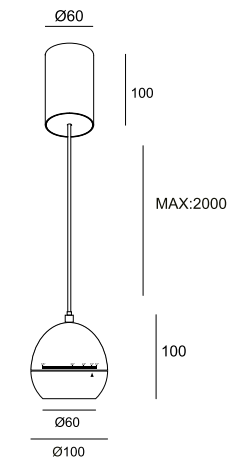

C5003M

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
C5003M	MAX 10W	220~240V	250mA	15°~55°	508 lm	90	20	Surface mounted

Luminescent chip



● black



○ white